



grado di  
autoestinguenza  
VO: UL 94

- 30°C  
+ 60°C



## TARGHETTE SEGNACAVO

per tubetti, su rotolo

# TPM-ROLL

serie  
**FLAT**


Colore	Dimensioni mm		Tipo	Imballo	SW Code
□ bianco	4x10	<b>EASY ENTRY</b>	<b>44090B</b>	16.356	<b>4020</b>
	4x12	<b>EASY ENTRY</b>	<b>44091B</b>	12.552	<b>4022</b>
	4x15	<b>EASY ENTRY</b>	<b>44092B</b>	12.552	<b>4023</b>
	4x20		<b>44093</b>	10.200	<b>4005</b>
	4x30	<b>EASY ENTRY</b>	<b>44096B</b>	6.270	<b>4026</b>
	4x40		<b>44097</b>	5.005	<b>4007</b>
■ giallo	4x10	<b>EASY ENTRY</b>	<b>44040B</b>	16.356	<b>4020</b>
	4x12	<b>EASY ENTRY</b>	<b>44041B</b>	12.552	<b>4022</b>
	4x15	<b>EASY ENTRY</b>	<b>44042B</b>	12.552	<b>4023</b>
	4x20		<b>44043</b>	10.200	<b>4005</b>
	4x30	<b>EASY ENTRY</b>	<b>44046B</b>	6.270	<b>4026</b>
	4x40		<b>44047</b>	5.005	<b>4007</b>

Le targhette **TPM-ROLL**, serie **FLAT**, vengono utilizzate per la siglatura di cavi, guaine, tubi e componentistica.

Il rotolo è strutturato a pettine: staccando gli steli che lo compongono, le targhette si presentano pronte per essere inserite nei tubetti.

**Materiale:** PVC rigido, autoestinguente cl.VO (UL 94)

🌡 Campo di temperatura da -30°C a +60°C

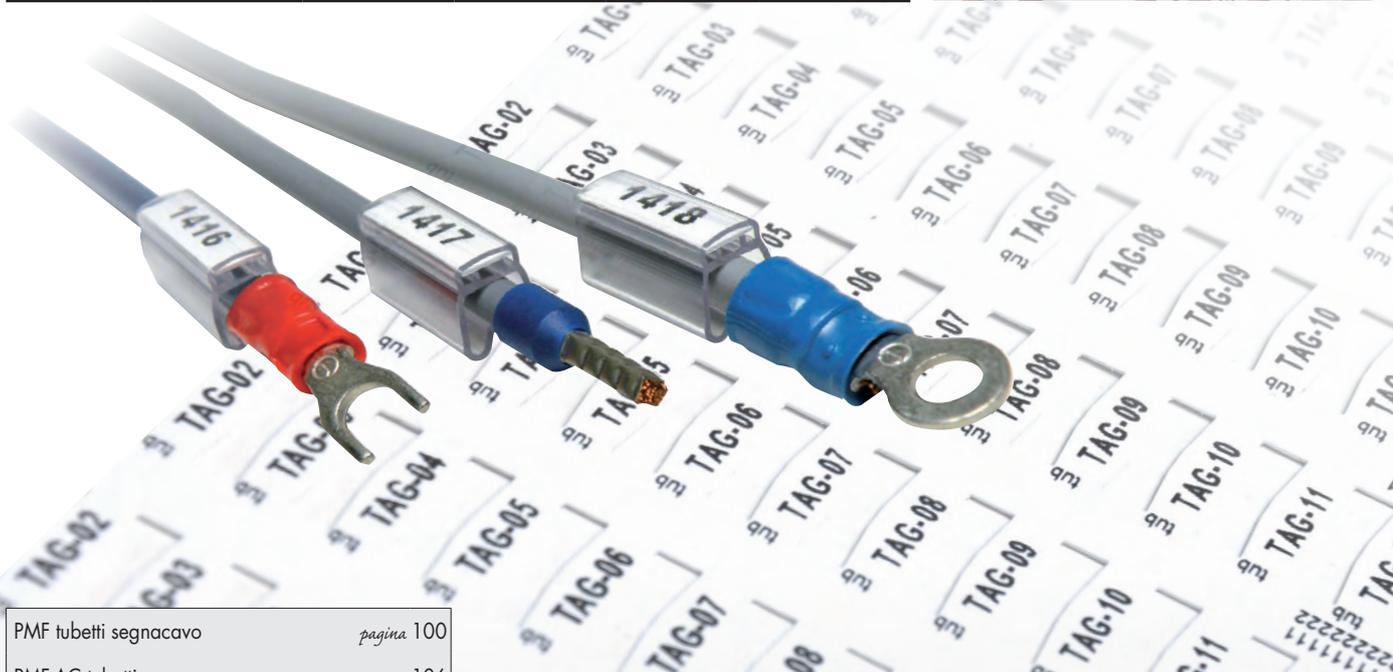

PMF tubetti segnacavo	pagina 100
PMF-AC tubetti segnacavo	106
PMF-ET tubetti segnacavo	106

### UTILIZZO

