



## CONTACT MODULE S-PKZ2



Powering Business Worldwide™


Part no.

**S/HI20-S-  
PKZ2(230V50HZ,240V60HZ)**

Article no.

**063703**

### Delivery programme

|   |   |    |    |  |
|---|---|----|----|--|
| Contact sequence  |   |    |    |  |
| Product range   |   |    |    | Accessories: PKZ2 System - PRODUCT DISCONTINUATION IN 2012                         |
| Accessories   |   |    |    | Contact module   |
| Max. motor rating   |   |    |    |  |
| AC-3  |   |    |    |  |
| 220 V<br>230 V<br>240 V   |   |    |    |  |
| 220 V 230 V   | P | kW | 11 |  |
| 380 V<br>400 V<br>415 V   |   |    |    |  |
| 380 V 400 V   | P | kW | 20 |  |
| 440 V   | P | kW | 22 |  |
| 500 V   | P | kW | 24 |  |
| 660 V<br>690 V  |   |    |    |  |
| 660 V 690 V   | P | kW | 30 |  |
| Auxiliary contacts  |   |    |    |  |
| N/O = Normally open   |   |    |    | 2 N/O  |
| For use with  |   |    |    | PKZ2(4)  |
| Actuating voltage   |   |    |    | 230 V 50 Hz, 240 V 60 Hz   |
| <b>Notes</b>  |   |    |    |  |
| Clip plate for snap-fitting the combination to be ordered separately. Can be fitted to 3- or 4-pole circuit-breaker. With clip plate fitted, can be snap fitted onto one 15 mm or two 10 mm IEC/EN 60715 top-hat rails. |   |    |    |  |
| Can be mounted separately using base (see below), RC suppressor on request  |   |    |    |  |
| The coil cannot be changed. The HI10-S-PKZ2 integral auxiliary contact is freely configurable. The auxiliary contact cannot be changed. with varistor suppressor present.   |   |    |    |  |
| High-capacity contact module Serial No.01 suitable for mounting with MV-PKZ2.   |   |    |    |  |
| <b>Notes</b>  |   |    |    |  |
| <b>Accessories</b>  |   |    |    |  |
| 1 Motor-protective circuit-breakers, circuit-breakers   |   |    |    |  |
| 3 Standard auxiliary contact  |   |    |    |  |
| 4 Standard auxiliary contact  |   |    |    |  |
| 5 Trip-indicating auxiliary contact   |   |    |    |  |
| 6 Shunt releases, undervoltage releases   |   |    |    |  |
| 7 Remote operators  |   |    |    |  |
| 9 Clip plate  |   |    |    |  |
| Other actuating voltages  |   |    |    |  |
| Other accessories   |   |    |    |  |
| <b>Page</b>   |   |    |    |  |


### Approvals

|                           |  |
|---------------------------|--|
| Product Standards         | UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking |
| UL File No.               | E36332   |
| UL CCN                    | NLRV   |
| CSA File No.              | 12528  |
| CSA Class No.             | 3211-05  |
| NA Certification          | UL listed, CSA certified                           |
| Specially designed for NA | No   |

## Technical data ETIM 4.0

|                                      |   |               |
|--------------------------------------|---|---------------|
| Rated control voltage Us at AC 50 Hz | V | 230           |
| Rated control voltage Us at AC 60 Hz | V | 240           |
| Rated control voltage Us at DC       | V | 0             |
| Design of contact module             |   | Magnet system |
| Voltage type for actuation           |   | AC            |

## Dimensions

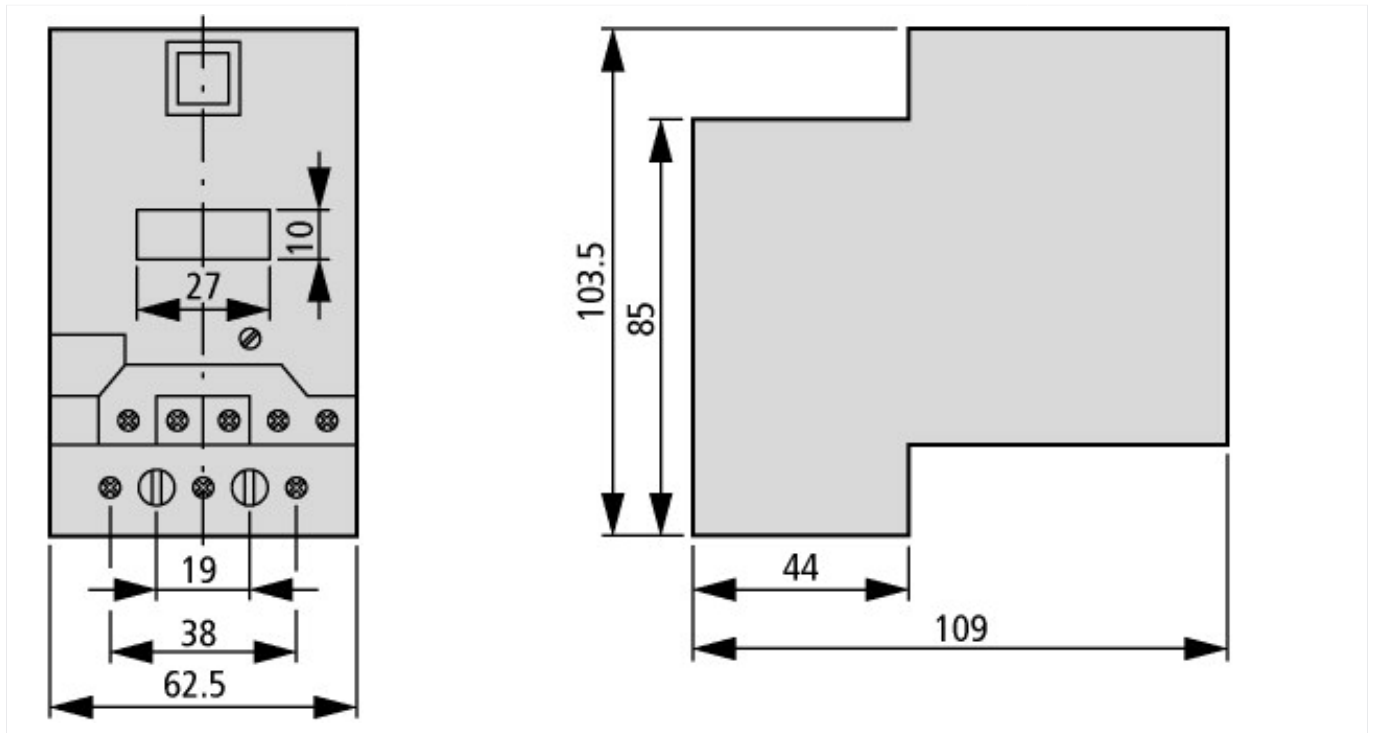

## Additional product information (links)

|  |   |
|--|---|
| <b>AWA1280-1130 Auxiliary contact for contact module</b>                   |   |
|  | AWA1280-1130 Auxiliary contact for contact module   |
| Motor starters and "Special Purpose Ratings" for the North American market | <a href="http://www.moeller.net/binary/ver_techpapers/ver953en.pdf">http://www.moeller.net/binary/ver_techpapers/ver953en.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels             | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a> |