






Short-circuit protective breaker, 3p, im=3.5A

Part no. **PKM0-0,25**  
 Catalog No. **072721**  
 Alternate Catalog No. **XTPMP25BNL**

**Delivery program**

|  |          |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
|--|----------|----|--|---|----------|-----|-----------|-----|-----------|------|-----------|------|-----------|------|-----------|------|-----------|------|-----------|-----|
| Product range  |          |    |  | PKM0 motor protective circuit-breakers up to 32 A   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| Basic function   |          |    |  | Short-circuit protective device only  |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
|  |          |    |  |                                       |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| Notes  |          |    |  | Also suitable for motors with efficiency class IE3.<br>IE3-ready devices are identified by the logo on their packaging. |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| Connection technique   |          |    |  | Screw terminals   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| Contact sequence   |          |    |  |                                       |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| <b>Max. motor rating</b>   |          |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| AC-3   |          |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| 380 V 400 V 415 V  | P        | kW |  | 0.06  |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| 440 V  | P        | kW |  | 0.06  |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| 500 V  | P        | kW |  | 0.06  |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| 660 V 690 V  | P        | kW |  | 0.12  |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| Rated uninterrupted current  | $I_u$    | A  |  | 0.25  |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| <b>Setting range</b>   |          |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| short-circuit release  |          |    |  |                                      |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| max.   | $I_{rm}$ | A  |  | 3.9   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| <p><b>Notes</b> An appropriate overload relay must be fitted to protect motors against overload.<br/>                 Can be snapped on to IEC/EN 60715 top-hat rail with 7.5 or 15 mm height.<br/>                 Refer to catalog CA034001DE for the allocation of short circuit protection and contactor</p>   |          |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| <p><b>Notes</b></p> <p>Beim Einsatz des PKM0 als Kurzschlusschutz von schwer anlaufenden Motoren muss der Bemessungsbetriebsstrom <math>I_e</math> bei der Projektierung der Schaltgeräte mit den folgenden Faktoren überdimensioniert werden:</p> <table border="0"> <tr> <td>CLASS 5:</td> <td>1,0</td> </tr> <tr> <td>CLASS 10:</td> <td>1,0</td> </tr> <tr> <td>CLASS 15:</td> <td>1,22</td> </tr> <tr> <td>CLASS 20:</td> <td>1,41</td> </tr> <tr> <td>CLASS 25:</td> <td>1,58</td> </tr> <tr> <td>CLASS 30:</td> <td>1,73</td> </tr> <tr> <td>CLASS 35:</td> <td>1,89</td> </tr> <tr> <td>CLASS 40:</td> <td>2,0</td> </tr> </table> |          |    |  |   | CLASS 5: | 1,0 | CLASS 10: | 1,0 | CLASS 15: | 1,22 | CLASS 20: | 1,41 | CLASS 25: | 1,58 | CLASS 30: | 1,73 | CLASS 35: | 1,89 | CLASS 40: | 2,0 |
| CLASS 5:   | 1,0      |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| CLASS 10:  | 1,0      |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| CLASS 15:  | 1,22     |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| CLASS 20:  | 1,41     |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| CLASS 25:  | 1,58     |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| CLASS 30:  | 1,73     |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| CLASS 35:  | 1,89     |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |
| CLASS 40:  | 2,0      |    |  |   |          |     |           |     |           |      |           |      |           |      |           |      |           |      |           |     |

**Technical data**

|                     |  |    |  |  |
|---------------------|--|----|--|--|
| <b>General</b>      |  |    |  |  |
| Standards           |  |    |  | IEC/EN 60947, VDE 0660   |
| Climatic proofing   |  |    |  | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature |  |    |  |  |
| Storage             |  | °C |  | - 40 - 80  |
| Open                |  | °C |  | -25 - +55  |
| Enclosed            |  | °C |  | - 25 - 40  |

|   |  |                 |   |
|---|--|-----------------|---|
| Mounting position   |  |                 |  |
| Direction of incoming supply  |  |                 | as required   |
| Degree of protection  |  |                 |   |
| Device  |  |                 | IP20  |
| Terminations  |  |                 | IP00  |
| Protection against direct contact when actuated from front (EN 50274)     |  |                 | Finger and back-of-hand proof   |
| Mechanical shock resistance half-sinusoidal shock 10 ms to IEC 60068-2-27 |  | g               | 25  |
| Altitude  |  | m               | Max. 2000   |
| Terminal capacity main cable  |  |                 |   |
| Screw terminals   |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 1 x (1 - 6)<br>2 x (1 - 6)  |
| Flexible with ferrule to DIN 46228  |  | mm <sup>2</sup> | 1 x (1 - 6)<br>2 x (1 - 6)  |
| Solid or stranded   |  | AWG             | 18 - 10   |
| Stripping length  |  | mm              | 10  |
| Specified tightening torque for terminal screws                           |  |                 |   |
| Main cable  |  | Nm              | 1.7   |
| Control circuit cables  |  | Nm              | 1   |

### Main conducting paths

|   |             |               |                             |
|---|-------------|---------------|-----------------------------|
| Rated impulse withstand voltage                         | $U_{imp}$   | V AC          | 6000                        |
| Overvoltage category/pollution degree                   |             |               | III/3                       |
| Rated operational voltage                               | $U_e$       | V AC          | 690                         |
| Rated uninterrupted current = rated operational current | $I_u = I_e$ | A             | 0.25                        |
| Rated frequency   | f           | Hz            | 40 - 60                     |
| Current heat loss (3 pole at operating temperature)     |             | W             | 5.15                        |
| Impedance per pole                                      |             | mΩ            | 26500                       |
| Lifespan, mechanical                                    | Operations  | $\times 10^6$ | 0.1                         |
| Lifespan, electrical (AC-3 at 400 V)                    |             |               |                             |
| Lifespan, electrical                                    | Operations  | $\times 10^6$ | 0.1                         |
| Max. operating frequency                                |             | Ops/h         | 40                          |
| Motor switching capacity                                |             |               |                             |
| AC-3 (up to 690V)                                       |             | A             | 0.25                        |
| DC-5 (up to 250V)                                       |             | A             | 0.25 (3 contacts in series) |

### Trip blocks

|   |  |    |                                   |
|---|--|----|-----------------------------------|
| Temperature compensation                              |  |    |                                   |
| to IEC/EN 60947, VDE 0660                             |  | °C | - 5 ... 40                        |
| Operating range                                       |  | °C | - 25 ... 55                       |
| Temperature compensation residual error for T > 40 °C |  |    | ≤ 0.25 %/K                        |
| short-circuit release                                 |  |    | Basic device, fixed: 15.5 x $I_u$ |
| Short-circuit release tolerance                       |  |    | ± 20%                             |

### Design verification as per IEC/EN 61439

|  |            |    |      |
|--|------------|----|------|
| Technical data for design verification                   |            |    |      |
| Rated operational current for specified heat dissipation | $I_n$      | A  | 0.25 |
| Heat dissipation per pole, current-dependent             | $P_{vid}$  | W  | 1.72 |
| Equipment heat dissipation, current-dependent            | $P_{vid}$  | W  | 5.15 |
| Static heat dissipation, non-current-dependent           | $P_{vs}$   | W  | 0    |
| Heat dissipation capacity                                | $P_{diss}$ | W  | 0    |
| Operating ambient temperature min.                       |            | °C | -25  |
| Operating ambient temperature max.                       |            | °C | 55   |
| IEC/EN 61439 design verification                         |            |    |      |

|  |  |  |
|--|--|--|
| 10.2 Strength of materials and parts   |  |  |
| 10.2.2 Corrosion resistance  |  | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |  | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |  | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |  | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |  | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |  |
| 10.9.2 Power-frequency electric strength   |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

|   |    |  |  |
|---|----|--|--|
| Low-voltage industrial components (EG000017) / Motor protection circuit-breaker (EC000074)  |    |  |  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Motor protection circuit-breaker (ecl@ss10.0.1-27-37-04-01 [AGZ529016]) |    |  |  |
| Overload release current setting  | A  |  | 0 - 0                                    |
| Adjustment range undelayed short-circuit release  | A  |  | 3.9 - 3.9                                |
| With thermal protection   |    |  | No                                       |
| Phase failure sensitive   |    |  | No                                       |
| Switch off technique  |    |  | Magnetic                                 |
| Rated operating voltage   | V  |  | 690 - 690                                |
| Rated permanent current I <sub>u</sub>  | A  |  | 0.25                                     |
| Rated operation power at AC-3, 230 V  | kW |  | 0  |
| Rated operation power at AC-3, 400 V  | kW |  | 0.06                                     |
| Type of electrical connection of main circuit   |    |  | Screw connection                         |
| Type of control element   |    |  | Turn button                              |
| Device construction   |    |  | Built-in device fixed built-in technique |
| With integrated auxiliary switch  |    |  | No                                       |
| With integrated under voltage release   |    |  | No                                       |
| Number of poles   |    |  | 3  |
| Rated short-circuit breaking capacity I <sub>cu</sub> at 400 V, AC  | kA |  | 150                                      |
| Degree of protection (IP)   |    |  | IP20                                     |
| Height  | mm |  | 93                                       |
| Width   | mm |  | 45                                       |
| Depth   | mm |  | 76                                       |


## Approvals

|                                      |  |  |    |
|--------------------------------------|--|--|----|
| Specially designed for North America |  |  | No |
|--------------------------------------|--|--|----|

## Characteristics



- 1: Standard auxiliary contact
- 2: Trip-indicating auxiliary contact
- 3: Shunt releases, undervoltage releases


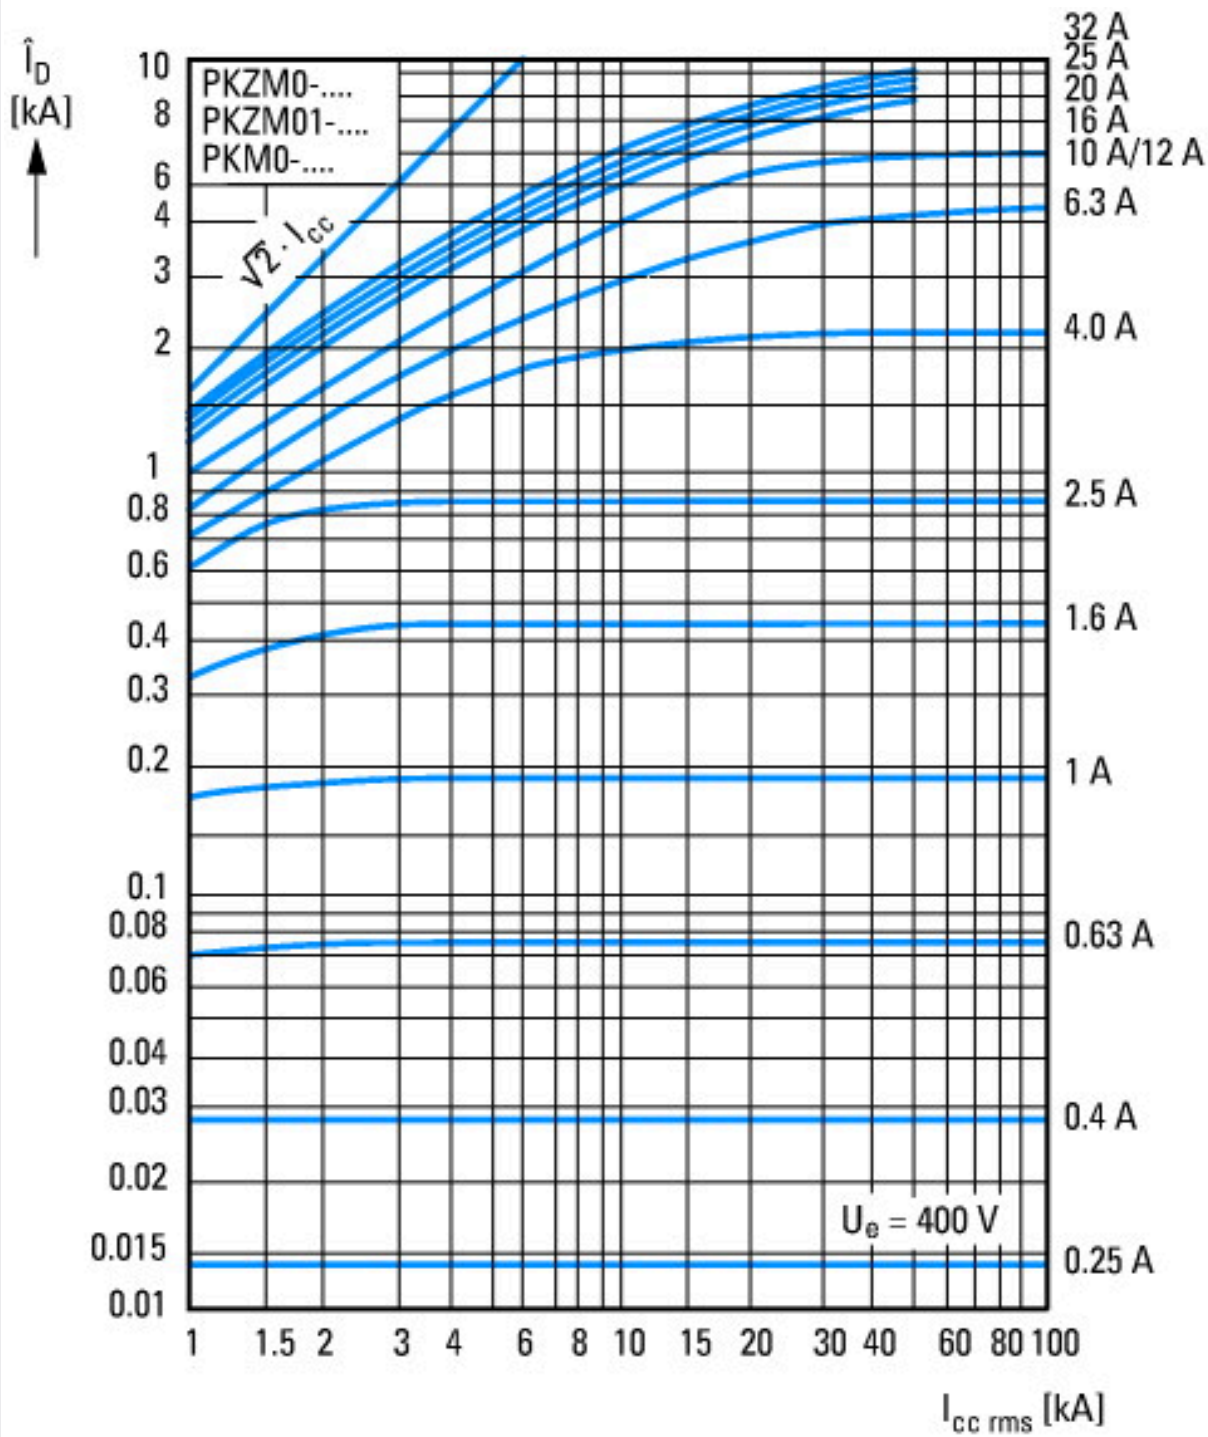


Let-through current





① 1 half-cycle  
 Let-through energy

## Dimensions

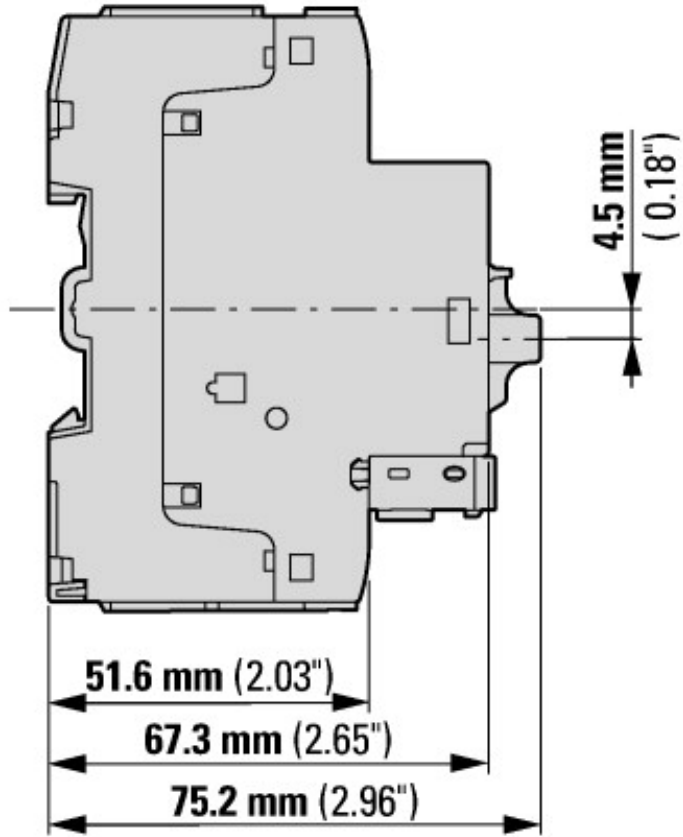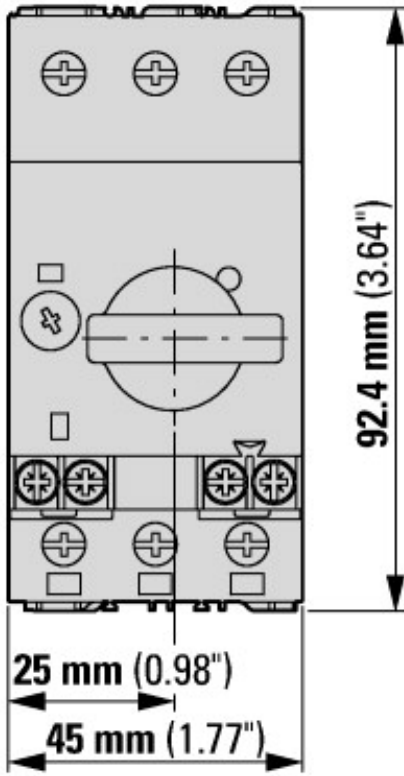

Motor-protective circuit-breaker with standard auxiliary contact  
 PKZM0-...(+NHI-E-...-PKZ0)  
 PKZM0-...-T(+NHI-E-...-PKZ0)  
 PKM0-...(+NHI-E-...-PKZ0)

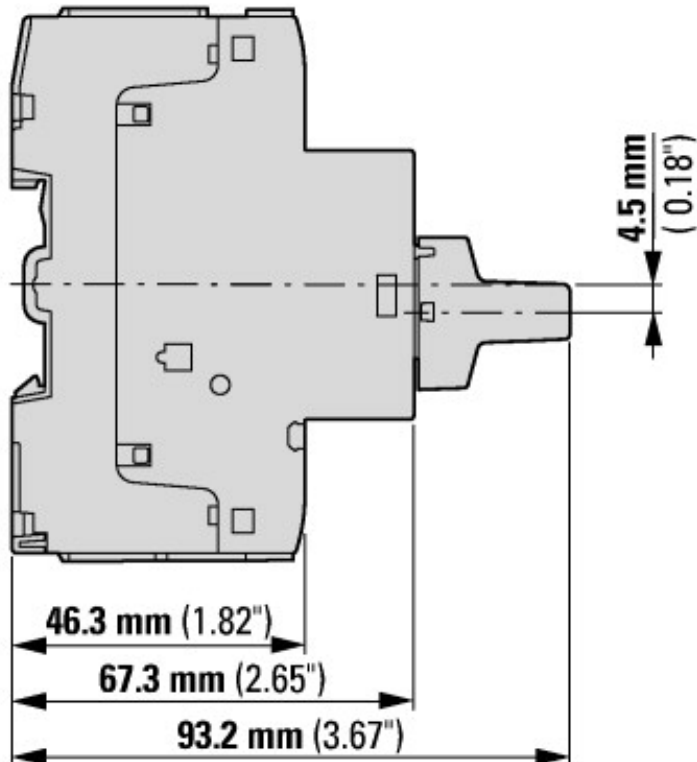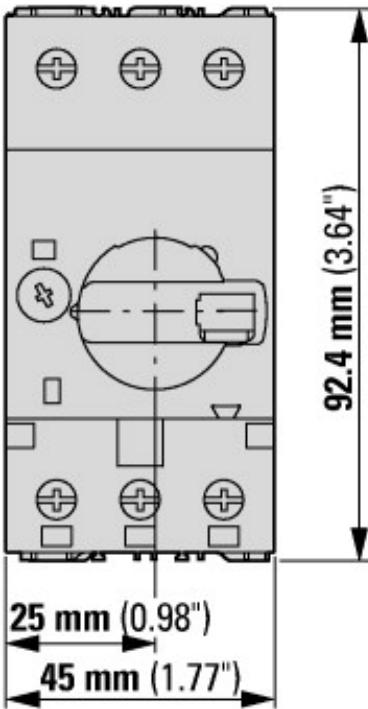

Motor-protective circuit-breakers with lockable rotary handles  
 PKZM0-...+AK-PKZ0



Motor-protective circuit-breakers with early-make auxiliary contacts  
PKZM0-...+VHI-...-PKZ0

## Assets (links)

### Declaration of CE Conformity

00002887

### Instruction Leaflets

IL03407011Z2018\_04

## Additional product information (links)

### IL03407011Z (AWA1210-1925) Motor-protective circuit-breaker

IL03407011Z (AWA1210-1925) Motor-protective circuit-breaker [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03407011Z2018\\_04.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407011Z2018_04.pdf)

### IL03402034Z (AWA121-1945) Motor-protective circuit-breaker, Starter

IL03402034Z (AWA121-1945) Motor-protective circuit-breaker, Starter [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03402034Z2018\\_06.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402034Z2018_06.pdf)

Schaltvermögen <http://de.ecat.eaton.com/flip-cat/?edition=HPLTEv1&startpage=>

Motor starters and "Special Purpose Ratings" for the North American market [http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_3258146.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf)

Busbar Component Adapters for modern Industrial control panels [http://www.moeller.net/binary/ver\\_techpapers/ver960en.pdf](http://www.moeller.net/binary/ver_techpapers/ver960en.pdf)