



Restarting device, 220-240VAC, 4HP

Part no. FAZ/FIP-XAWM
Catalog No. 262514
Alternate Catalog No. FAZ/FIP-XAWM

Delivery program

Basic function		Accessories for miniature circuit-breaker Accessories for residual current circuit-breakers
Basic function accessories		Remote switching modules
Product range		Accessory

Technical data

Electrical

Operational voltage range		V	
V AC			220 ... 240
Rated frequency	f	Hz	50/60
Relay output for alarm, 250 V AC, potential-free		A	5
Function			Automatic control
Function selector			Automatic 5 x, OFF/RESET

Mechanical

Standard front dimension		mm	45
Enclosure height		mm	80
Mounting width		mm	70
Mounting			IEC/EN 60715 top-hat rail
Degree of protection			
Integrated			IP40
Terminal protection			Protection against electric shock to IEC 536
Terminals			Lift terminals
Terminal capacities		mm ²	
Solid		mm ²	2 x 1.5 1 x 2.5
flexible		mm ²	2 x 1.5 1 x 2.5

Design verification as per IEC/EN 61439


Technical data for design verification			
Operating ambient temperature min.		°C	25
Operating ambient temperature max.		°C	40

Technical data ETIM 7.0

Devices for distribution board-/surface mounting (EG000062) / Auxiliary device for distribution board devices (EC001286)			
Electric engineering, automation, process control engineering / Electrical installation, device / Breaker switch component / Auxiliary contact unit for distribution board (ec@ss10.0.1-27-14-35-02 [AKE327013])			
Device fitting			Earth leakage switch
Additional equipment			Remote release
Attached at delivery			No
Assembly width (TE)			2
Number of contacts as normally open contact			0
Number of contacts as normally closed contact			0
Number of contacts as change-over contact			0
Number of fault-signal switches			0
Rated switch current		A	0
Rated voltage		V	230

Voltage type for actuating		AC
With auto test for earth leakage function		No
Suitable for max. number of poles main contact unit (total)		0
Suitable for max. current main contact unit	A	0

Dimensions

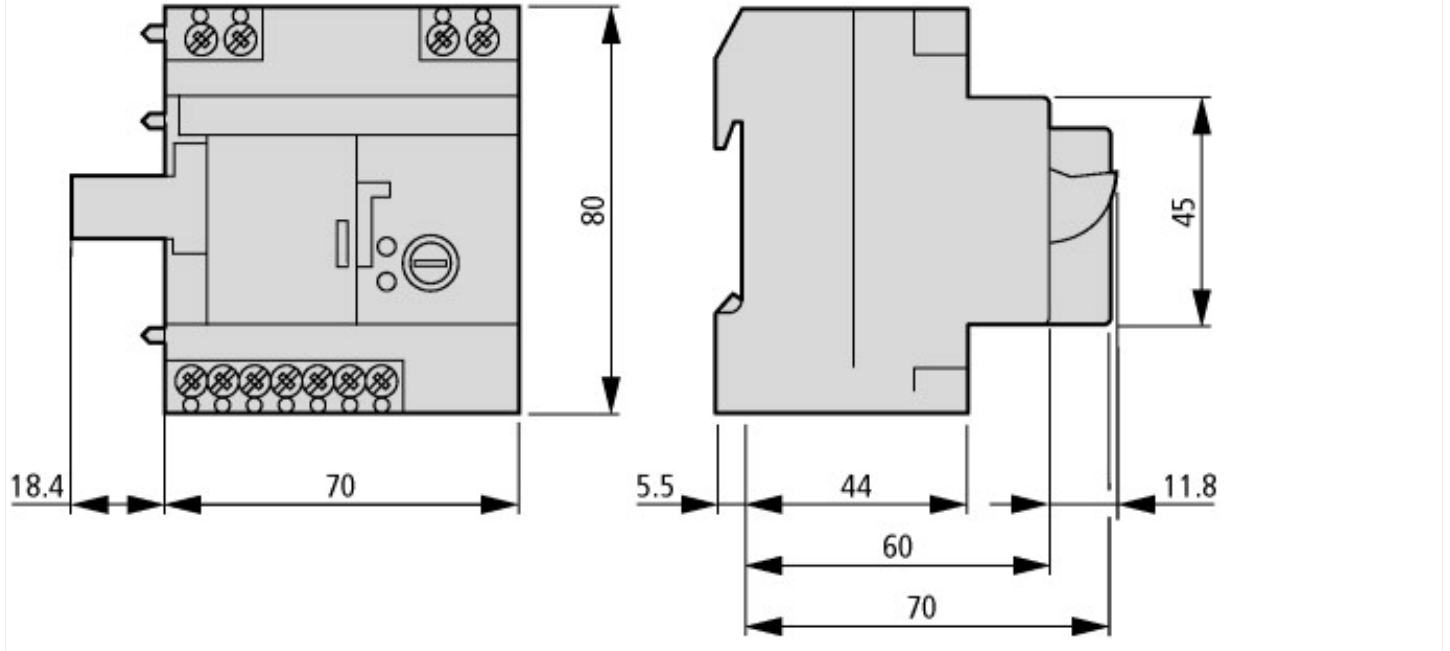

Additional product information (links)

AWA1220-1762 Remote switching and test module

AWA1220-1762 Remote switching and test module

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17620702.pdf