

# DATASHEET - DILMP20(230V50HZ,240V60HZ)



**Contactor, 4 pole, AC operation, AC-1: 22 A, 230 V 50 Hz, 240 V 60 Hz, Screw terminals**



**Part no.** DILMP20(230V50HZ,240V60HZ)  
**Catalog No.** 276970  
**Alternate Catalog No.** XTCF020B00F  
**EL-Nummer (Norway)** 4130327


## Delivery program

|   |                |   |   |
|---|----------------|---|---|
| Product range   |                |   | Contactors  |
| Application   |                |   | Contactors for 4 pole electric consumers  |
| Subrange  |                |   | Contactors up to 200 A, 4 pole  |
| Utilization category                                      |                |   | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>AC-3/AC-3e: Normal AC induction motors: Starting, switching off while running |
| Connection technique                                      |                |   | Screw terminals   |
| Number of poles   |                |   | 4 pole  |
| <b>Rated operational current</b>                          |                |   |   |
| AC-1  |                |   |   |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |   |
| at 40 °C  | $I_{th} = I_e$ | A | 22  |
| at 50 °C  | $I_{th} = I_e$ | A | 21  |
| at 55 °C  | $I_{th} = I_e$ | A | 20.5  |
| at 60 °C  | $I_{th} = I_e$ | A | 20  |
| Contact sequence  |                |   |   |
| For use with  |                |   | DILM32-XHI(C)...<br>DILA-XHI(V)(C)...   |
| Actuating voltage   |                |   | 230 V 50 Hz, 240 V 60 Hz  |
| Voltage AC/DC   |                |   | AC operation  |
| Connection to SmartWire-DT                                |                |   | no  |
| <b>Instructions</b>                                       |                |   | Contacts to EN 50 012.  |

## Technical data

### General

|                                 |              |               |  |
|---------------------------------|--------------|---------------|--|
| Standards                       |              |               | IEC/EN 60947, VDE 0660, UL, CSA  |
| Lifespan, mechanical            |              |               |  |
| AC operated                     | Operations   | $\times 10^6$ | 10   |
| DC operated                     | Operations   | $\times 10^6$ | 10   |
| Operating frequency, mechanical |              |               |  |
| AC operated                     | Operations/h |               | 5000   |
| DC operated                     | Operations/h |               | 5000   |
| Climatic proofing               |              |               | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature             |              |               |  |
| Open                            |              | °C            | -25 - +60  |
| Enclosed                        |              | °C            | - 25 - 40  |
| Storage                         |              | °C            | - 40 - 80  |
| Mounting position               |              |               |  |
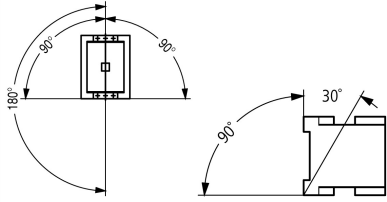
|   |  |                 |   |
|---|--|-----------------|---|
| Mounting position   |  |                 |  |
| Mechanical shock resistance (IEC/EN 60068-2-27)                       |  |                 |   |
| Half-sinusoidal shock, 10 ms  |  |                 |   |
| Main contacts   |  |                 |   |
| N/O contact   |  | g               | 10  |
| Auxiliary contacts  |  |                 |   |
| N/O contact   |  | g               | 7   |
| N/C contact   |  | g               | 5   |
| Degree of Protection  |  |                 | IP20  |
| Altitude  |  | m               | Max. 2000   |
| Protection against direct contact when actuated from front (EN 50274) |  |                 | Finger and back-of-hand proof   |
| Stripping length  |  | mm              | 10  |
| Terminal capacity main cable  |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)  |
| Flexible with ferrule   |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)  |
| Solid or stranded   |  | AWG             | 18 - 14   |
| Terminal screw  |  |                 | M3.5  |
| Tightening torque   |  | Nm              | 1.2   |
| Stripping length  |  | mm              | 10  |
| Push-in terminals   |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)  |
| flexible  |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)  |
| flexible with ferrules  |  | mm <sup>2</sup> | 1 x (0.75 - 1.5)<br>2 x (0.75 - 1.5)  |
| Solid or stranded   |  | AWG             | 18 - 14   |
| Terminal capacity control circuit cables                              |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)  |
| Flexible with ferrule   |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)  |
| Solid or stranded   |  | AWG             | 18 - 14   |
| Stripping length  |  | mm              | 10  |
| Terminal screw  |  |                 | M3.5  |
| Tightening torque   |  | Nm              | 1.2   |
| Push-in terminals   |  |                 |   |
| Solid   |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)  |
| Flexible  |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)  |
| Flexible with ferrule   |  | mm <sup>2</sup> | 1 x (0.75 - 1.5)<br>2 x (0.75 - 1.5)  |
| Solid or stranded   |  | AWG             | 18 - 14   |
| Tool  |  |                 |   |
| Main cable  |  |                 |   |
| Pozidriv screwdriver  |  | Size            | 2   |
| Standard screwdriver  |  | mm              | 0.8 x 5.5<br>1 x 6  |
| Control circuit cables  |  |                 |   |
| Pozidriv screwdriver  |  | Size            | 2   |
| Standard screwdriver  |  | mm              | 0.8 x 5.5<br>1 x 6  |

## Main conducting paths

|                                       |                  |      |                                  |
|---------------------------------------|------------------|------|----------------------------------|
| Rated impulse withstand voltage       | U <sub>imp</sub> | V AC | 8000                             |
| Overvoltage category/pollution degree |                  |      | III/3                            |
| Rated insulation voltage              | U <sub>i</sub>   | V AC | 690                              |
| Rated operational voltage             | U <sub>e</sub>   | V AC | 690                              |
| Safe isolation to EN 61140            |                  |      |                                  |
| between coil and contacts             |                  | V AC | 400                              |
| between the contacts                  |                  | V AC | 400                              |
| Making capacity (cos φ)               | Up to 690 V      | A    | 144<br>According to IEC/EN 60947 |
| Breaking capacity                     |                  |      |                                  |
| 220 V 230 V                           |                  | A    | 120                              |
| 380 V 400 V                           |                  | A    | 120                              |
| 500 V                                 |                  | A    | 100                              |
| 660 V 690 V                           |                  | A    | 70                               |
| Short-circuit rating                  |                  |      |                                  |
| Short-circuit protection maximum fuse |                  |      |                                  |
| Type "2" coordination                 |                  |      |                                  |
| 400 V                                 | gG/gL 500 V      | A    | 20                               |
| 690 V                                 | gG/gL 690 V      | A    | 20                               |
| Type "1" coordination                 |                  |      |                                  |
| 400 V                                 | gG/gL 500 V      | A    | 35                               |
| 690 V                                 | gG/gL 690 V      | A    | 25                               |

## AC

|   |                                  |     |   |
|---|----------------------------------|-----|---|
| AC-1  |                                  |     |   |
| Rated operational current                                 |                                  |     |   |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                                  |     |   |
| Open  |                                  |     |   |
| at 40 °C  | I <sub>th</sub> = I <sub>e</sub> | A   | 22  |
| at 50 °C  | I <sub>th</sub> = I <sub>e</sub> | A   | 21  |
| at 55 °C  | I <sub>th</sub> = I <sub>e</sub> | A   | 20.5  |
| at 60 °C  | I <sub>th</sub> = I <sub>e</sub> | A   | 20  |
| enclosed  | I <sub>th</sub>                  | A   | 18  |
| Conventional free air thermal current, 1 pole             |                                  |     |   |
| open  | I <sub>th</sub>                  | A   | 60  |
| enclosed  | I <sub>th</sub>                  | A   | 54  |
| Motor rating  | P                                | kWh |   |
| 220/230 V   | P                                | kW  | 8   |
| 240 V   | P                                | kW  | 9   |
| 380/400 V   | P                                | kW  | 14  |
| 415 V   | P                                | kW  | 15  |
| 440 V   | P                                | kW  | 16  |
| 500 V   | P                                | kW  | 18  |
| 690 V   | P                                | kW  | 24  |
| AC-3  |                                  |     |   |
| Rated operational current                                 |                                  |     |   |
| Open, 3-pole: 50 – 60 Hz                                  |                                  |     |   |
| Notes   |                                  |     | At maximum permissible ambient temperature (open.)<br>Also tested according to AC-3e. |
| 220 V 230 V   | I <sub>e</sub>                   | A   | 12  |
| 240 V   | I <sub>e</sub>                   | A   | 12  |
| 380 V 400 V   | I <sub>e</sub>                   | A   | 12  |
| 415 V   | I <sub>e</sub>                   | A   | 12  |
| 440V  | I <sub>e</sub>                   | A   | 12  |
| 500 V   | I <sub>e</sub>                   | A   | 10  |

|              |                |     |     |
|--------------|----------------|-----|-----|
| 660 V 690 V  | I <sub>e</sub> | A   | 7   |
| Motor rating | P              | kWh |     |
| 220 V 230 V  | P              | kW  | 3.5 |
| 240V         | P              | kW  | 4   |
| 380 V 400 V  | P              | kW  | 5.5 |
| 415 V        | P              | kW  | 7   |
| 440 V        | P              | kW  | 7.5 |
| 500 V        | P              | kW  | 7   |
| 660 V 690 V  | P              | kW  | 6.5 |

## DC

|                                 |                |   |    |
|---------------------------------|----------------|---|----|
| Rated operational current, open |                |   |    |
| DC-1                            |                |   |    |
| 60 V                            | I <sub>e</sub> | A | 22 |
| 110 V                           | I <sub>e</sub> | A | 22 |
| 220 V                           | I <sub>e</sub> | A | 6  |

## Current heat loss

|                                  |  |    |     |
|----------------------------------|--|----|-----|
| 3 pole, at I <sub>th</sub> (60°) |  | W  | 3   |
| Impedance per pole               |  | mΩ | 2.5 |

## Magnet systems

|  |          |                  |           |
|--|----------|------------------|-----------|
| Voltage tolerance  |          |                  |           |
| AC operated 50 Hz  | Pick-up  | x U <sub>c</sub> | 0.8 - 1.1 |
| AC operated 50/60 Hz   |          | x U <sub>c</sub> | 0.8 - 1.1 |
| Drop-out voltage AC operated   | Drop-out | x U <sub>c</sub> | 0.4 - 0.6 |
| Power consumption of the coil in a cold state and 1.0 x U <sub>S</sub>                     |          |                  |           |
| AC operated 50/60 Hz   | Pick-up  | VA               | 24        |
| AC operated 50/60 Hz   | Pick-up  | W                | 19        |
| AC operated 50/60 Hz   | Sealing  | VA               | 4         |
| AC operated 50/60 Hz   | Sealing  | W                | 1.4       |
| Duty factor  |          | % DF             | 100       |
| Changeover time at 100 % U <sub>S</sub> (recommended value)                                |          |                  |           |
| Main contacts  |          |                  |           |
| AC operated  |          |                  |           |
| Closing delay  |          | ms               | 15 - 21   |
| Opening delay  |          | ms               | 9 - 18    |
| Permissible residual current with actuation of A1 - A2 by the electronics (with 0 signal). |          | mA               | ≤ 1       |

## Rating data for approved types

|                                      |  |      |              |
|--------------------------------------|--|------|--------------|
| Switching capacity                   |  |      |              |
| General use                          |  | A    | 20           |
| Short Circuit Current Rating         |  | SCCR |              |
| Basic Rating                         |  |      |              |
| SCCR                                 |  | kA   | 5            |
| max. Fuse                            |  | A    | 45           |
| max. CB                              |  | A    | 60           |
| 480 V High Fault                     |  |      |              |
| SCCR (fuse)                          |  | kA   | 30           |
| max. Fuse                            |  | A    | 25 Class RK5 |
| 600 V High Fault                     |  |      |              |
| SCCR (fuse)                          |  | kA   | 30           |
| max. Fuse                            |  | A    | 25 Class RK5 |
| Special Purpose Ratings              |  |      |              |
| Electrical Discharge Lamps (Ballast) |  |      |              |
| 480V 60Hz 3phase, 277V 60Hz 1phase   |  | A    | 20           |
| 600V 60Hz 3phase, 347V 60Hz 1phase   |  | A    | 20           |
| Incandescent Lamps (Tungsten)        |  |      |              |
| 480V 60Hz 3phase, 277V 60Hz 1phase   |  | A    | 14           |

|                                    |    |     |
|------------------------------------|----|-----|
| 600V 60Hz 3phase, 347V 60Hz 1phase | A  | 14  |
| Resistance Air Heating             |    |     |
| 480V 60Hz 3phase, 277V 60Hz 1phase | A  | 20  |
| 600V 60Hz 3phase, 347V 60Hz 1phase | A  | 20  |
| Refrigeration Control (CSA only)   |    |     |
| LRA 480V 60Hz 3phase               | A  | 60  |
| FLA 480V 60Hz 3phase               | A  | 10  |
| LRA 600V 60Hz 3phase               | A  | 60  |
| FLA 600V 60Hz 3phase               | A  | 10  |
| Elevator Control                   |    |     |
| 600V 60Hz 3phase                   | HP | 5   |
| 600V 60Hz 3phase                   | A  | 6.1 |

## Design verification as per IEC/EN 61439

|  |                   |    |  |
|--|-------------------|----|--|
| Technical data for design verification   |                   |    |  |
| Rated operational current for specified heat dissipation   | I <sub>n</sub>    | A  | 22   |
| Heat dissipation per pole, current-dependent   | P <sub>vid</sub>  | W  | 1  |
| Equipment heat dissipation, current-dependent  | P <sub>vid</sub>  | W  | 3  |
| Static heat dissipation, non-current-dependent   | P <sub>vs</sub>   | W  | 1.4  |
| Heat dissipation capacity  | P <sub>diss</sub> | W  | 0  |
| Operating ambient temperature min.   |                   | °C | -25  |
| Operating ambient temperature max.   |                   | °C | 60   |
| IEC/EN 61439 design verification   |                   |    |  |
| 10.2 Strength of materials and parts   |                   |    |  |
| 10.2.2 Corrosion resistance  |                   |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                   |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                   |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                   |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                   |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |                   |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                   |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                   |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                   |    |  |
| 10.9.2 Power-frequency electric strength   |                   |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                   |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                   |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |                   |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 7.0

|   |   |           |
|---|---|-----------|
| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)   |   |           |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015]) |   |           |
| Rated control supply voltage Us at AC 50HZ  | V | 230 - 230 |
| Rated control supply voltage Us at AC 60HZ  | V | 240 - 240 |


|   |    |                  |
|---|----|------------------|
| Rated control supply voltage Us at DC                   | V  | 0 - 0            |
| Voltage type for actuating                              |    | AC               |
| Rated operation current Ie at AC-1, 400 V               | A  | 22               |
| Rated operation current Ie at AC-3, 400 V               | A  | 12               |
| Rated operation power at AC-3, 400 V                    | kW | 5.5              |
| Rated operation current Ie at AC-4, 400 V               | A  | 10               |
| Rated operation power at AC-4, 400 V                    | kW | 4.5              |
| Rated operation power NEMA                              | kW | 0                |
| Modular version   |    | No               |
| Number of auxiliary contacts as normally open contact   |    | 0                |
| Number of auxiliary contacts as normally closed contact |    | 0                |
| Type of electrical connection of main circuit           |    | Screw connection |
| Number of normally closed contacts as main contact      |    | 0                |
| Number of main contacts as normally open contact        |    | 4                |

Approvals

|                                      |  |  |
|--------------------------------------|--|--|
| Product Standards                    |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.                          |  | E29096   |
| UL Category Control No.              |  | NLDX   |
| CSA File No.                         |  | 012528   |
| CSA Class No.                        |  | 2411-03, 3211-04   |
| North America Certification          |  | UL listed, CSA certified   |
| Specially designed for North America |  | No   |

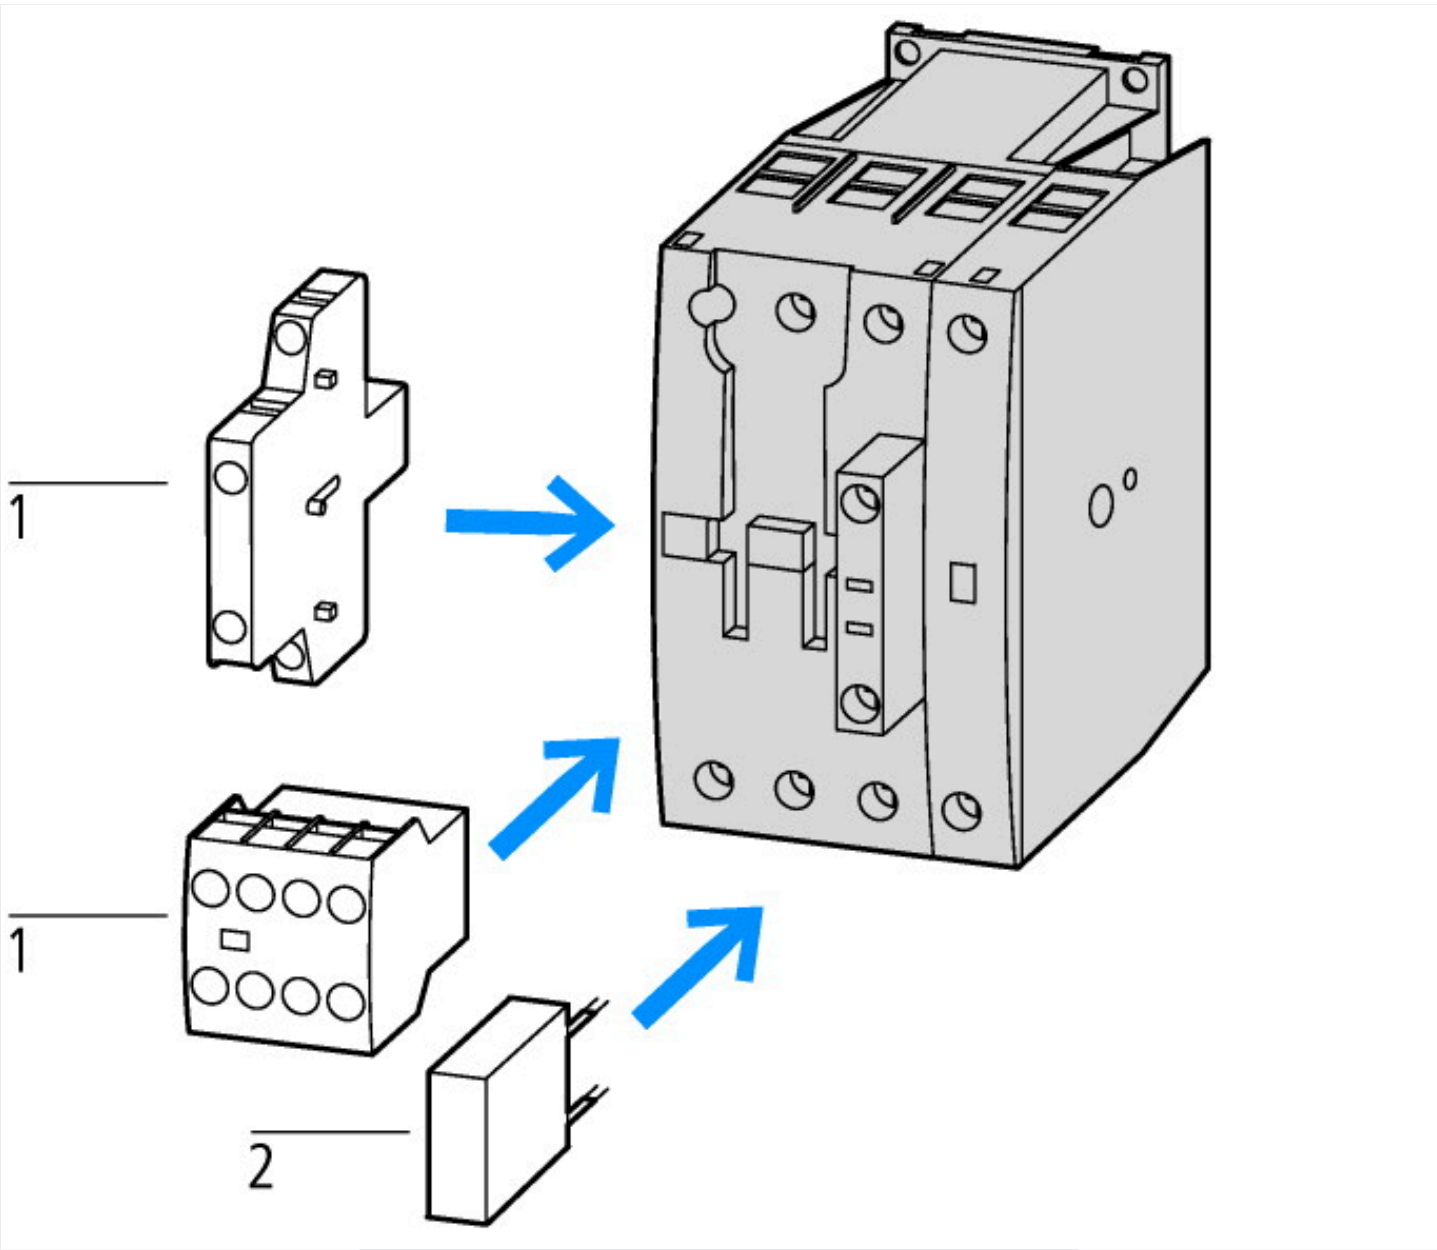

1: Auxiliary contact module  
2: Suppressor

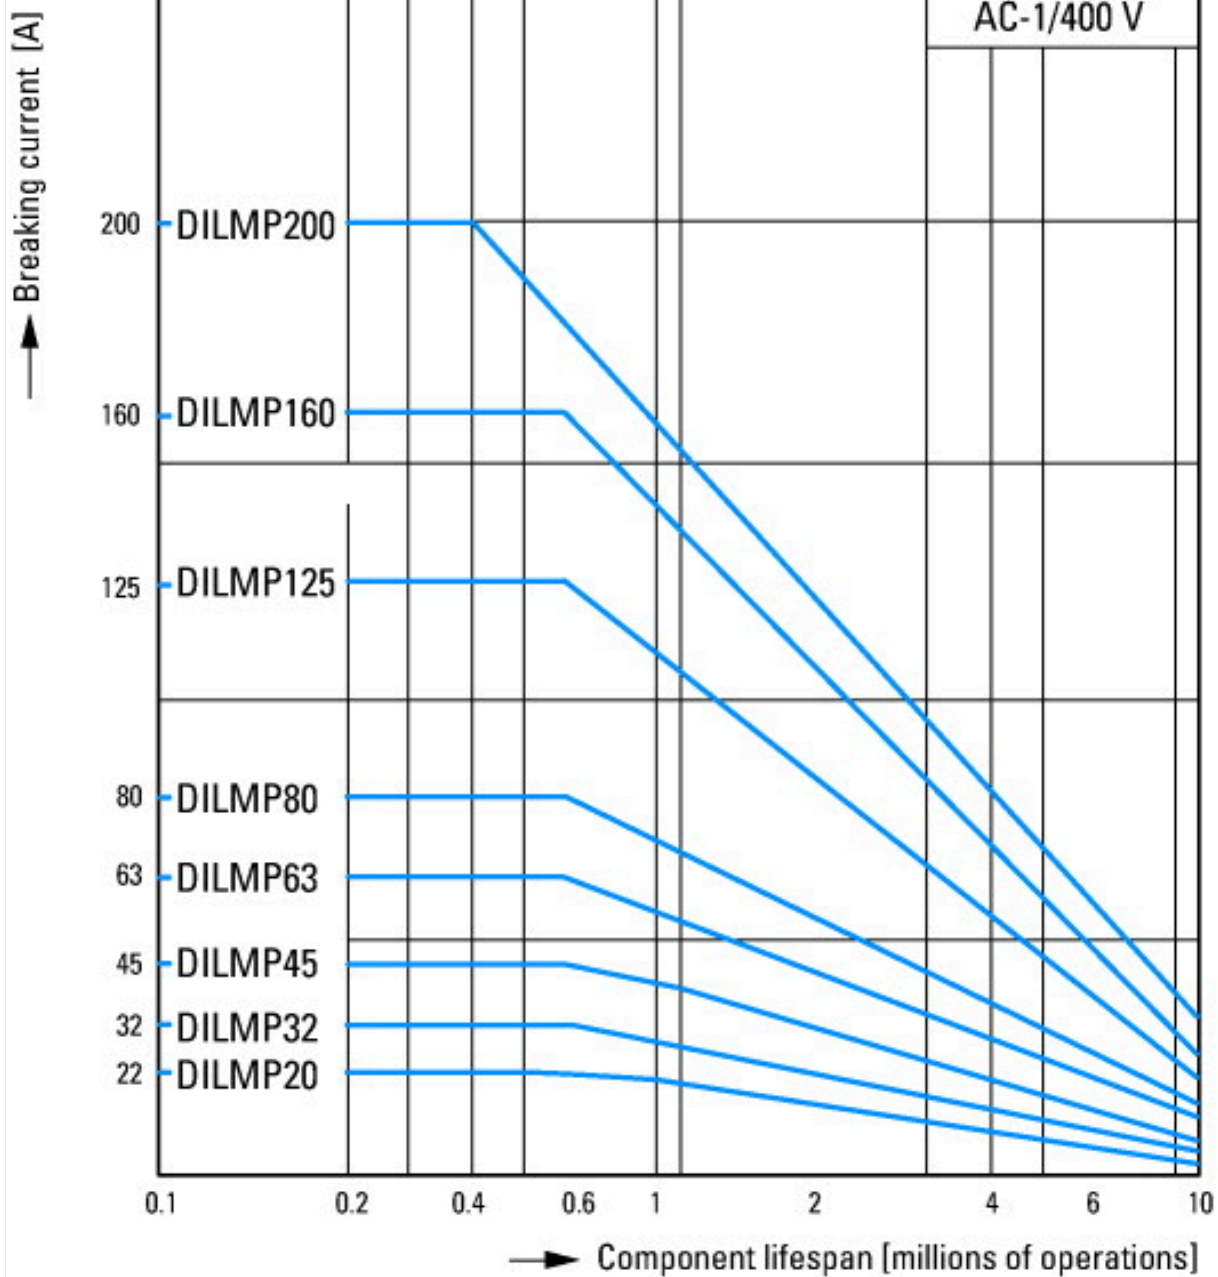

Switching conditions for 4 pole, non-motor loads

Operating characteristics

Non inductive and slightly inductive loads

Electrical characteristics

Switch on: 1 x rated operational current

Switch off: 1 x rated operational current

Utilization category


100 % AC-1

Typical examples of application


Electric heat



Dimensions

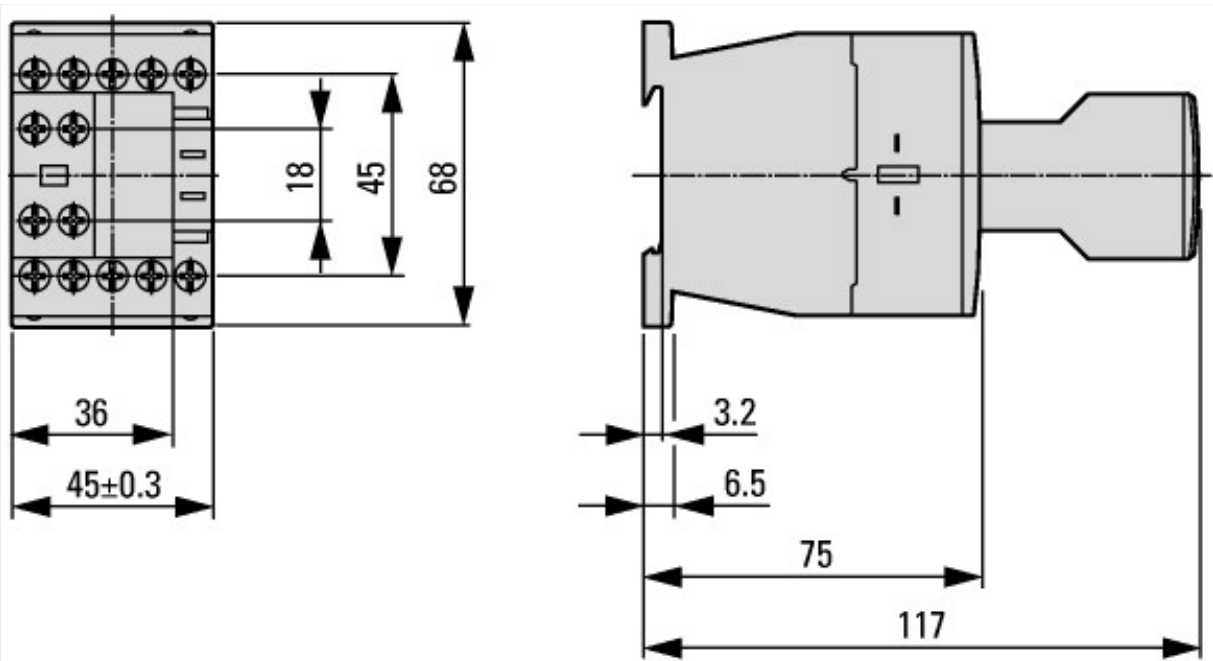

Contactor with auxiliary contact module

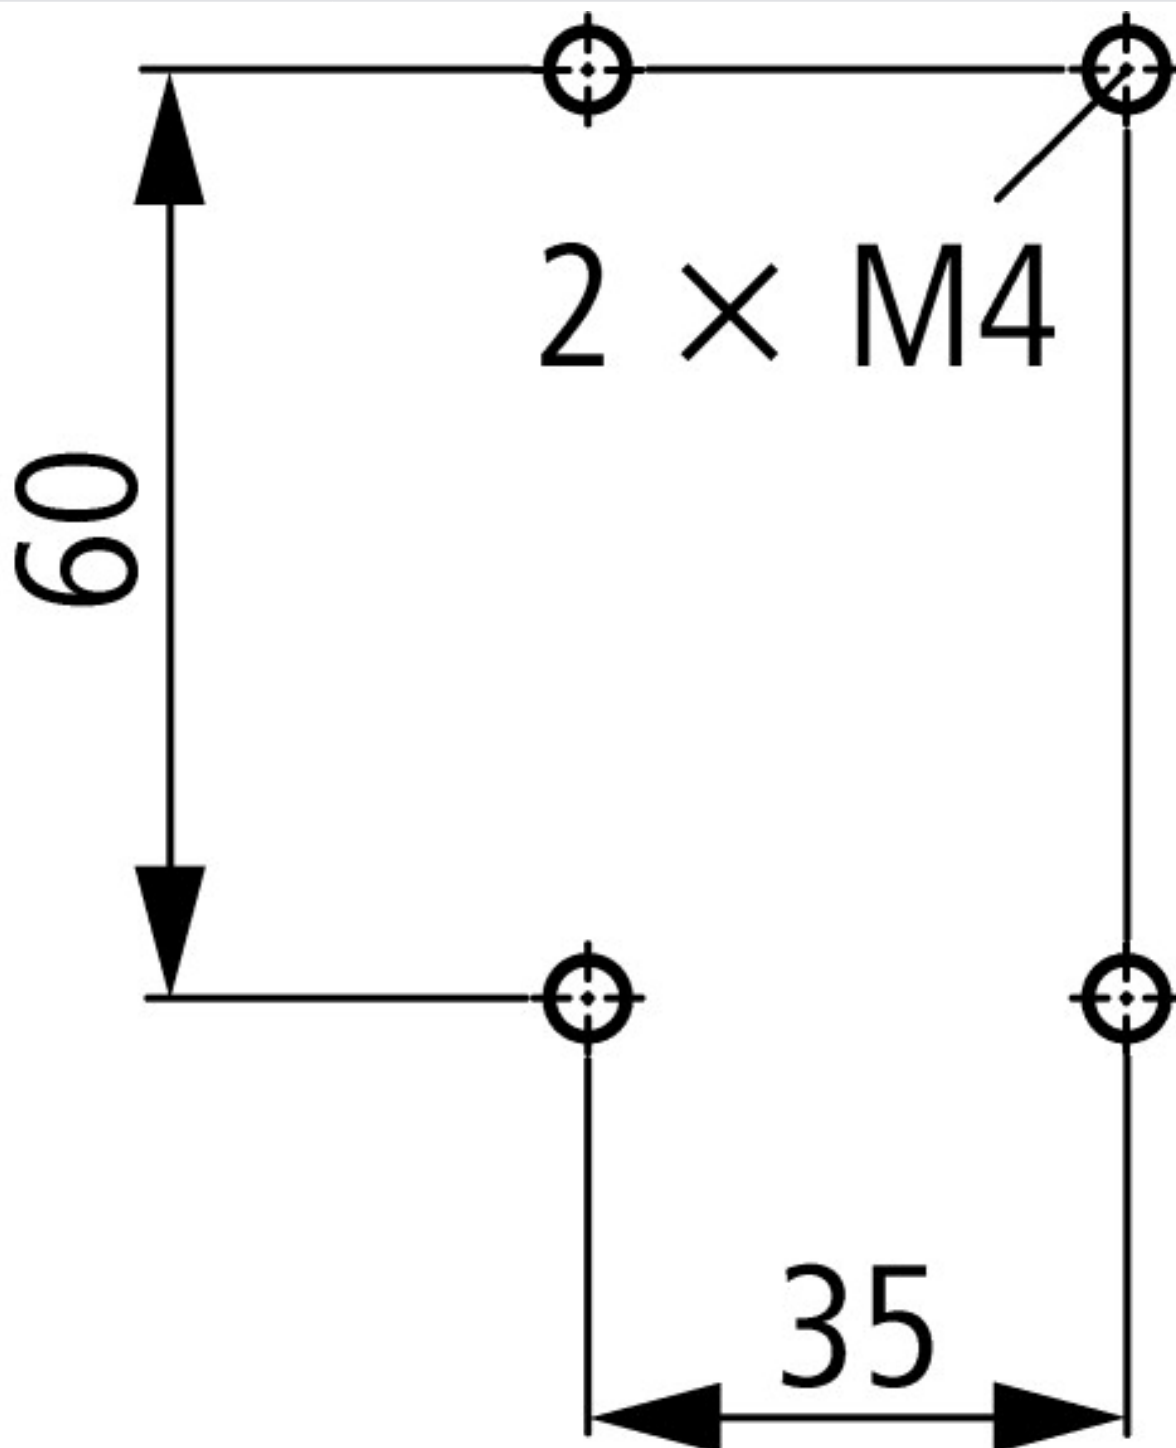

DILMP20

### Additional product information (links)

|  |   |
|--|---|
| Motor starters and "Special Purpose Ratings" for the North American market                     | <a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf</a> |
| Switchgear of Power Factor Correction Systems  | <a href="http://www.moeller.net/binary/ver_techpapers/ver934en.pdf">http://www.moeller.net/binary/ver_techpapers/ver934en.pdf</a>   |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver938en.pdf">http://www.moeller.net/binary/ver_techpapers/ver938en.pdf</a>   |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions   | <a href="http://www.moeller.net/binary/ver_techpapers/ver944en.pdf">http://www.moeller.net/binary/ver_techpapers/ver944en.pdf</a>   |
| Effect of the Cable Capacitance of Long Control Cables on the Actuation of Contactors          | <a href="http://www.moeller.net/binary/ver_techpapers/ver949en.pdf">http://www.moeller.net/binary/ver_techpapers/ver949en.pdf</a>   |
| Switchgear for Luminaires  | <a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a>   |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | <a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a>   |
| The Interaction of Contactors with PLCs  | <a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a>   |
| Busbar Component Adapters for modern Industrial control panels                                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a>   |