



Three-phase control isolating safety transformer, 2.5 kVA, Rated input voltage 50 – 950 ± 5 % V, Rated output voltage 18.5 – 1000 V

Part no. DTZ2,5(*/*)*
Catalog No. 914808
Alternate Catalog No. -

Delivery program

| | | |
|----------------------|-----|--------------------------------------|
| Product range | | Three-phase DTZ control transformers |
| Rated input voltage | V | 50 – 950 ± 5 % |
| Rated output voltage | V | 18.5 – 1000 |
| Rated power | kVA | 2.5 |
| Short-time rating | kVA | 5.5 |
| Cu factor 8,60 | | |

Notes

- Transformers with the rated output voltages ≤ 50 V can be used as safety transformers to IEC/EN 61558.
- UL/CSA only up to primary and secondary 600 V (incl. tapping).
- Enclosures IP65 on request.

When ordering, the type reference must include the following details:

DTZ0,1(*/*)*

1st wildcard ≙ Nominal input voltage

2nd wildcard ≙ Rated output voltage

3rd wildcard ≙ Configuration

Ordering example

- Desired part no. DTZ0,1
- Desired rated input voltage 200 V
- Desired rated output voltage 18.5 V
- Desired configuration Dy(n)5

The correct type reference is

DTZ0,1(200/18,5)DY(N)5

Additional tappings → 931897

Design verification as per IEC/EN 61439

| Technical data for design verification | | | |
|--|-------------------|----|--|
| Rated operational current for specified heat dissipation | I _n | A | 0 |
| Heat dissipation per pole, current-dependent | P _{vid} | W | 0 |
| Equipment heat dissipation, current-dependent | P _{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P _{vs} | W | 165 |
| Heat dissipation capacity | P _{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 40 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |

| | | |
|--|--|--|
| 10.3 Degree of protection of ASSEMBLIES | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | |
| 10.9.2 Power-frequency electric strength | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |


Technical data ETIM 7.0

| | | | |
|---|----|--|-------------|
| Low-voltage industrial components (EG000017) / Three-phase control transformer (EC002485) | | | |
| Electric engineering, automation, process control engineering / Transformer, converter, coil / Control transformer / Three-phase control transformer (ec1@ss10.0.1-27-03-13-01 [AAB619015]) | | | |
| Built as safety transformer | | | Yes |
| Built as isolating transformer | | | Yes |
| Built as energy saving transformer | | | No |
| Primary voltage 1 | V | | 50 - 950 |
| Primary voltage 2 | V | | 50 - 950 |
| Primary voltage 3 | V | | 50 - 950 |
| Primary voltage 4 | V | | 50 - 950 |
| Primary voltage 5 | V | | 50 - 950 |
| Primary voltage 6 | V | | 50 - 950 |
| Primary voltage 7 | V | | 0 - 0 |
| Primary voltage 8 | V | | 0 - 0 |
| Primary voltage 9 | V | | 0 - 0 |
| Primary voltage 10 | V | | 0 - 0 |
| Secondary voltage 1 | V | | 18.5 - 1000 |
| Secondary voltage 2 | V | | 18.5 - 1000 |
| Secondary voltage 3 | V | | 18.5 - 1000 |
| Secondary voltage 4 | V | | 18.5 - 1000 |
| Secondary voltage 5 | V | | 18.5 - 1000 |
| Secondary voltage 6 | V | | 18.5 - 1000 |
| Secondary voltage 7 | V | | 0 - 0 |
| Secondary voltage 8 | V | | 0 - 0 |
| Secondary voltage 9 | V | | 0 - 0 |
| Secondary voltage 10 | V | | 0 - 0 |
| Wiring system | | | Other |
| Rated power | VA | | 2500 |
| Type of insulation material acc. IEC 85 | | | B |
| Short-circuit-proof | | | No |
| Relative short circuit voltage | % | | 2.5 |
| Conductor material | | | Copper |
| Width | mm | | 265 |
| Height | mm | | 299 |
| Depth | mm | | 132 |
| Degree of protection (IP) | | | IP00 |
| Degree of protection (NEMA) | | | Other |

Approvals

| | |
|--------------------------------------|---|
| Product Standards | UL 506; UL5085-1; UL 5085-2; CSA-C22.2 No. 66; CSA-C22.2 No. 66.1-06; CSA-C22.2 No. 66.2-06; IEC/EN 61558-2-2; CE marking |
| UL File No. | E167225 |
| UL Category Control No. | XPTQ2, XPTQ8 |
| CSA File No. | UL report applies to both US and Canada |
| CSA Class No. | - |
| North America Certification | UL recognized, certified by UL for use in Canada |
| Specially designed for North America | No |
| Suitable for | Branch circuits |
| Max. Voltage Rating | 600 V AC |
| Degree of Protection | IEC: IP00, UL/CSA Type: - |

Dimensions

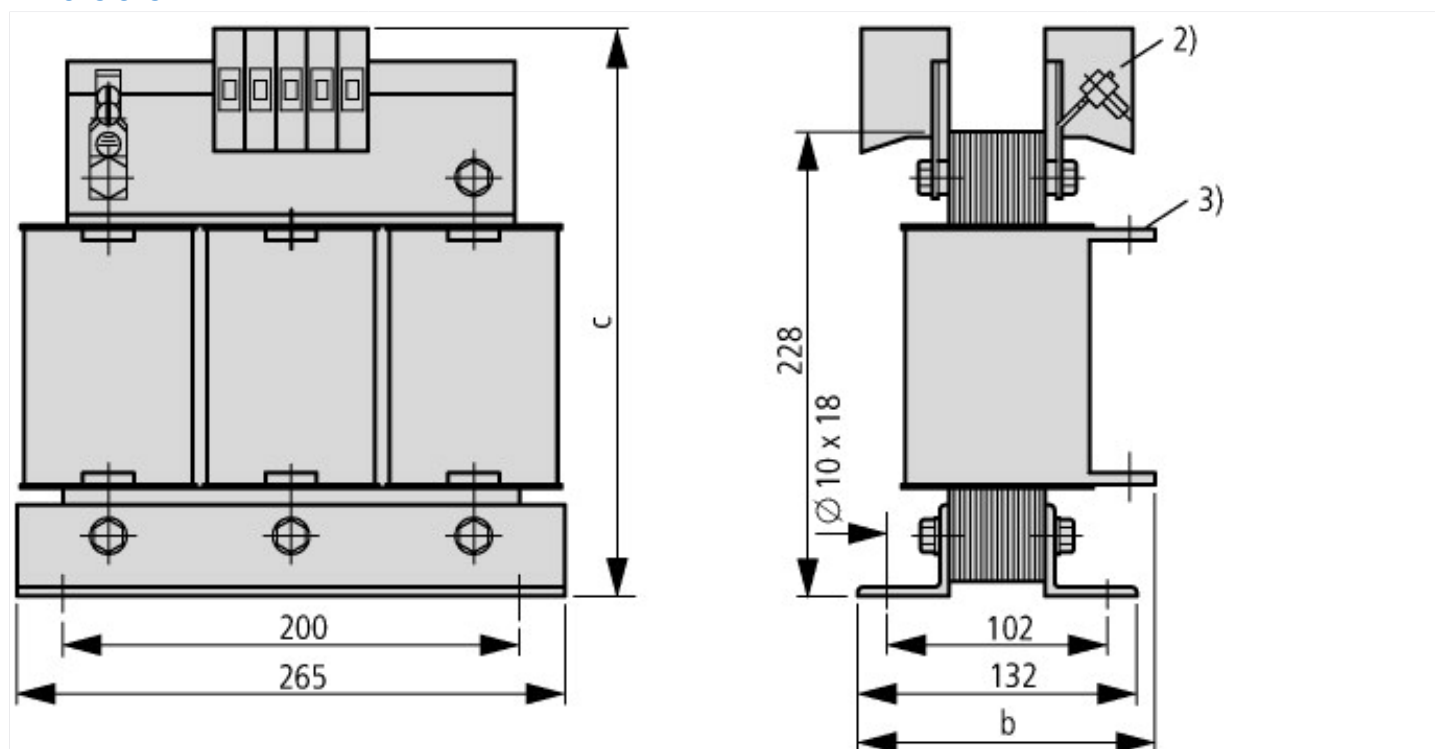

| | b | c |
|-----------|-----|-----|
| 18.5 V | 132 | 299 |
| 24 V | 132 | 299 |
| 42 V | 132 | 299 |
| 110 V | 152 | 264 |
| 230-690 V | 132 | 253 |

- ① The higher rated operating voltage applies
- ② Terminals ≤ 25 A
- ③ Connection lugs > 63 A

Assets (links)

Declaration of CE Conformity
00003099