




Base module, for signal tower, asi connection

Part no. **SL-B-ASI**
 Catalog No. **222174**
 Alternate Catalog No. **SL-B-ASI**
 EL-Nummer **4355547**
 (Norway)

Delivery program

| | | |
|----------------------------|--|--|
| Product range | | SL signal towers |
| Single unit/Complete unit | | Element |
| Connection technique | | Screw terminal on printed circuit boardconnection to AS-Interface |
| Description | | With cover |
| Colour | | Black |
| | |  |
| Connection to SmartWire-DT | | no |

Notes

Base module (printed circuit board in base enclosure with 3 outputs):

- Power supply completely from AS-Interface (max. 250 mA) with 2-way screw terminal
- Combination of 3 surface mounting modules with various functions (continuous-, flashing-, strobe light and acoustic indicator)
- Status LEDs
- Order surface mounting modules separately

Technical data

General

| | | |
|----------------------------------|----|---|
| Connection technique | | Screw terminal on printed circuit boardconnection to AS-Interface |
| Addressing | | through AS interface line connection |
| Maximum total current | mA | ≤ 250 |
| Power supply | | From AS interface line only |
| Ambient temperature | | -25 - 55 |
| Status LEDs on the circuit-board | | Status. Output Q0/function module position 1: green Status. Output Q1/function module position 2: green Status. Output Q2/function module position 3: green AS interface power line: green AS interface error, AS interface master failure: red |
| Profile | | S-9.A.E |


Design verification as per IEC/EN 61439

| | | |
|--|----|-----|
| Technical data for design verification | | |
| Operating ambient temperature min. | °C | -25 |
| Operating ambient temperature max. | °C | 55 |

Technical data ETIM 5.0

| | | |
|---|--|------------------|
| Low-voltage industrial components (EG000017) / Connection module for signal tower (EC001152) | | |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Signal column element, connection module (ecl@ss8-27-37-12-32 [AKF050010]) | | |
| Connection type auxiliary circuit | | Screw connection |
| Tube mounting possible | | Yes |
| Bracket mounting possible | | Yes |
| Floor mounting possible | | Yes |
| Colour | | Black |
| Suitable for AS interface | | Yes |

Dimensions

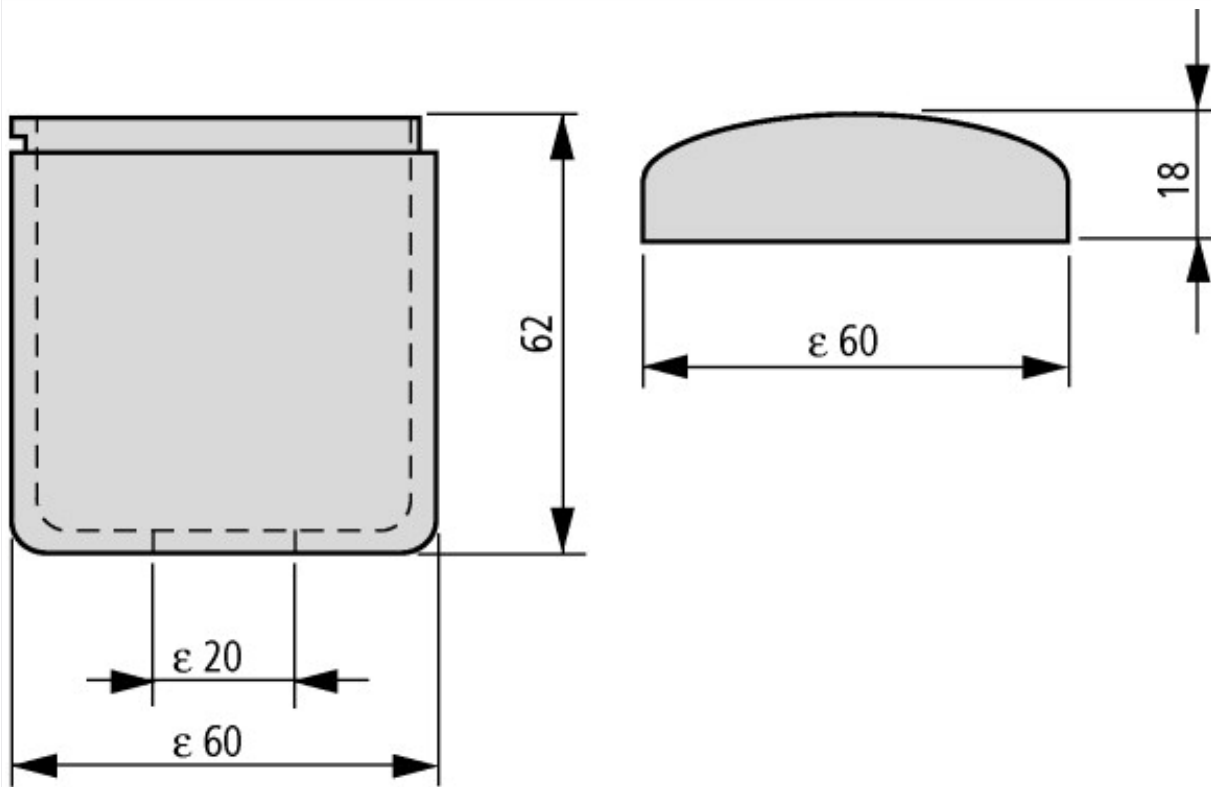

Base module with cover

Additional product information (links)

IL04716024Z (AWA1160-1685) Pillar lamps

IL04716024Z (AWA1160-1685) Pillar lamps

https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716024Z2018_05.pdf