



DOL starter, 380 V 400 V 415 V: 0.37 kW, I_q= 100 kA, I_r= 0.3 - 1.2 A, 24 V DC, DC voltage

Part no. MSC-DE-1,2-M7(24VDC)
Catalog No. 121736
Alternate Catalog No. XTSE1P2B007BTDNL
EL-Nummer (Norway) 4315115

Delivery program

| | | | | |
|---|----------------|----|--|--|
| Basic function | | | | DOL starters (complete devices) |
| Basic device | | | | MSC |
| | | | | |
| Notes | | | | Also suitable for motors with efficiency class IE3. IE3-ready devices are identified by the logo on their packaging. |
| Connection to SmartWire-DT | | | | no |
| Motor ratings | | | | |
| Motor rating | | | | |
| AC-3 | | | | |
| 380 V 400 V 415 V | P | kW | | 0.37 |
| Rated operational current | | | | |
| AC-3 | | | | |
| 380 V 400 V 415 V | I _e | A | | 1.1 |
| Rated short-circuit current 380 - 415 V | I _q | kA | | 100 |
| Setting range | | | | |
| Setting range of overload releases | I _r | A | | 0.3 - 1.2 |
| | | | | |
| Coordination | | | | Type of coordination "1" |
| Contact sequence | | | | |
| Actuating voltage | | | | 24 V DC |
| | | | | DC voltage |
| Motor-protective circuit-breakers PKE12/XTU-1,2 | | | | |
| Contactor DILM7-10(...) | | | | |
| DOL starter wiring set Mechanical connection element and electrical electric contact module PKZM0-XDM12 | | | | |

Notes

The DOL starters (complete units) consist of a PKE motor protective circuit breaker and a DILM contactor.

With the adapter-less top-hat rail mounting of starters up to 15 A, only the motor protective circuit breaker on the top-hat rail requires an adapter.

The contactors are provided with mechanical support via a mechanical connection element.

Control wire guide with max. 6 conductors up to 2.5 mm external diameter or 4 conductors up to 3.5 mm external diameter.

The connection of the main circuit between PKE and contactor is established with electrical contact modules.

When using DILA-XHIT... auxiliary contacts with MSC-DE-... DOL starters, the plug-in electrical connectors can be removed without removing the front-mounted auxiliary contact.


Cannot be combined with NHI-E...PKZ0-C.

The MSC-DEA... DOL starters are prepared for communication via SmartWire-DT. For this, the PKE-SWD-32 communication module must be added.

| Motor output/rated motor current | Rated motor current | | |
|----------------------------------|------------------------|------------------------|-----------------------|
| Motor rating | AC-3 | | |
| | 220 V | 380 V | 415 V |
| | 230 V | 400 V | |
| | 240 V | | |
| | $I_q = 100 \text{ kA}$ | $I_q = 100 \text{ kA}$ | $I_q = 50 \text{ kA}$ |
| P | l | l | l |
| kW | A | A | A |
| 0.06 | 0.37 | - | - |
| 0.09 | 0.54 | 0.31 | 0.31 |
| 0.12 | 0.72 | 0.41 | 0.41 |
| 0.18 | 1.04 | 0.6 | 0.6 |
| 0.25 | - | 0.8 | 0.8 |
| 0.37 | - | 1.1 | 1.1 |

Technical data

General

| | | |
|---------------------|---|---|
| Standards | | IEC/EN 60947-4-1, VDE 0660 |
| Mounting position | |  |
| Altitude | m | Max. 2000 |
| Ambient temperature | | -25 - +55 |

Main conducting paths

| | | | |
|---------------------------------------|-----------|------|--|
| Rated impulse withstand voltage | U_{imp} | V AC | 6000 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated operational voltage | U_e | V | 230 - 415 |
| Rated operational current | | | |
| Open, 3-pole: 50 – 60 Hz | | | |
| 380 V 400 V | I_e | A | 1.2 |
| AC-4 cycle operation | | | |
| Minimum current flow times | | ms | 500 (Class 5) 700 (Class 10) 900 (Class 15) 1000 (Class 20) |
| Minimum cut-out periods | | ms | 500 |
| Note | | ms | In AC-4 cycle operation, going below the minimum current flow time can cause overheating of the load (motor). For all combinations with an SWD activation, you need not adhere to the minimum current flow times and minimum cut-out periods. |

Additional technical data

| | | | |
|---|--|---|---|
| Motor protective circuit breaker PKZM0, PKE | | | PKZM0 motor-protective circuit-breakers, see motor-protective circuit-breakers/ PKZM0 product group DILM contactors, see contactor product group DILET timing relay, ETR, see contactors, electronic timing relays product group |
| DILM contactors | | | |
| Current heat loss | | | |
| Current heat loss at I_e to AC-3/400 V | | W | 0.6 |

Power consumption

| | | | |
|-------------|---------|---|-----|
| DC operated | Sealing | W | 2.6 |
|-------------|---------|---|-----|

Rating data for approved types

| | | | |
|------------------------------|--|------|---------------|
| Short Circuit Current Rating | | SCCR | |
| 600 V High Fault | | | |
| SCCR (fuse) | | kA | 100 |
| max. Fuse | | A | 15 Class J/CC |

Design verification as per IEC/EN 61439


| | | | |
|--|------------|----|--|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 1.2 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 0.2 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 0.6 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 2.6 |
| Heat dissipation capacity | P_{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 55 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 7.0

| | | | |
|--|--|----|----------------|
| Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037) | | | |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013]) | | | |
| Kind of motor starter | | | Direct starter |
| With short-circuit release | | | Yes |
| Rated control supply voltage U_s at AC 50HZ | | V | 0 - 0 |
| Rated control supply voltage U_s at AC 60HZ | | V | 0 - 0 |
| Rated control supply voltage U_s at DC | | V | 24 - 24 |
| Voltage type for actuating | | | DC |
| Rated operation power at AC-3, 230 V, 3-phase | | kW | 0.18 |

| | | |
|--|----|------------------|
| Rated operation power at AC-3, 400 V | kW | 0.37 |
| Rated power, 460 V, 60 Hz, 3-phase | kW | 0 |
| Rated power, 575 V, 60 Hz, 3-phase | kW | 0 |
| Rated operation current I _e | A | 1.1 |
| Rated operation current at AC-3, 400 V | A | 1.2 |
| Overload release current setting | A | 0.3 - 1.2 |
| Rated conditional short-circuit current, type 1, 480 Y/277 V | A | 0 |
| Rated conditional short-circuit current, type 1, 600 Y/347 V | A | 0 |
| Rated conditional short-circuit current, type 2, 230 V | A | 0 |
| Rated conditional short-circuit current, type 2, 400 V | A | 0 |
| Number of auxiliary contacts as normally open contact | | 1 |
| Number of auxiliary contacts as normally closed contact | | 0 |
| Ambient temperature, upper operating limit | °C | 60 |
| Temperature compensated overload protection | | Yes |
| Release class | | Adjustable |
| Type of electrical connection of main circuit | | Screw connection |
| Type of electrical connection for auxiliary- and control current circuit | | Screw connection |
| Rail mounting possible | | Yes |
| With transformer | | No |
| Number of command positions | | 0 |
| Suitable for emergency stop | | No |
| Coordination class according to IEC 60947-4-3 | | Class 1 |
| Number of indicator lights | | 0 |
| External reset possible | | No |
| With fuse | | No |
| Degree of protection (IP) | | IP20 |
| Degree of protection (NEMA) | | Other |
| Supporting protocol for TCP/IP | | No |
| Supporting protocol for PROFIBUS | | No |
| Supporting protocol for CAN | | No |
| Supporting protocol for INTERBUS | | No |
| Supporting protocol for ASI | | No |
| Supporting protocol for MODBUS | | No |
| Supporting protocol for Data-Highway | | No |
| Supporting protocol for DeviceNet | | No |
| Supporting protocol for SUCONET | | No |
| Supporting protocol for LON | | No |
| Supporting protocol for PROFINET IO | | No |
| Supporting protocol for PROFINET CBA | | No |
| Supporting protocol for SERCOS | | No |
| Supporting protocol for Foundation Fieldbus | | No |
| Supporting protocol for EtherNet/IP | | No |
| Supporting protocol for AS-Interface Safety at Work | | No |
| Supporting protocol for DeviceNet Safety | | No |
| Supporting protocol for INTERBUS-Safety | | No |
| Supporting protocol for PROFIsafe | | No |
| Supporting protocol for SafetyBUS p | | No |
| Supporting protocol for other bus systems | | No |
| Width | mm | 45 |
| Height | mm | 198 |
| Depth | mm | 102 |

Dimensions

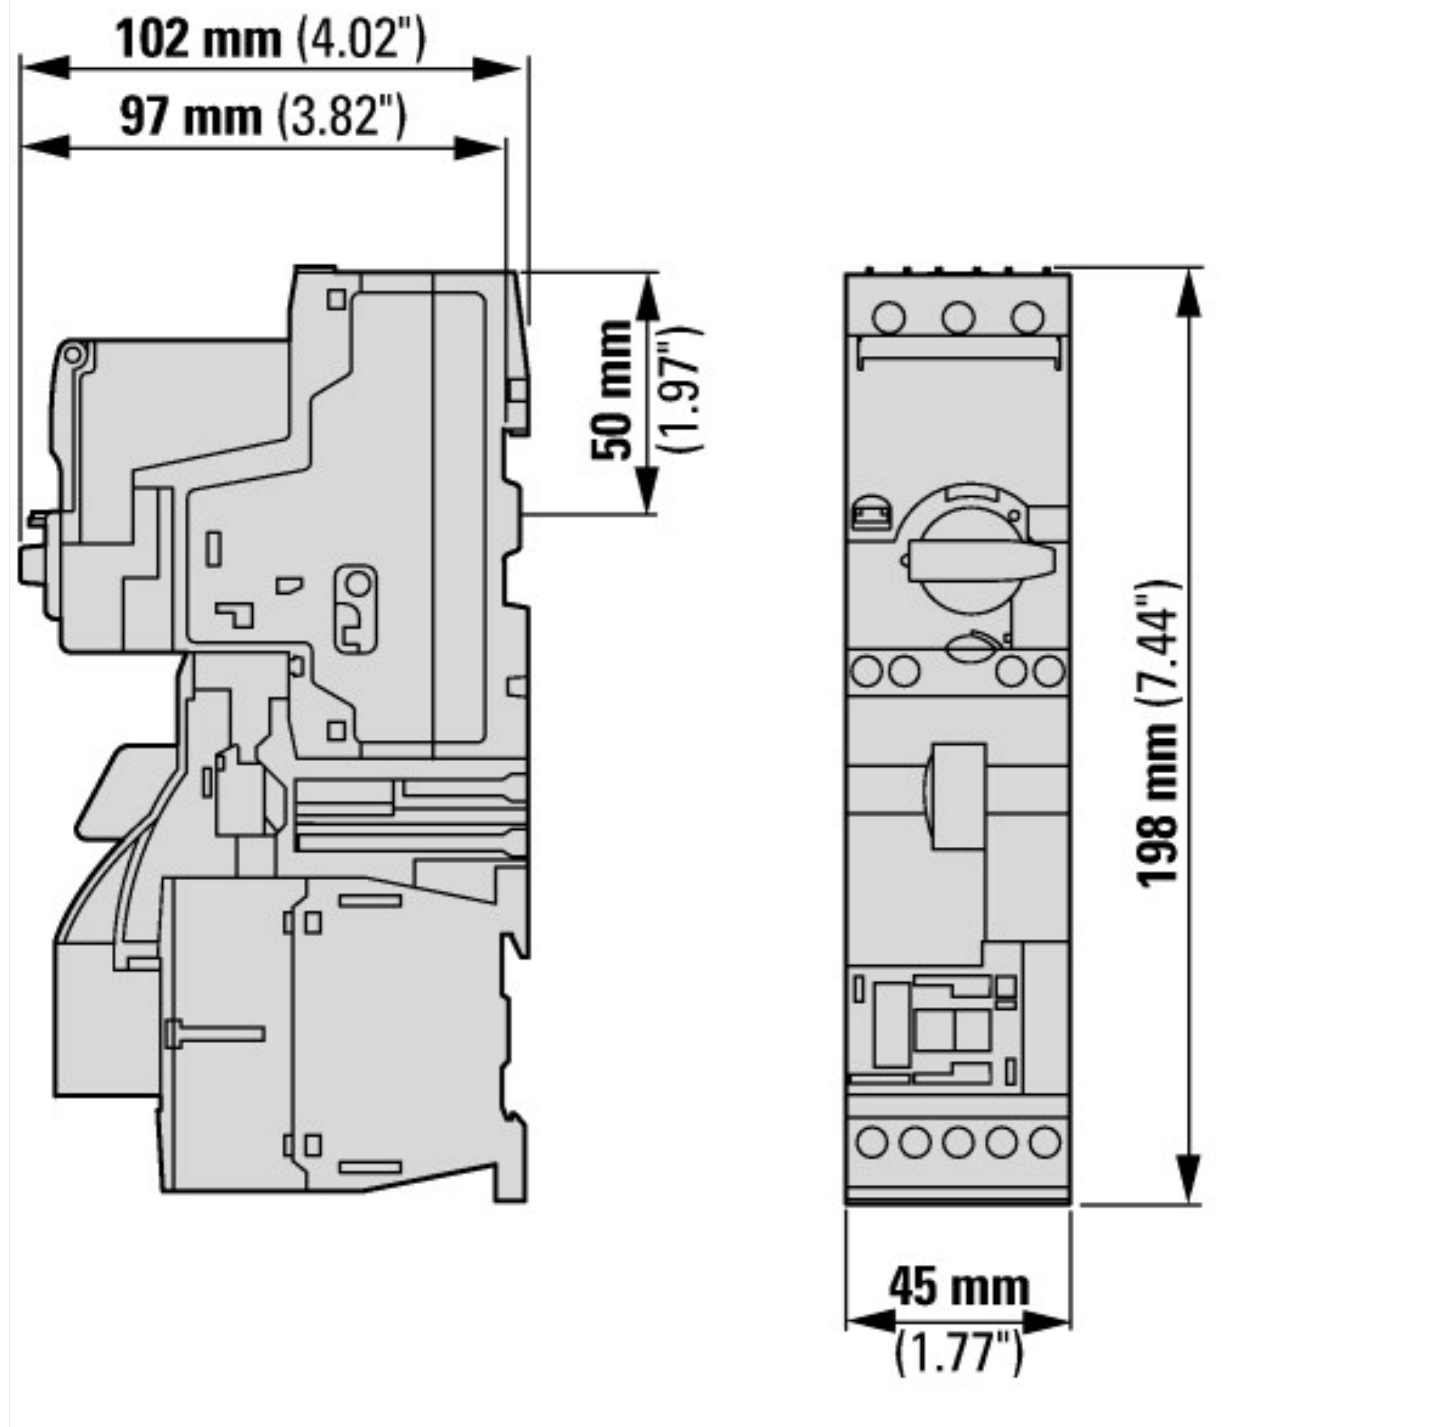

Assets (links)

Declaration of CE Conformity

00002889

Instruction Leaflets

IL034038ZU2018_06

Additional product information (links)

IL034038ZU (AWA1210-2246) Direct-on-line starter up to 15 A

IL034038ZU (AWA1210-2246) Direct-on-line starter up to 15 A ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL034038ZU2018_06.pdf

Moeller_Online Selections Aids <http://www.moeller.net/en/support/slider/index.jsp>