



Position switch, Rounded plunger, Basic device, expandable, 2 NC, Cage Clamp, Yellow, Insulated material, -25 - +70 °C, EN 50047 Form B

Part no. LS-02A
Catalog No. 116702
Alternate Catalog No. LS-02A
EL-Nummer (Norway) 4315225

Delivery program

| | | |
|--|----|---|
| Basic function | | Position switches Safety position switches |
| Part group reference | | LS(M)-... |
| Product range | | Rounded plunger |
| Degree of Protection | | IP66, IP67 |
| Features | | Basic device, expandable |
| Ambient temperature | °C | -25 - +70 |
| Design | | EN 50047 Form B |
| Contacts | | |
| N/C = Normally closed | | 2 NC |
| Notes | | = safety function, by positive opening to IEC/EN 60947-5-1 |
| Contact sequence | | |
| Contact travel = Contact closed = Contact open | | <p>Zw (11-12) = 3.3 mm Zw (21-22) = 5.3 mm</p> |
| Positive opening (ZW) | | yes |
| Colour | | |
| Enclosure covers | | Yellow |
| Enclosure covers | | |
| Housing | | Insulated material |
| Connection type | | Cage Clamp |
| Notes | | Cage-Clamp is a registered trademark of Wago Kontakttechnik, 32432 Minden, Germany. Accessories for the Cage-Clamp terminals from Wago: power comb, gray, Wago Article No. 264-402 |

Technical data

| | | |
|----------------------|-----------------|--|
| General | | |
| Standards | | IEC/EN 60947 |
| Climatic proofing | | Damp heat, constant, to IEC 60068-2-78; damp heat, cyclical, to IEC 60068-2-30 |
| Ambient temperature | °C | -25 - +70 |
| Mounting position | | As required |
| Degree of Protection | | IP66, IP67 |
| Terminal capacities | mm ² | |
| Solid | mm ² | 1 x (0.5 - 2.5) |

| | | | |
|--|------------------|-------------------|--|
| Flexible with ferrule | | mm ² | 1 x (0.5 - 1.5) |
| Repetition accuracy | | mm | 0.15 |
| Contacts/switching capacity | | | |
| Rated impulse withstand voltage | U _{imp} | V AC | 4000 |
| Rated insulation voltage | U _i | V | 400 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated operational current | I _e | A | |
| AC-15 | | | |
| 24 V | I _e | A | 6 |
| 220 V 230 V 240 V | I _e | A | 6 |
| 380 V 400 V 415 V | I _e | A | 4 |
| DC-13 | | | |
| 24 V | I _e | A | 3 |
| 110 V | I _e | A | 0.6 |
| 220 V | I _e | A | 0.3 |
| Control circuit reliability | | | |
| at 24 V DC/5 mA | H _F | Fault probability | < 10 ⁻⁷ , < 1 fault in 10 ⁷ operations |
| at 5 V DC/1 mA | H _F | Fault probability | < 5 x 10 ⁻⁶ , < 1 failure at 5 x 10 ⁶ operations |
| Supply frequency | | Hz | max. 400 |
| Short-circuit rating to IEC/EN 60947-5-1 | | | |
| max. fuse | | A gG/gL | 6 |
| Rated conditional short-circuit current | | kA | 1 |

Mechanical variables

| | | | |
|--|--------------|-------------------|--------|
| Lifespan, mechanical | Operations | x 10 ⁶ | 8 |
| Contact temperature of roller head | | °C | ≤ 100 |
| Mechanical shock resistance (half-sinusoidal shock, 20 ms) | | | |
| Standard-action contact | | g | 25 |
| Operating frequency | Operations/h | | ≤ 6000 |

Actuation

| | | | |
|--|--|-----|-----------------------------------|
| Mechanical | | | |
| Actuating force at beginning/end of stroke | | N | 1.0/8.0 |
| Actuating torque of rotary drives | | Nm | 0.2 |
| Max. operating speed with DIN cam | | m/s | 1/0.5 |
| Notes | | | for angle of actuation α = 0°/30° |

Design verification as per IEC/EN 61439

| | | | |
|--|-------------------|----|--|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I _n | A | 6 |
| Heat dissipation per pole, current-dependent | P _{vid} | W | 0.17 |
| Equipment heat dissipation, current-dependent | P _{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P _{vs} | W | 0 |
| Heat dissipation capacity | P _{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 70 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |

| | | | |
|--|--|--|--|
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |


Technical data ETIM 7.0

| | | | |
|---|----|--|--------------------|
| Sensors (EG000026) / End switch (EC000030) | | | |
| Electric engineering, automation, process control engineering / Binary sensor technology, safety-related sensor technology / Position switch / Position switch (Type 1) (ecI@ss10.0.1-27-27-06-01 [AGZ382015]) | | | |
| Width sensor | mm | | 31 |
| Diameter sensor | mm | | 0 |
| Height of sensor | mm | | 61 |
| Length of sensor | mm | | 33.5 |
| Rated operation current I _e at AC-15, 24 V | A | | 6 |
| Rated operation current I _e at AC-15, 125 V | A | | 6 |
| Rated operation current I _e at AC-15, 230 V | A | | 6 |
| Rated operation current I _e at DC-13, 24 V | A | | 3 |
| Rated operation current I _e at DC-13, 125 V | A | | 0.8 |
| Rated operation current I _e at DC-13, 230 V | A | | 0.3 |
| Switching function | | | Slow-action switch |
| Switching function latching | | | No |
| Output electronic | | | No |
| Forced opening | | | Yes |
| Number of safety auxiliary contacts | | | 2 |
| Number of contacts as normally closed contact | | | 2 |
| Number of contacts as normally open contact | | | 0 |
| Number of contacts as change-over contact | | | 0 |
| Type of interface | | | None |
| Type of interface for safety communication | | | None |
| Construction type housing | | | Cuboid |
| Material housing | | | Plastic |
| Coating housing | | | Other |
| Type of control element | | | Plunger |
| Alignment of the control element | | | Other |
| Type of electric connection | | | Other |
| With status indication | | | No |
| Suitable for safety functions | | | Yes |
| Explosion safety category for gas | | | None |
| Explosion safety category for dust | | | None |
| Ambient temperature during operating | °C | | 25 - 70 |
| Degree of protection (IP) | | | IP67 |
| Degree of protection (NEMA) | | | 4X |


Approvals

| | | |
|-----------------------------|--|---|
| Product Standards | | IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14; CE marking |
| UL File No. | | E29184 |
| UL Category Control No. | | NKCR |
| CSA File No. | | 12528 |
| CSA Class No. | | 3211-03 |
| North America Certification | | UL listed, CSA certified |
| Degree of Protection | | IEC: IP66, 67, UL/CSA Type 3R, 4X (indoor use only), 12, 13 |

Dimensions

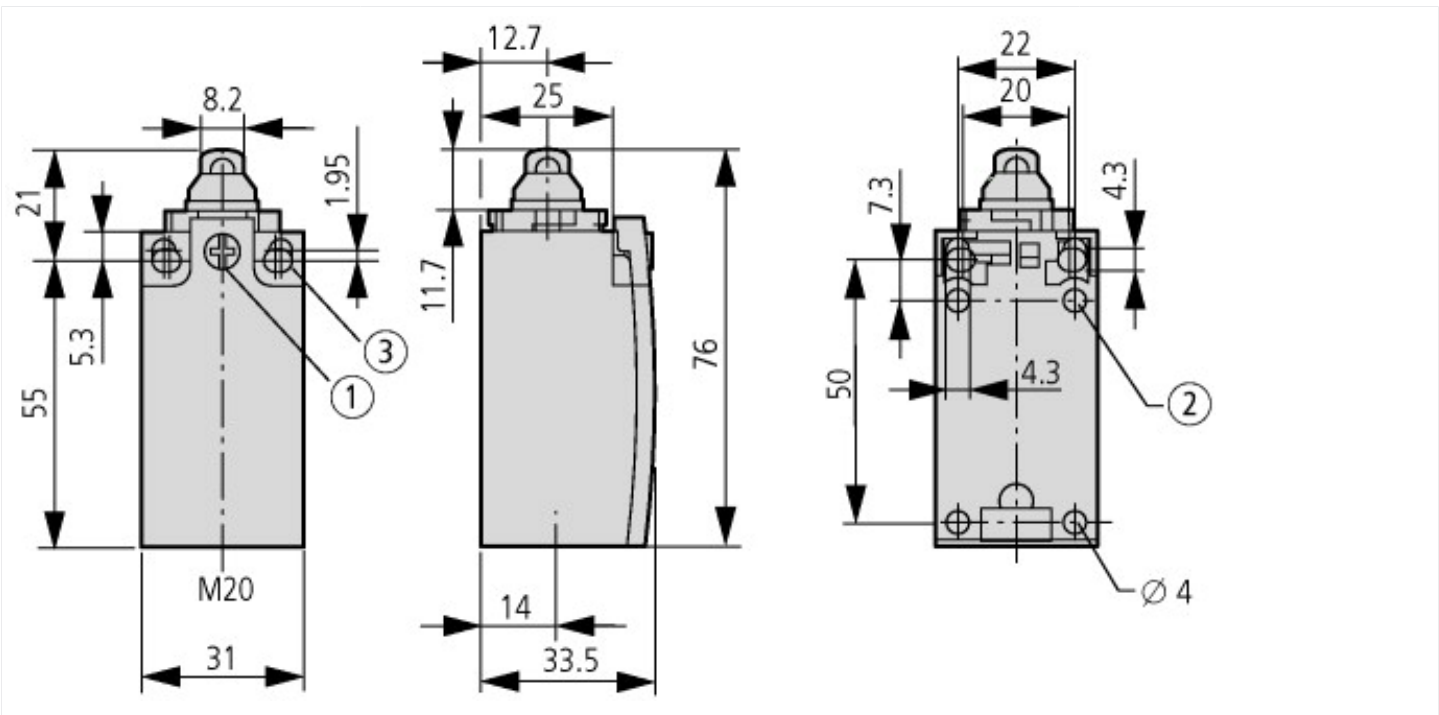

- ① Tightening torque of cover screws: 0.8 Nm \pm 0.2 Nm
 - ② only with LS (insulated version)
 - ③ Fixing screws 2 x M4 \geq 30
- M_A = 1.5 Nm

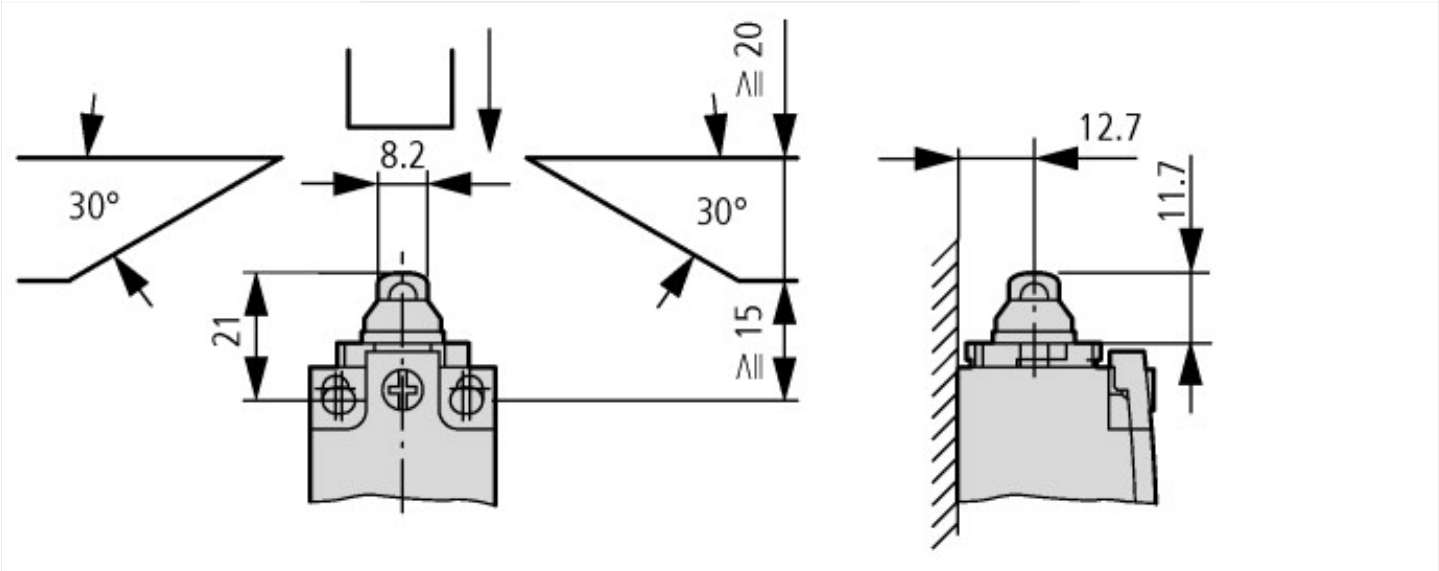

Assets (links)

- [Declaration of CE Conformity](#)
00003068
- [Instruction Leaflets](#)
IL053001ZU2018_06

Additional product information (links)

IL053001ZU LS-Titan position switch: basic device

