



Main switch assembly kit, handle black, size 1

**Part no.** NZM1-XHB  
**Catalog No.** 266626  
**EL-Nummer (Norway)** 4315575

**Delivery program**

|                              |  |   |
|------------------------------|--|---|
| Equipment supplied           |  | Door coupling rotary handle with rotary drive<br>NZM...XV4 extension shaft<br>External warning plate/markings plate in German/English<br>Black and yellow lightning symbol  |
| Product range                |  | Accessories   |
| Accessories                  |  | Main switch assembly kit  |
| Standard/Approval            |  | UL/CSA, IEC   |
| Construction size            |  | NZM1  |
| Description                  |  | Kit for use as a main switch  |
| Function                     |  | With black door coupling rotary handle  |
| Protection class             |  | IP66<br>UL/CSA Type 4X, Type 12   |
| Locking facility             |  | lockable on the 0 position on the handle using up to 3 padlocks<br>can also be modified in I position<br>With door interlock  |
| Door interlock               |  | Door interlock on OFF with max. 3 padlocks<br>can also be modified in I position<br>After the door interlock is activated, must not be opened while on ON or TRIP. Must only be opened on OFF<br>Can be modified such that it can be defeated from the outside using a screwdriver<br>Not defeated in the locked OFF position.<br>Can only be switched ON when the door is closed |
| Project planning information |  | External warning plate/designation label can be clipped on.<br>For enhanced busbar tag shroud on the incomer side, please order IP2X protection against contact with a finger.  |
| For use with                 |  | NZM1(-4)<br>PN1(-4), N(S)1(-4)  |

**Design verification as per IEC/EN 61439**

|  |  |  |
|--|--|--|
| IEC/EN 61439 design verification   |  |  |
| 10.2 Strength of materials and parts   |  |  |
| 10.2.2 Corrosion resistance  |  | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |  | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |  | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |  | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |  | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |  | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |  | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |  | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |  | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |  | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |  |  |
| 10.9.2 Power-frequency electric strength   |  | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |  | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |  | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |  | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |

|                                     |  |  |
|-------------------------------------|--|--|
| 10.12 Electromagnetic compatibility |  | Is the panel builder's responsibility. The specifications for the switchgear must be observed.           |
| 10.13 Mechanical function           |  | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |


## Technical data ETIM 7.0


|  |  |       |
|--|--|-------|
| Low-voltage industrial components (EG000017) / Handle for power circuit breaker (EC000229)   |  |       |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Handle for switch devices (ecl@ss10.0.1-27-37-04-14 [AKF012014]) |  |       |
| Lockable   |  | Yes   |
| Colour   |  | Black |
| Suitable for emergency stop  |  | No    |
| With extension shaft   |  | Yes   |
| Suitable for power circuit breaker   |  | Yes   |
| Suitable for switch disconnecter   |  | Yes   |

## Approvals

|                             |  |   |
|-----------------------------|--|---|
| Product Standards           |  | UL489; CSA-C22.2 No. 5-09; IEC60947, CE marking |
| UL File No.                 |  | E140305   |
| UL Category Control No.     |  | DIHS  |
| CSA File No.                |  | 022086  |
| CSA Class No.               |  | 1437-01   |
| North America Certification |  | UL listed, CSA certified                        |
| Degree of Protection        |  | IEC: IP66, UL/CSA Type 4X, 12                   |

## Dimensions

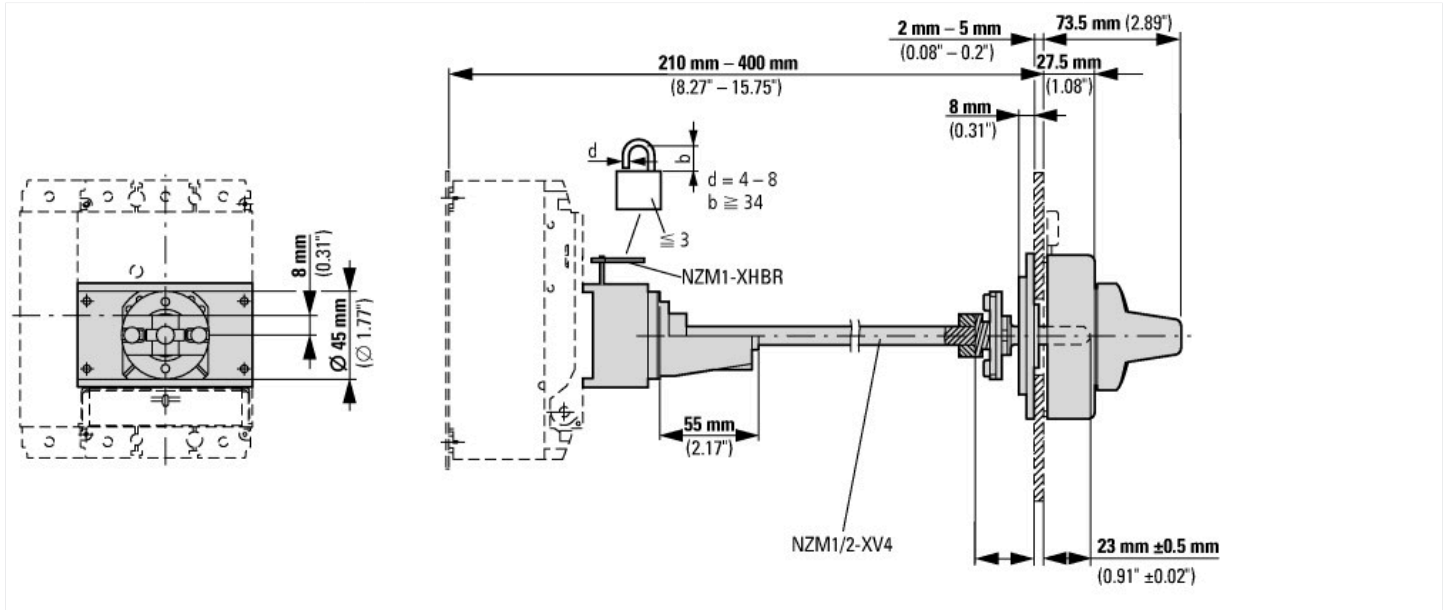

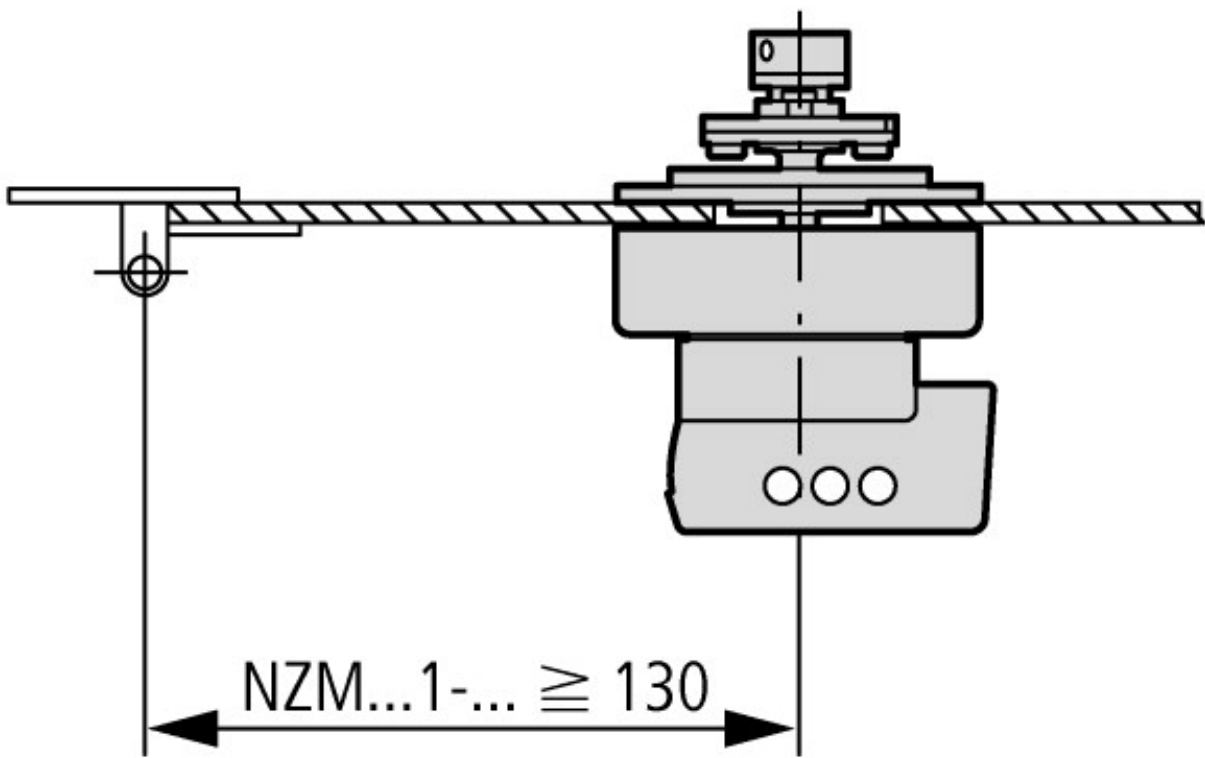

Minimum door coupling rotary handle clearance from door pivot point