


## Product Technical Sheet

21 feb 2022 19:02

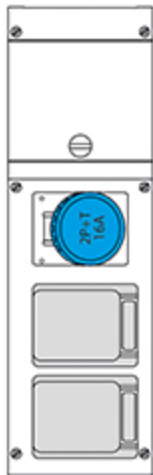

# 630.3506-362

## CUADRO DE OBRA

3 NR IP66 136x440x105mm

Product Approvals

| TECHDATA                      |                                 | STANDARDS AND LAWS                |   |
|-------------------------------|---------------------------------|-----------------------------------|---|
| Grado de protección           | Splash proof                    | EN 61439-4 (2013-03)              | [European Standard] Low-voltage switchgear and controlgear assemblies - Part 4: Particular requirements for assemblies for construction sites (ACS) |
| Tipo de instalación           | PORTÁTIL                        |                                   |   |
| Serie comercial               | Serie BLOCK                     | DIRECTIVE LOW VOLTAGE 2014/35 /UE | [European Directives] Low Voltage Directive   |
| Tipo de producto              | CUADRO DE OBRA                  |                                   |   |
| Descripción                   | CUADRO DE OBRA                  |                                   |   |
| Material                      | TERMOPLÁSTICO                   |                                   |   |
| Dimensiones                   | 136x440x105mm                   |                                   |   |
| Grado de protección IP        | IP66                            |                                   |   |
| Grado de protección IK        | IK08                            |                                   |   |
| Unidad de alimentación        | Clavija movil                   |                                   |   |
| N.º de salidas disponibles    | 3 NR                            |                                   |   |
| N.bases 2P+T 16A estandar it. | 2 NR                            |                                   |   |
| N.bases 2P+T 16A              | 1 NR                            |                                   |   |
| Tipo de aparato               | Interrupt. magnetot. 2P 16A     |                                   |   |
| Tipo de aparato               | Interrupt.diferen.2P 25A 0,03 A |                                   |   |
| Potencia máx                  | 3 KW                            |                                   |   |