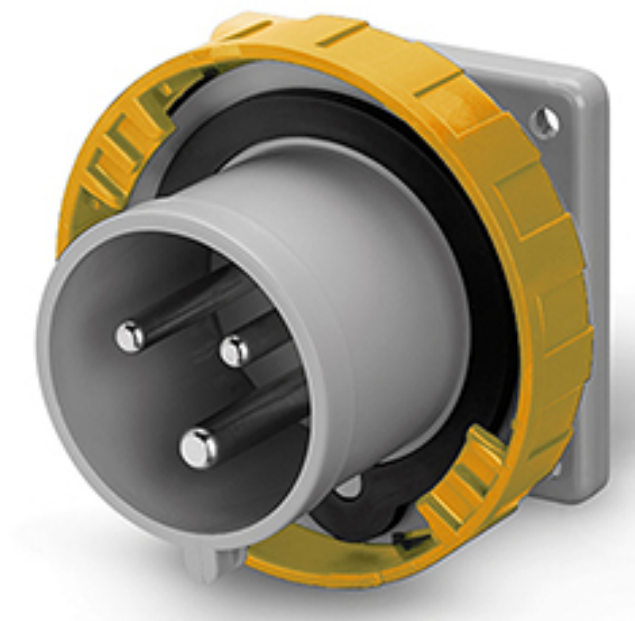


Article

248.3290
 APPLIANCE INLET 2P+E IP66/IP67 32A 4h

Picture**Master data**

Minimum order	10 NR
Net Weight	0.202 KG
EAN code	8001636223216
Harmonized System Code (HSCode)	85366990

TechData

Commercial series	OPTIMA Series
Synthetical description	FLUSH MOUNTING APPLIANCE INLET
Rated current	32A
Poles	2P+E
Hour position	4h
Rated voltage	100-130V
Working frequency	50Hz
Working frequency	60Hz
Colour	YELLOW
Protection degree IP	IP66/IP67/IP69
Types of available outlets	STRAIGHT
Terminals	Screw terminals
Flange	75X75MM

Approvals and Certifications

UE
 Declaration of conformity



EAC
 Eurasian Conformity

Standards and Laws

EN 60309-1 (1999)
 [European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 1: General requirements



EN 60309-2 (1999)
 [European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 2: Dimensional interchangeability requirements for pin and contact-tube accessories of harmonized configurations

Packaging**Annexed**

Description	Carton
Quantity	50
EAN code	8001636673158
Gross weight	11.85 KG
Volume	66990 CCM
Dimensions	385x580x300 (MM)

Description	Box
Quantity	10
EAN code	8001636673141
Gross weight	2.37 KG
Volume	9450.54 CCM
Dimensions	258x333x110 (MM)



Technical drawing [DWG]

.dwg



Technical drawing [PDF]

.pdf



Technical drawing [STP]

.stp

Articoli Collegati:

	570.90324	PLUG CAP 2/3P+E 30A 32A GREY
---	-----------	------------------------------