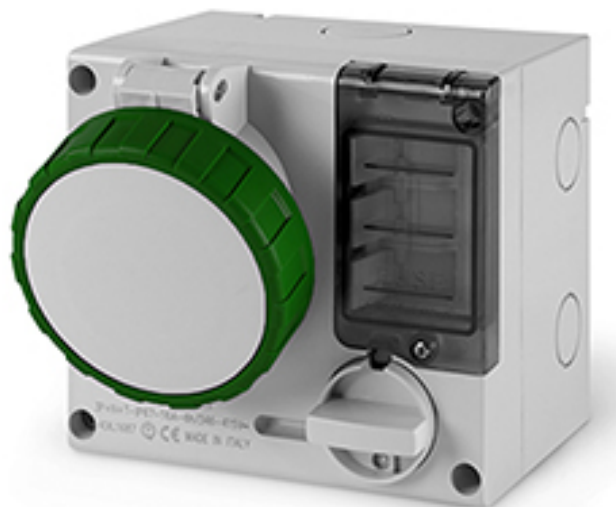


Article**506.16872**

INTERLOCKED SOCKET 3P+N+E IP67 16A 2h

Picture**Master data**

Minimum order	1 NR
Net Weight	0.917 KG
EAN code	8001636117812
Harmonized System Code (HSCode)	85366990

TechData

Commercial series	OMNIA Series
Synthetical description	INTERLOCKED SOCKET
Rated current	16A
Poles	3P+N+E
Hour position	2h
Rated voltage	>50V
Working frequency	>300-500Hz
Colour	GREEN
Protection degree IP	IP66/IP67
Flange	136X125MM_PAR

Approvals and Certifications

UE
Declaration of conformity



I.M.Q. - ENEC 03
European Norms Electrical Certification



EAC
Eurasian Conformity

Standards and Laws

EN 60309-1 (1999)
[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 1: General requirements



EN 60309-2 (1999)
[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 2: Dimensional interchangeability requirements for pin and contact-tube accessories of harmonized configurations



EN 60309-1/A1 (2007)
[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 1: General requirements



EN 60309-2/A1 (2007)
 [European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 2: Dimensional interchangeability requirements for pin and contact-tube accessories of harmonized configurations



EN 60309-4 (2007)
 [European Standard] Plugs, socket-outlets and couplers for industrial purposes. Switched socket-outlets and connectors, with or without interlock



EN 60309-1/A2 (2012)
 [European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 1: General requirements



EN 60309-2/A2 (2012)
 [European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 2: Dimensional interchangeability requirements for pin and contact-tube accessories of harmonized configurations



EN 60309-4/A1 (2012)
 [European Standard] Plugs, socket-outlets and couplers for industrial purposes. - Switched socket-outlets and connectors, with or without interlock

Packaging

Description	Carton
Quantity	6
EAN code	8001636540078
Gross weight	5.964 KG
Volume	18596.25 CCM
Dimensions	285x450x145 (MM)

Annexed



Instruction manual



Instruction manual



Technical drawing [DWG]



Technical drawing [PDF]



Technical drawing [STP]

Note:

> Blank side with drilling point mark 

> Fuses not supplied 

> Supplied with stainless steel fixing screws. 

> Note: in case of mounting with ADVANCE2 System, use METRIC drilling point mark. 

> The maximum amount of current available, taking into account the maximum overheating temperature allowed by the relevant standards, must be downgraded with respect to the nominal current by 25% for products with frequencies ranging above 100 Hz; contact Scame Technical Service for further information. 