



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Autotransformer AIM 1,6/0,8



Picture shows AIM 3,2/1,6


Advantages

- Low weight and small size (compared to isolating transformers)
- Integrated short circuit and overload protection
- Very high efficiency
- Very good moisture protection and low noise thanks to XtraDenseFill resin encapsulation (AIM 1.8/8 - AIM 5.0/2.5)
- Screw terminals under cover with strain relief

Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

Sample application

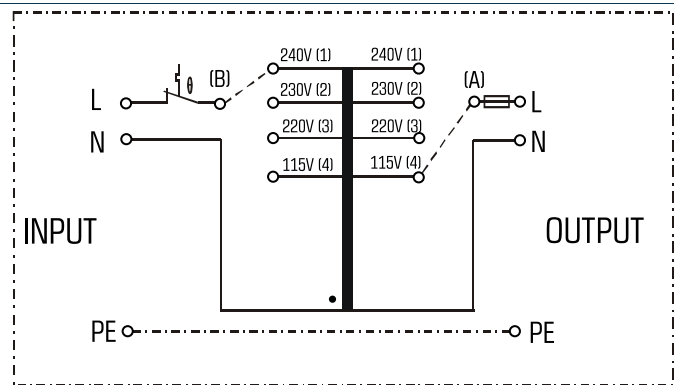

Standards



Autotransformer
to: VDE 0570 Part 2-13, DIN EN 61558-2-13, EN 61558-2-13,
IEC 61558-2-13

Approvals






Autotransformer AIM 1,6/0,8

Type		AIM 1,6/0,8
Electrical data	Input	
	Rated input voltage	115 Vac/220 Vac 230 Vac/240 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	115 Vac/220 Vac 230 Vac/240 Vac
	Rated output current	0.80 (PRI 115 / SEC 220, 230, 240);
		1.60 (PRI 115 / SEC 115);
		1.60 (PRI 220, 230, 240 / SEC 115, 220, 230, 240)
		4.70 W
	No-load loss (typ.)	4.70 W
	Environment	
	Ambient temperature max.	40 °C
Safety and protection		
Type	Resin encapsulated transformer	
Class of Insulation System	A	
Protection index	IP 20	
Safety class	May be used in protection category I and II. When protection category I devices are equipped the protective conductor in the output must be connected with the lead-in protective conductor.	
Short circuit strength	non-inherently short-circuit proof	
Order numbers		
Order Number	AIM 1,6/0,8	

Type		AIM 1,6/0,8
Terminal and mounting	Fixing method	Fixing holes in the terminal connection compartment
	Terminals	Screw-type terminal
Measures and weights		
Weight		2.10 kg

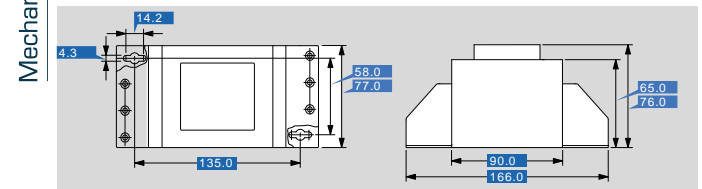

Subjects to change.



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Autotransformer encapsulated, PRI 115/220/230/240 Vac, SEC 0.8 - 16 A, 115/220/230/240 Vac	AIM1608	AIM 1,6/0,8	Buy on EAN