




Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Autotransformer AT3 110-48/50-4

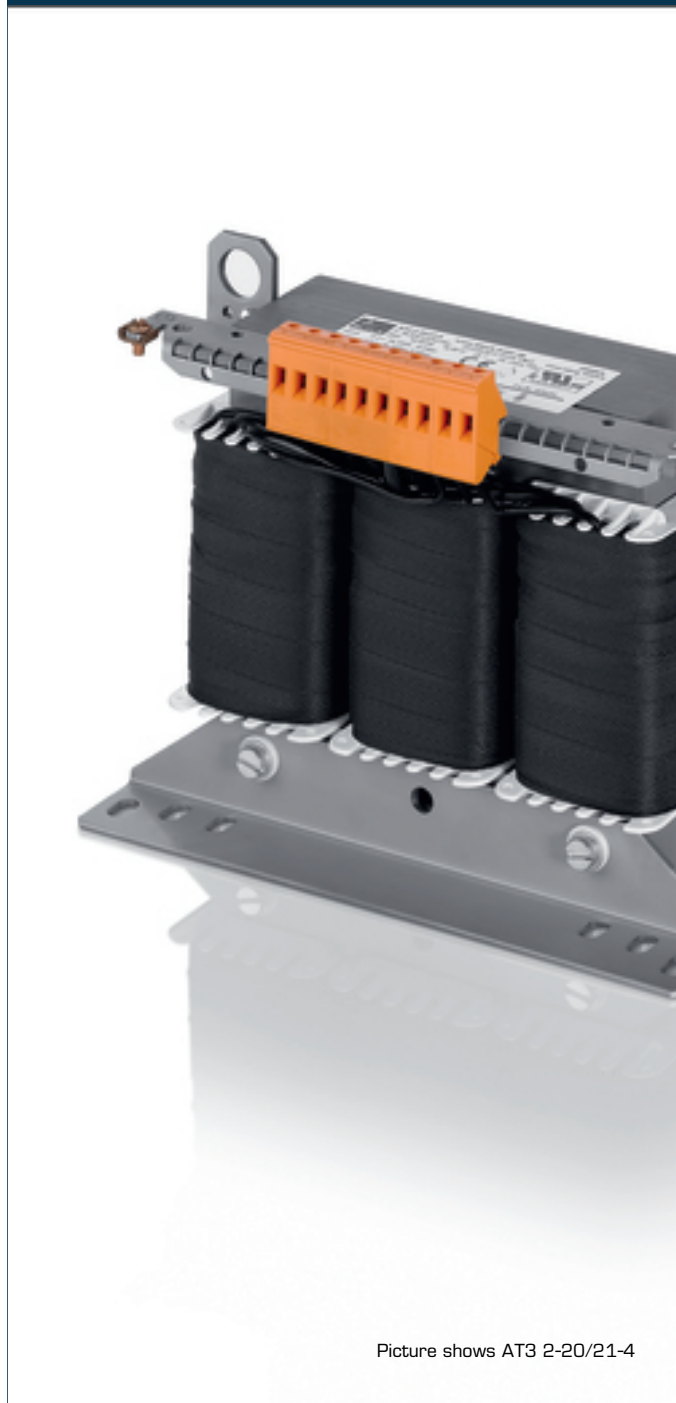

Picture shows AT3 2-20/21-4


Advantages

Low weight and small size (compared to isolating transformers)
Very high efficiency
Inverse operation possible
Patented assembly technology to lower heat losses
Very good corrosion protection and low noise thanks to BLOCKIMPEX vacuum impregnation
Fixed, contact protected screw connection terminals complying with UVV BGV A3
Multifunctional fixing rails with 12 oval slots
Enlarged fixing rail for easy installation from above
Integrated crane eyes

Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

Sample application

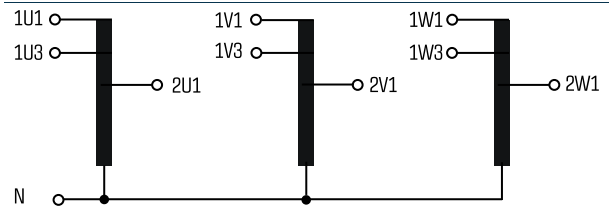

Standards




Autotransformer
to: VDE 0570 Teil 2-13, DIN EN 61558-2-13, EN 61558-2-13,
IEC 61558-2-13, UL 5085-1/-2, CSA 22.2 No.66

Approvals




UL 5085-1/-2, CSA 22.2 No.66



Autotransformer AT3 110-48/50-4

Type		AT3 110-48/50-4
Electrical data	Input	
	Rated input voltage	3 x 480/500 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	3 x 400 Vac
	Rated Power	110000 VA
	Vector group	YNΔ0
	Efficiency	97 %
	Approvals	
	Approvals	cURus
Environment		
Ambient temperature max.	40 °C	
Safety and protection		
Type	Open type	
Class of Insulation System	F	
Protection index	IP 00	
Safety class (prepared)	I	
Short circuit strength	non-short-circuit proof	
Test voltage	4000 Vac, 50 Hz	
Order numbers		
Order Number	AT3 110-48/50-4	

Type		AT3 110-48/50-4
Mechanical data	Terminal and mounting	
	Fixing method	Fixing rail
	Fixing screws	M12
	Terminals	Screw-type terminals
	Measures and weights	
	Weight	166.00 kg
	Core type	3 UI 240/110

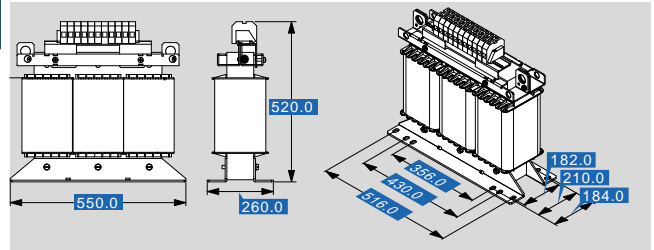

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Autotransformer PRI 3 x 200/208 - 3 x 690 Vac, SEC 2000 - 250000 VA, 3 x 400 Vac	AT311048504	AT3 110-48/50-4	Buy on EAN