




At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. <u>HERE</u>

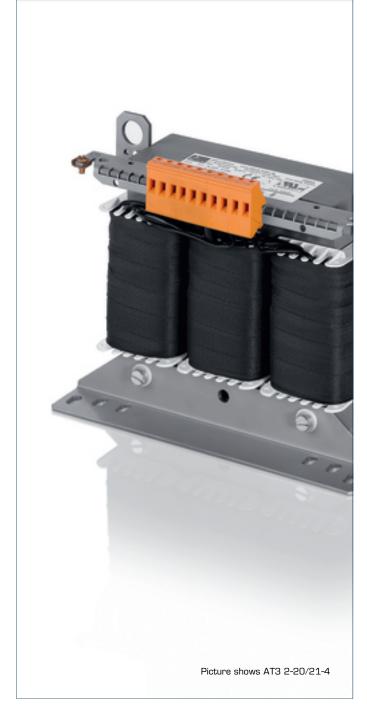

Advantages

Low weight and small size (compared to isolating transformers)

Very high efficiency

Inverse operation possible

Patented assembly technology to lower heat losses

Very good corrosion protection and low noise thanks to BLOCKIMPEX vacuum impregnation $% \left(1\right) =\left(1\right) \left(1\right) \left($

Fixed, contact protected screw connection terminals complying with UVV BGV ${\sf A3}$

Multifunctional fixing rails with 12 oval slots


Enlarged fixing rail for easy installation from above

Integrated crane eyes

Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

Sample application



Standards



Autotransformer to: VDE 0570 Teil 2-13, DIN EN 61558-2-13, EN 61558-2-13, IEC 61558-2-13, UL 5085-1/-2, CSA 22.2 No.66 **Approvals**




UL 5085-1/-2, CSA 22.2 No.66





Autotransformer AT3 15-69-4

Туре	AT3 15-69-4	Type	AT3 15-69-4
Input		Terminal and mounting Fixing method	
Rated input voltage	3 x 600/690 Vac	Fixing method	Fixing rail
Rated frequency	50 - 60 Hz	Fixing screws	M8
Output		☐ Terminals	Screw-type terminals
Output Rated output voltage	3 x 400 Vac	Terminals Measures and weights	
Rated Power	15000 VA		58.00 kg
Vector group	YNaO	.⊖ Core type	3 UI 180/63
Rated Power Vector group Efficiency Approvals	95 %	IB	
Approvals Approvals	cURus	Record type Core type	
Environment		2 0 1	
Ambient temperature max.	40 °C		
Safety and protection			340.0
Туре	Open type		
Class of Insulation System	F		155.0
Protection index	IP 00	410.0	155.0
Safety class (prepared)	1		
Short circuit strength	non-short-circuit proof		
Test voltage	4000 Vac, 50 Hz		
Order numbers			

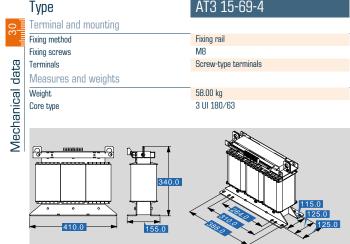





Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, click on the green button.

Product	Code	Reference	Product link
Autotransformer PRI 3 x 200/208 - 3 x 690 Vac, SEC 2000 - 250000 VA, 3 x 400 Vac	AT315694	AT3 15-69-4	Buy on EAN