



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

AC current supply for laboratories **BR 351**



Picture shows BR 1000

Advantages

Limited short-circuit protection

Analogue current and voltage indicator

Output circuit breakers may be operated from the front

Carry handle, mains cable with safety plug, shockproof socket for portable application

Applications

Isolating transformer with controllable output voltage for use in the laboratory.

Standards



Isolating transformer
to: VDE 0570 Part 2-4, DIN EN 61558-2-4, EN 61558-2-4, IEC 61558-2-4


Approvals



AC current supply for laboratories **BR 351**

Type		BR 351
Electrical data	Input	
	Rated frequency	50 - 60 Hz
	Rated input voltage	230 Vac
	Output	
	Rated output voltage	0 - 250 Vac
	Rated Power	350 VA
	Efficiency	92 %
	Environment	
	Ambient temperature max.	40 °C
	Type of cooling	self-cooling
	Safety and protection	
	Class of Insulation System	E
	Internal impedance	4.96 Ω
	Protection index	IP 20
	Safety class	II
Test voltage	3750 Vac, 50 Hz	
Type	Enclosed	
Short circuit strength	non-inherently short-circuit proof	
Order numbers		
Order Number	BR 351	

Type		BR 351
Mechanical data	Terminal and mounting	
	Terminals Input	Mains connecting cable with safety plug
	Terminals Output	Protective contact socket
	Measures and weights	
	Weight	13.00 kg
	Dimensions W x H x D	318 x 195 x 225 mm

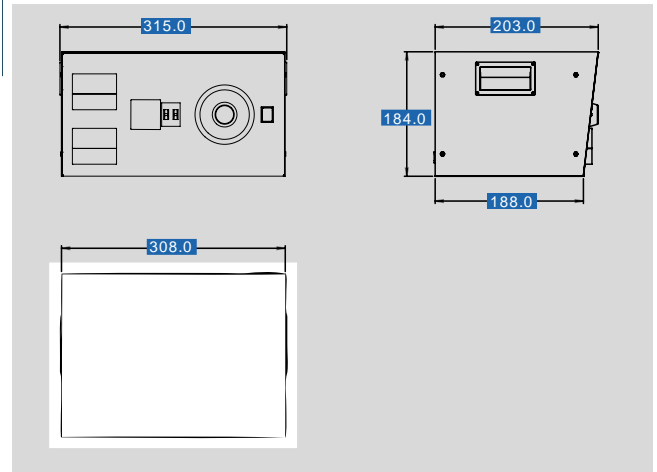

Subjects to change.



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
AC current supply for laboratories The output voltage is completely isolated from the mains and can be adjusted from 0 to 250 V	BR351	BR 351	Buy on EAN