



At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. <u>HERE</u>

ESP 230/2,8



Advantages

Low weight and small size (compared to isolating transformers)

Very high efficiency

Very good moisture protection and low noise thanks to BLOCKIMPEX vacuum impregnation $% \left(1\right) =\left(1\right) \left(1\right) \left($


Contact protected screw connection terminals complying with UVV BGV A3

Simple mounting thanks to robust metal footplate with oval slots

Applications

Autotransformer for example for setting the speed of single-phase fan motors.

Sample application



Standards



Autotransformer to: VDE 0570 Teil 2-13, DIN EN 61558-2-13, EN 61558-2-13, IEC 61558-2-13


Approvals






Autotransformer **ESP 230/2,8**

	Туре	ESP 230/2,8
Ĵ٢	Input	
1+	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
ıta	Output	
Electrical data	Rated output voltage	80 Vac/115 Vac/130 Vac 150 Vac/170 Vac/190 Vac
	Rated output current	2.80 A
당	Environment	
픮	Ambient temperature max.	40 °C
	Safety and protection	
	Туре	Open type
	Class of Insulation System	В
	Protection index	IP 00
	Safety class (prepared)	1
	Short circuit strength	non-short-circuit proof
	Order numbers	
	Order Number	ESP 230/2,8

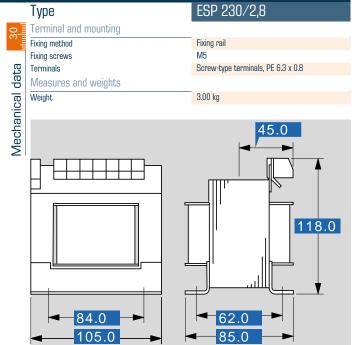







Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, click on the green button.

Product	Code	Reference	Product link
Autotransformer for single-phase fan motors, PRI 230 Vac, SEC 0.8 - 18 A, 80 - 310 Vac	ESP23028	ESP 230/2,8	Buy on EAN