



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Safety isolating transformer

FL 18/15



Picture shows FL 42/12

Advantages

Minimum size at high output
Low height
Dual input voltage for series or parallel connection
Dual output voltage for series or parallel connection
Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDenseFill resin encapsulation
Coil shell in 2-chamber technology
Self-extinguishing potting material


Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As an isolating transformer for the safe electrical isolation of the input and output sides. The transformer may be used to set up protective separation as a protective measure in accordance with VDE 0100.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application



Standards



Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,
UL 5085-1/-2, CSA 22.2 No.66

Approvals




ENEC 10 (VDE), UL 5085-1/-2, CSA 22.2 No.66



Safety isolating transformer FL 18/15

Electrical data		Type	FL 18/15
Input			
Rated input voltage			2 x 115 Vac
Rated frequency			50 - 60 Hz
Output			
Rated output voltage			2 x 15 Vac
Rated Power			18.0 VA
No-load voltage (app. x factor)			1.22
No-load loss (typ.)			1.50 W
Efficiency			77 %
Standards			
Classification			Safety isolating transformer
Approvals			
Approvals			cURus, ENEC 10 (VDE)
Environment			
Ambient temperature max.			40 °C
Safety and protection			
Type			Encapsulated
Class of Insulation System			VDE=E, UL-class 105
Protection index			IP 00
Safety class (prepared)			II
Short circuit strength			non-short-circuit proof
Order numbers			
Order Number			FL 18/15

Mechanical data		Type	FL 18/15
Terminal and mounting			
Terminals			Pins for PCB
Measures and weights			
Core type			UI 39/13,5
Weight			0.38 kg

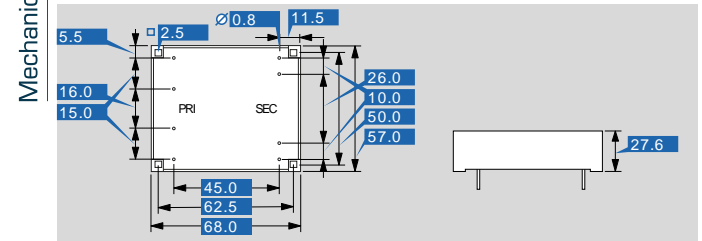

Subjects to change.



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Low profile transformer encapsulated, PRI 2 x 115 Vac, SEC 2 - 52 VA, 2 x 5 - 2 x 24 Vac	FL1815	FL 18/15	Buy on EAN