



**Automatización Eléctrica**

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

# Safety isolating transformer

## FLD 18/12



FLD 12/8


## Advantages

Minimum size at high output
Low height
Integrated overload protection using PTC in the input
Double input voltage for series or parallel connection
Double output voltage for series or parallel connection
Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDensiFill resin encapsulation
Coil shell in 2-chamber technology
Self-extinguishing potting material

## Applications

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

## Sample application



## Standards

Safety isolating transformer  
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6

## Approvals




ENEC 10 (VDE)



## Safety isolating transformer FLD 18/12

Electrical data		Type	FLD 18/12
<b>Input</b>			
Rated input voltage			2 x 115 Vac
Rated frequency			50 - 60 Hz
<b>Output</b>			
Rated output voltage			2 x 12 Vac
Rated Power			18.0 VA
No-load voltage (app. x factor)			1.30
No-load loss (typ.)			2.00 W
Efficiency			75 %
<b>Standards</b>			
Classification			Safety isolating transformer
<b>Approvals</b>			
Approvals			ENEC 10 (VDE)
<b>Environment</b>			
Ambient temperature max.			40 °C
<b>Safety and protection</b>			
Type			Encapsulated
Class of Insulation System			E
Protection index			IP 00
Safety class (prepared)			II
Short circuit strength			non-inherently short-circuit proof
<b>Order numbers</b>			
<b>Order Number</b>			<b>FLD 18/12</b>

Mechanical data		Type	FLD 18/12
<b>Terminal and mounting</b>			
Terminals			Pins for printed circuit boards
<b>Measures and weights</b>			
Core type			UI 39/17,0
Weight			0.45 kg

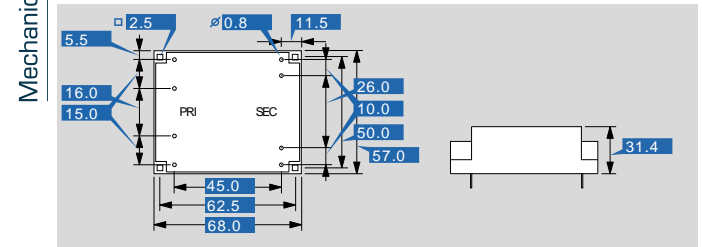

Subjects to change.



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Short circuit proof low profile transformer short circuit proof, encapsulated, PRI 2 x 115 Vac, SEC 4 - 48 VA, 2 x 6 - 2 x 18 Vac	FLD1812	FLD 18/12	<a href="#">Buy on EAN</a>