



# Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. <u>HERE</u>

### Safety isolating transformer FLE 35/15



# Standards

Safety isolating transformer to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6

# Advantages

Minimum size at high output

Low height

Integrated overload protection using PTC in the input

Double output voltage for series or parallel connection

Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDenseFill resin encapsulation


Coil shell in 2-chamber technology

Self-extinguishing potting material

# **Applications**

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

## Sample application








ENEC 10 (VDE)





# Safety isolating transformer FLE 35/15

|                 | Туре                            | FLE 35/15                          |
|-----------------|---------------------------------|------------------------------------|
| ያይ              | Input                           |                                    |
| 1+              | Rated input voltage             | 230 Vac                            |
|                 | Rated frequency                 | 50 - 60 Hz                         |
| Ita             | Output                          |                                    |
| g               | Rated output voltage            | 2 x 15 Vac                         |
| ō               | Rated Power                     | 35.0 VA                            |
| .e              | No-load voltage (app. x factor) | 1.20                               |
| Electrical data | No-load loss (typ.)             | 3.20 W                             |
|                 | Efficiency                      | 78 %                               |
|                 | Standards                       |                                    |
|                 | Classification                  | Safety isolating transformer       |
|                 | Approvals                       |                                    |
|                 | Approvals                       | ENEC 10 (VDE)                      |
|                 | Environment                     |                                    |
|                 | Ambient temperature max.        | 40 °C                              |
|                 | Safety and protection           |                                    |
|                 | Туре                            | Encapsulated                       |
|                 | Class of Insulation System      | E                                  |
|                 | Protection index                | IP 00                              |
|                 | Safety class (prepared)         | II                                 |
|                 | Short circuit strength          | non-inherently short-circuit proof |
|                 | Order numbers                   |                                    |
|                 | Order Number                    | FLE 35/15                          |
|                 |                                 |                                    |

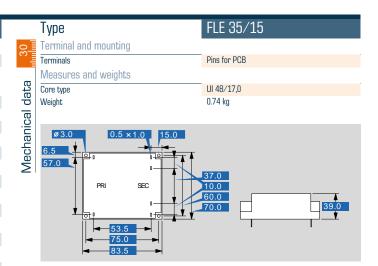







Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

#### To access the product, <u>click on the green button</u>.

| Product                                                                                                                          | Code    | Reference | Product link |
|----------------------------------------------------------------------------------------------------------------------------------|---------|-----------|--------------|
| Short circuit proof low profile transformer short circuit proof,<br>encapsulated, PRI 230 Vac, SEC 4 - 48 VA, 2 x 6 - 2 x 18 Vac | FLE3515 | FLE 35/15 | Buy on EAN   |