



**Automatización Eléctrica**

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)






# Safety isolating transformer FLN 30/18

Type		FLN 30/18	
Electrical data	Not for new designs Alternative type FL 30/18		
	<b>Input</b>		
	Rated input voltage	2 x 115 Vac	
	Rated frequency	50 - 60 Hz	
	<b>Output</b>		
	Rated output voltage	2 x 18 Vac	
	Rated Power	30.0 VA	
	No-load voltage (app. x factor)	1.19	
	No-load loss (typ.)	2.30 W	
	Efficiency	77 %	
	<b>Standards</b>		
	Classification	Safety isolating transformer	
	<b>Approvals</b>		
	Approvals	cURus, ENEC 10 (VDE)	
	<b>Environment</b>		
	Ambient temperature max.	70 °C	
	<b>Safety and protection</b>		
	Type	Encapsulated	
Class of Insulation System	B		
Protection index	IP 00		
Safety class (prepared)	II		
Short circuit strength	non-short-circuit proof		
<b>Order numbers</b>			
Order Number	FLN 30/18		

Type		FLN 30/18
<b>Terminal and mounting</b>		
Terminals	Pins for PCB	
<b>Measures and weights</b>		
Core type	UI 39/21	
Weight	0.57 kg	

30  
Mechanical data

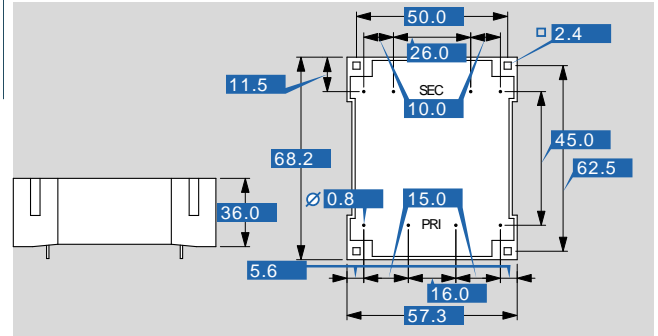

Subjects to change.



**Automatización Eléctrica**  
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Low profile transformer Discontinued model, alternative type FL	FLN3018	FLN 30/18	<a href="#">Buy on EAN</a>