




Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Line reactor, three-phase **LR3 40-4/160**

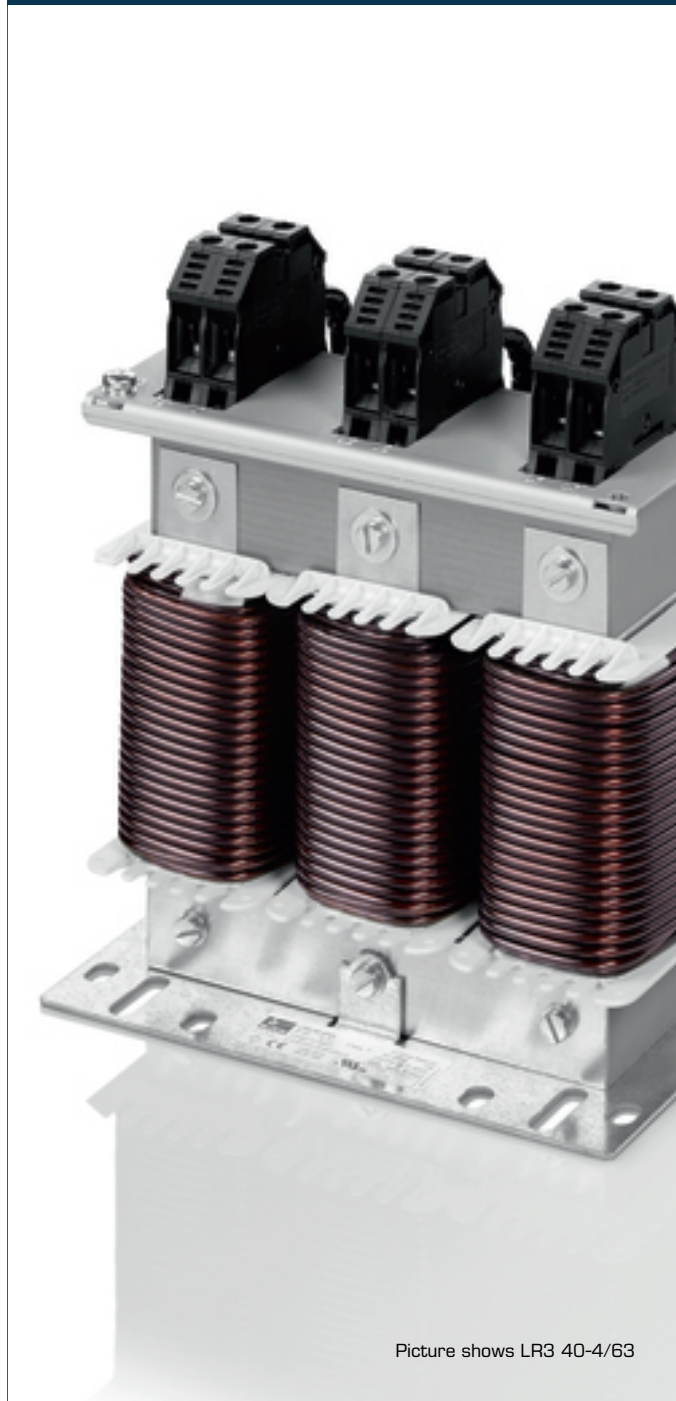

Picture shows LR3 40-4/63

Advantages

Use as line reactor, commutating reactor or PFC reactor
Ensuring the short-circuit voltage of 3 - 5 % to the mains
Power harmonic damping
Starting current limitation
Increases the service life of consumers
Low ripple
Bridging voltage dips
Peak current limitation
Very good corrosion protection and low noise thanks to BLOCKIMPEX vacuum impregnation
Integrated lifting rings
Multifunctional fixing rails

Applications

Line reactor to minimise mains pollution, to reduce the reactive-power components and charging currents in the DC link capacitor and to improve the $\cos(\phi)$.

Standards




Line- and commutation reactor to
DIN EN 61558-2-20, IEC 61558-2-20, UL 506, CSA 22.2

Approvals




UL 506, CSA 22.2



Line reactor, three-phase LR3 40-4/160

Type		LR3 40-4/160
Electrical data	Operating data	
	Rated voltage	3 x 400 Vac
	Rated voltage (IEC)	3 x 690 Vac
	Rated voltage (UL)	3 x 600 Vac
	Short circuit voltage uK	4 % @ 400 Vac
	Voltage drop	9.2 Vac
	Rated current	3 x 160 A
	Rated frequency	50 - 60 Hz
	Inductivity	0.190 mH
	Inductivity deviation	±10%
	Approvals	
	Approvals	cURus
	Environment	
Ambient temperature	-10 °C to +40 °C	
Type of cooling	AN	
Safety and protection		
Type	Open type	
Class of Insulation System	IEC-H, UL-class 180	
Protection index	IP 00	
Safety class (prepared)	I	
Test voltage	4000 Vac	
Order numbers		
Order Number	LR3 40-4/160	

Type		LR3 40-4/160
Mechanical data	Terminal and mounting	
	Terminals phase	Flat copper for M8
	Fixing method	Fixing rail
	Fixing screws	M8
	Measures and weights	
	Weight	25.50 kg

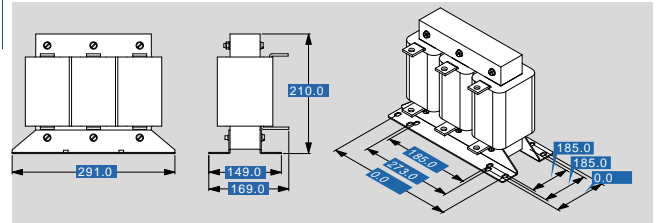



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Line reactor, three-phase 400 Vac, 2 - 1600 A, Short circuit voltage (uK): 3 - 5 %	LR3404160	LR3 40-4/160	Buy on EAN