




At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. <u>HERE</u>

Motor reactor

MDB 400/6,3

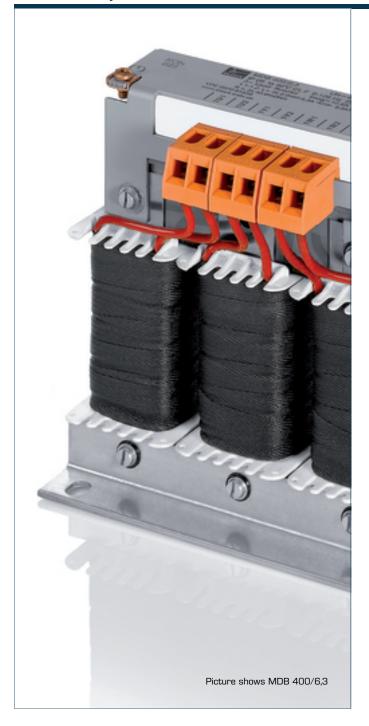

Advantages

High damping of edge steepness

High damping of inverter switching frequency

Reduction of leakage current

Long shielded cable lengths possible

High efficiency

Very good corrosion protection and low noise thanks to $\ensuremath{\mathsf{BLOCKIMPEX}}$ vacuum impregnation

Standards



Output reactor for frequency converter DIN EN 61558-2-20, IEC 61558-2-20


Approvals





Motor reactor MDB 400/6,3

	Туре	MDB 400/6,3
۲	Operating data	
Electrical data +	Rated voltage	3 x 400 Vac
	Voltage range	0 - 3 x 500 Vac
	Rated current	6.30 A
	for motor rated output approx.	2.20 kW
	Inductivity	2.000 mH
	Rated frequency	0 - 120 Hz
	Switching frequency	2 - 6 kHz
<u>ĕ</u>	Environment	
ш	Ambient temperature max.	40 °C
	Safety and protection	
	Туре	Open type
	Class of Insulation System	F
	Protection index	IP 00
	Safety class (prepared)	I
	Test voltage	2500 Vac, 50 Hz
	Order numbers	
	Order Number	MDB 400/6,3

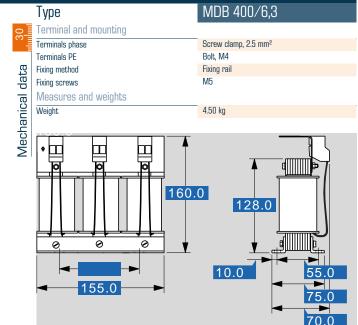







Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, click on the green button.

Product	Code	Reference	Product link
Motor reactor du/dt limitation, for 2 - 6 kHz switching frequencies, no converter overload, 3 x 6.3 - 3 x 176 A	MDB40063	MDB 400/6,3	Buy on EAN