



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. <u>HERE</u>

Autotransformer **PVAT3 20**



Standards

Autotransformer

to: VDE 0570 Teil 2-13, DIN EN 61558-2-13, EN 61558-2-13, IEC 61558-2-13, UL 5085-1/-2, CSA 22.2 No.66

Ò

Advantages

- Low weight and small size (compared to isolating transformers)
- Very high efficiency
- Very good corrosion protection and low noise thanks to BLOCKIMPEX vacuum impregnation
- Quick to cable up thanks to the use of spring-clamp terminals

Applications

Autotransformers to adjust the supply voltage of three-phase switching power supplies from 690 Vac to 400 Vac.






UL 5085-1/-2, CSA 22.2 No.66



BLOCK Transformatoren-Elektronik GmbH • Phone +49 4231 678-0 • info@block.eu



Autotransformer **PVAT3 20**

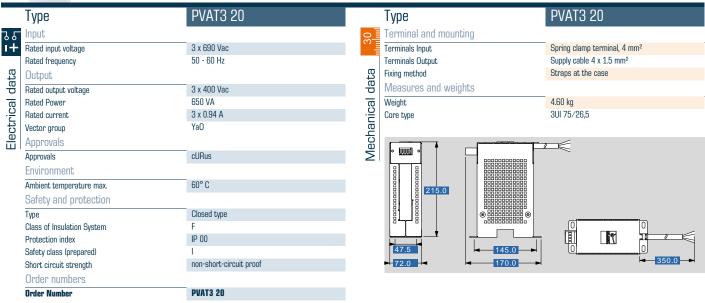





Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, <u>click on the green button</u>.

Product	Code	Reference	Product link
Autotransformer PRI 3 x 690 Vac, SEC 3 x 0,94/2,00 A, 3 x 400 Vac	PVAT320	PVAT3 20	Buy on EAN