



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Safety isolating transformer

VBN 0,7/2/9



Picture shows VBN 2,1/2/6

Advantages

- Minimum size at high output
- Unconditionally short-circuit proof
- Also with double output voltage for series or parallel connection
- Designed for high ambient temperatures
- Permanent corrosion protection, high insulation value and maximum electrical reliability thanks to XtraDenseFill resin encapsulation
- Coil shell in 2-chamber technology
- Self-extinguishing potting material

Applications

As a mains transformer for adjustment of the voltage and simple electrical isolation.

As a safety isolating transformer for the safe electrical isolation of the input and output sides. The transformer is suitable for creating SELV and PELV circuits because of the limit on the output voltage.

Sample application



Standards



Safety isolating transformer
to: VDE 0570 Part 2-6, DIN EN 61558-2-6, EN 61558-2-6, IEC 61558-2-6,
UL 5085-1/-2, CSA 22.2 No.66

Approvals



ENEC 10 (VDE), UL 5085-1/-2, CSA 22.2 No.66




Safety isolating transformer

VBN 0,7/2/9

Type		VBN 0,7/2/9
Electrical data	Input	
	Rated input voltage	230 Vac
	Rated frequency	50 - 60 Hz
	Output	
	Rated output voltage	9.0 Vac
	Rated Power	0.7 VA
	No-load voltage (app. x factor)	1.60
	No-load loss (typ.)	2.20 W
	Efficiency	33 %
	Standards	
Classification	Safety isolating transformer	
Approvals		
Approvals	cURus, ENEC 10 (VDE)	
Environment		
Ambient temperature max.	60 °C	
Safety and protection		
Type	Encapsulated	
Class of Insulation System	B	
Protection index	IP 00	
Safety class (prepared)	II	
Short circuit strength	inherently short-circuit proof	
Order numbers		
Order Number	VBN 0,7/2/9	

Type		VBN 0,7/2/9
Mechanical data	Terminal and mounting	
	Terminals	Pins for printed circuit boards
Mechanical data	Measures and weights	
	Pin (ø)	0.8 mm
	Core type	EI 30/5,5
	Weight	0.04 kg

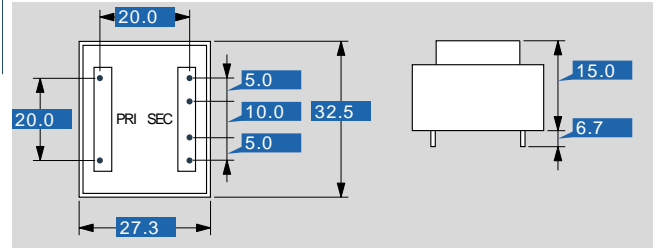

Subjects to change.

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Short circuit proof PCB transformer Short circuit proof safety isolating transformer to IEC 61558-2-6, DIN EN 61558-2-6, VDE 0570 part 2-6, C-UL-US and ENEC 10 (VDE) Approval max. 70°C ambient temperature (VB 3,2 = 50°C) *Transformer to IEC 61558-2-1, DIN EN 61558-2-1, VDE 0570 part 2-1 (without VDE-Approval) the dimension for the height includes the length of pins (5mm)	VBN0729	VBN 0,7/2/9	<div style="background-color: #4CAF50; color: white; padding: 5px; text-align: center;">Buy on EAN</div>