



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. <u>HERE</u>

Autotransformer **VT 200-EN**



Advantages

Low weight and small size (compared to isolating transformers)

Very high efficiency

Very good moisture protection and low noise thanks to BLOCKIMPEX vacuum impregnation


Contact protected screw connection terminals complying with UVV BGV A3

Simple mounting thanks to robust metal fixing rail with oval slots

Applications

Autotransformer for adjustment of the voltage on the input and output sides with no requirement for electrical isolation.

Sample application



Standards

Autotransformer to: VDE 0570 Teil 2-13, DIN EN 61558-2-13, EN 61558-2-13, IEC 61558-2-13, UL 5085-1/-2, CSA 22.2 No.66






UL 5085-1/-2, CSA 22.2 No.66



BLOCK Transformatoren-Elektronik GmbH • Phone +49 4231 678-0 • info@block.eu



Autotransformer **VT 200-EN**

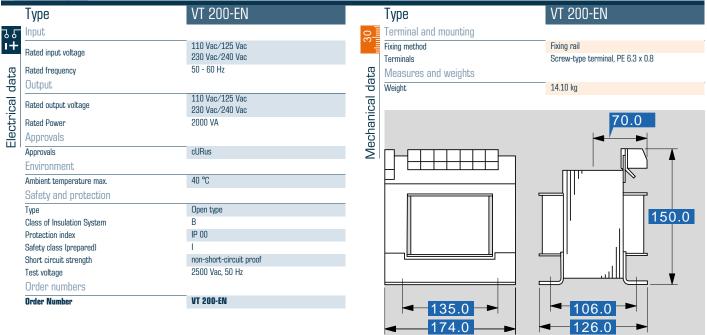







Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, <u>click on the green button</u>.

Product	Code	Reference	Product link
Autotransformer PRI 110/125/230/240 Vac, SEC 150 - 3000 VA, 110/125/230/240 Vac	VT200EN	VT 200-EN	Buy on EAN