



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)



HYDRAULIC PRESSHEAD

general features

Crimping force kN	Max operating pressure bar	Dimensions mm		Weight kg
		length	width	
230	700	290	120	5,5

MAIN APPLICATIONS - max section mm²

L.V. lugs and splices	Insulated terminals	"C" sleeve connectors	H.V. lugs and splices
630	300	240	630

STORAGE

Type	Dimensions mm	Weight kg	Supplied with the tool	Purchase separately
VAL ECW-H3D*	345x305xh90	4,2	—	✱

* Suitable for storage of the head and 10 sets of dies

ECW-H3D ACCESSORIES FOR CUTTING CONDUCTORS

Die Type	Cutting Capacity	Conductor Type
WT2-3D	Ø 20 mm	Cu, Alu, Aldrey and Alu-Steel
	Ø 20 mm	Extra flexible Steel with ≥ 200 strands
	This die is suitable to cut Steel conductors (R ≤ 160 daN/mm ²) having the most common strandings, i.e.:	
	19 x 1,2 = Ø est. 6,0 mm 7 x 3,0 = Ø est. 9,0 mm 19 x 2,1 = Ø est. 10,5 mm 19 x 2,3 = Ø est. 11,5 mm	

ECW-H3D



Hydraulic presshead complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 700 bar max, (see page 172-176).

Adaptor type **AU230-130D** is available as an optional extra enabling the head to utilise the semi-circular slotted dies which are common to most 130 kN tools. Also available is a series of dies for the compression of DIN electrical connectors, and a die for cutting Copper, Aluminium, aldreyl, Aluminium-Steel and Steel conductors.



HYDRAULIC PRESSHEAD

general features

Crimping force kN	Max operating pressure bar	Dimensions mm		Weight kg
		length	width	
230	700	320	110	6,4

MAIN APPLICATIONS - max section mm²


Alu lugs and splices	Cu lugs and splices
500	630

STORAGE

Type	Dimensions mm	Weight kg	Supplied with the tool	Purchase separately
VAL 231*	470x273xh96	7,2	✱	—

* Suitable for storage of the head and dies for Aluminium compression

RHU 231

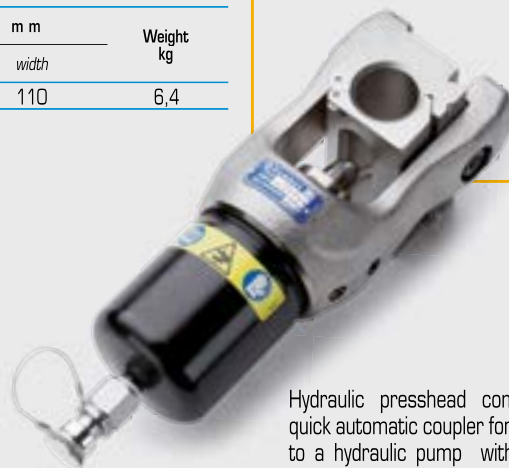

Hydraulic presshead complete with quick automatic coupler for connection to a hydraulic pump with a working pressure of 700 bar max, (see page 172-176).

For crimping up to 500 sqmm Aluminium.

Dies are available also for crimping Copper connectors.



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
HOLDER PMF-01 90120 (15 TR)	4008320	90120	Buy on EAN
WT2-3D DIE SET	2636970	WT2-3D	Buy on EAN
ECW-H3D PRESSHEAD	2630073	ECW-H3D	Buy on EAN
RHU231 PRESSHEAD	2680067	RHU-231	Buy on EAN
VAL ECW-H3D STEEL CASE	2593421	VALECW-H3D	Buy on EAN
AU230-130D ADAPTOR	2636960	AU230-130D	Buy on EAN