



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking **HERE**. [HERE](#)

ENGINEERING  
TOMORROW



## Selection Guide 1.1 kW – 400 kW

### VLT® HVAC Drive FC 102

**98%**

Energy efficiency  
Save energy and  
money with up to  
98% efficient VLT®  
drives.

**VLT®**  
HVAC Drive

[www.danfoss.com/drives](http://www.danfoss.com/drives)

**VLT®**  
THE REAL DRIVE





The drives up  
1.4 MW are handled  
in a separate  
brochure

1.1 – 400 kW

## Dedicated drive for highest energy efficiency and reliability

The VLT® HVAC drive is a dedicated, globally supported drive that combines flexibility and efficiency in a package designed to minimize total system and lifecycle costs in HVAC applications.

Designed to provide the highest efficiency solution with both asynchronous and permanent magnet motors from all major suppliers, the VLT® HVAC drive is the leading drive for heating, ventilation and air conditioning systems. The motor independent drive can be installed in any fan or pump system and provide years of reliable, maintenance free operation.

When used in Danfoss' EC+ concept, the HVAC drive plays a significant part in enabling building owners to meet ever stricter efficiency and environmental legislation effectively and cost efficiently.

Every VLT® HVAC Drive is based on 25 years of experience and innovation. Easy to use, all models follow the same basic design and operating principle. Once you know one, you know them all. This selection guide helps you to choose and configure your perfect drive for applications from 1.1-400 kW.



**Up to 50° C ambient  
temperature without  
derating**



#### **GLOBAL REACH**

Danfoss' efficient global logistics setup makes it possible to ship VLT® drives quickly to any destination.

Danfoss' global support organization is geared to react swiftly to resolve issues to help you reduce downtime. In the event of issues Danfoss' global hotline helps you find the right solution quickly and efficiently.

In order to provide fast support in major industrial areas Danfoss is also present with highly trained, dedicated professionals. Based close to chemical hotspots, marine hubs and major industrial areas around the world, Danfoss experts are ready to provide fast access to drive and application expertise.

#### **TRAINING BASED ON EXPERIENCE**

Keep up to date on trends, methods and features that save additional energy or offer new technical opportunities to increase your product quality or decrease the downtime of your plant.

Receive the same quality training anywhere in the world with Danfoss-developed material and trainers. Training can take place at one of Danfoss' facilities or directly at the customer's own facility. Teaching is conducted by local trainers who have broad experience in the many conditions that may affect performance, so you get the most out of your Danfoss solution.

Additionally, the new online platform Danfoss Learning offers you the opportunity to extend your knowledge in small and compact lessons up to extensive training courses, when and wherever you want.

Read more at [learning.danfoss.com](http://learning.danfoss.com)

# Flexible, modular and adaptable Built to last

**The VLT® HVAC Drive is built on a flexible, modular design concept to provide an extraordinarily versatile motor control solution. Equipped with a wide range of HVAC features owners can achieve optimal fan and pump control, higher quality output and reduce costs related to spare parts and service, and much more.**

## Built-in EMC filters

VLT® HVAC Drive units are equipped with integrated DC link chokes and EMC filters as standard features. This enables them to reduce grid pollution and eliminate the cost and effort of fitting external EMC components and related wiring.

## Reduce costs with compact drives

A compact design and efficient heat management enable the drives to take up less space in control rooms and panels in all kinds of environments. Especially impressive is the 315 kW, 400 V version, which is among the smallest in its power class on the market today, and is available in an IP 54 enclosure.

Compact dimensions are also an advantage in applications where drive space is restricted. This makes it possible for designers to develop smaller applications without being forced to compromise on protection and grid quality. For example, the D frame versions of the VLT® HVAC Drive FC 102 from 110-400 kW are 25-68% smaller than equivalent drives.

The IP 20 version is optimized for cabinet mounting and features covered power terminals to prevent accidental

contact. The unit can also be ordered with optional fuses or circuit breakers in the same package size. Control and power cables are fed in separately at the bottom.

The frequency converters combine a flexible system architecture, which allows them to be adapted to specific applications, with a uniform user interface across all power classes. This allows you to adapt the drive to the exact needs of your specific application. As a result project work and costs are subsequently reduced. The easy to use interface reduces training requirements. The integrated SmartStart guides users quickly and efficiently through the setup process, which results in fewer faults due to configuration and parameterization errors.

## Freedom to design efficient systems

HVAC drives are built on a flexible system architecture, which allows them to be adapted to specific applications to provide maximum system efficiency.

Available in a performance range from 1.1 kW to 1.4 MW the FC 102 series can control nearly all standard industrial motor technologies, including permanent magnet motors, copper rotor motors and direct line PM.

The frequency converter is designed to work with all common supply voltages: 200, 380-480 V, 525-600 V and 690 V.

As a result, system designers, OEMs and end users can connect the drive to their chosen motor and reduce project costs with a solution that performs to the highest standards.



## VLT® PLATFORM HIGHLIGHTS

- **Versatile, flexible, configurable**
- **EMC filters integrated as standard**
- **Asynchronous & PM motor control**
- **9 fieldbuses supported**
- **Up to 1.4 MW in common voltages**
- **Unique user interface**
- **Globally supported**

# Size and protection class The perfect fit for your application

All Danfoss VLT® frequency converters follow the same design principle for fast, flexible and fault-free installation and efficient cooling.

VLT® HVAC Drives are available in a broad range of enclosures sizes and protection ratings from IP 20 to IP 66 to enable easy installation in all environments: mounted in panels, switch rooms or as stand-alone units for heating, ventilation and air conditioning.


**Cost saving heat management**  
In VLT® HVAC Drives the cooling air and the internal electronics is separated, protecting electronics

from contaminants. At the same time it removes heat efficiently which helps to prolong product life, increase the overall availability of the system and reduce faults related to high temperatures.

For example, by exhausting heat directly outside it is possible to reduce the size of the cooling system in the panel or switch room. This can be achieved with Danfoss' panel through cooling system or the extremely

efficient back channel cooling concept, that also allows to conduct the heat into the outside of the control room. Both methods make it possible to reduce the initial cost of the panel or switch room.

In daily use the benefits are equally clear as the energy consumption related to cooling can be reduced significantly. This means that designers can reduce the size of the air conditioning system, or even eliminate it entirely.

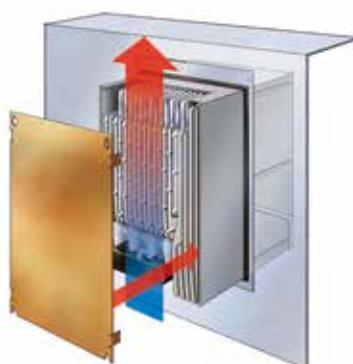


## PANEL THROUGH COOLING

An accessory mounting kit for small and mid-range drives enables heat losses to be directed directly outside the panel room.




## BACK CHANNEL COOLING

By directing air through a rear cooling channel up to 85-90% of the drive's heat loss is removed directly outside the installation room.

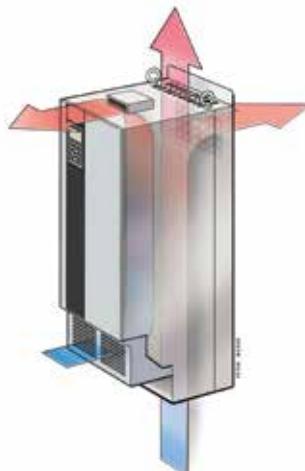

## NO AIR OVER ELECTRONICS

Complete separation between cooling air and the internal electronics ensure efficient cooling.

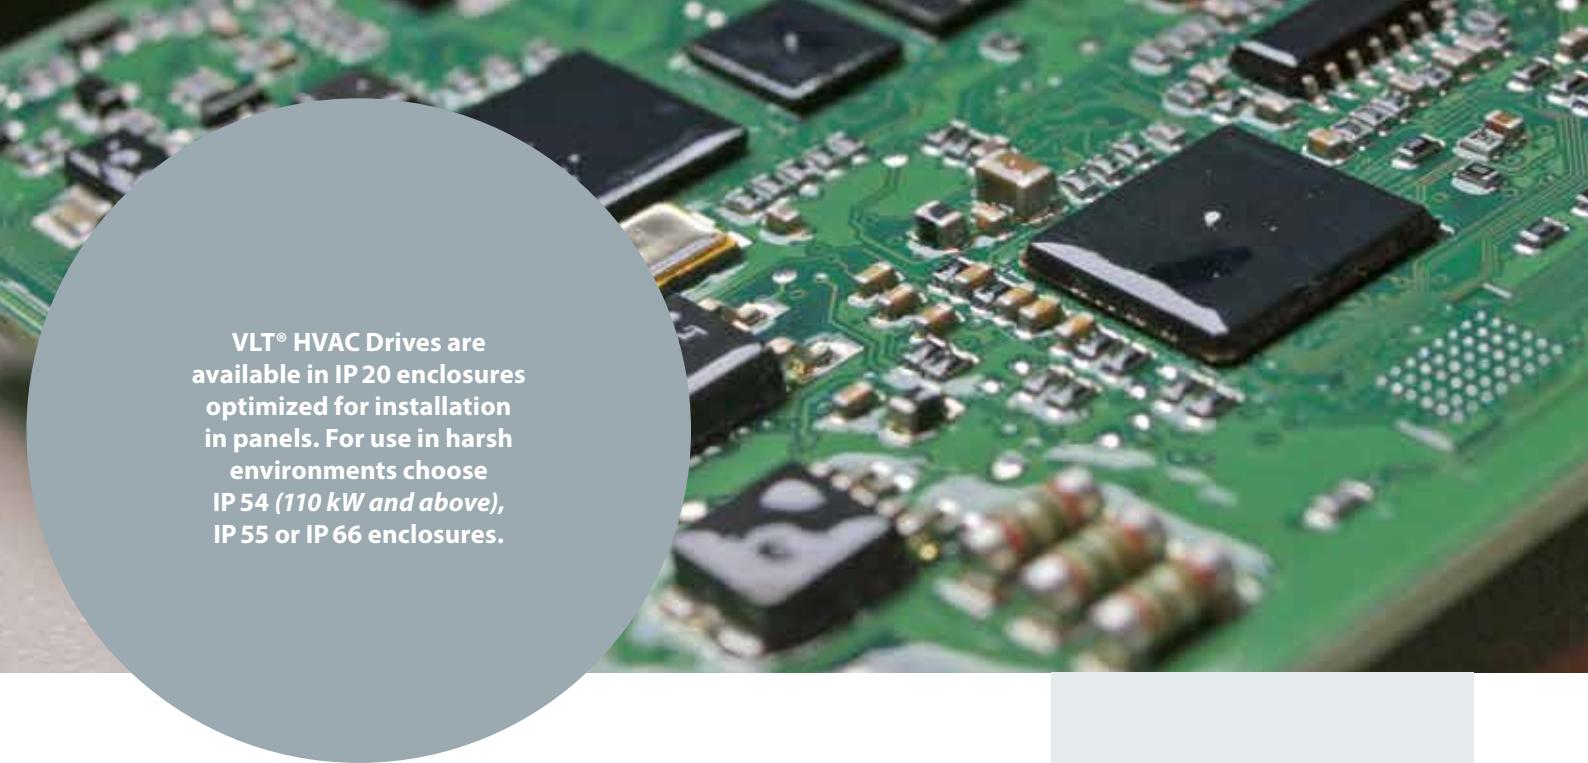


VLT® HVAC Drives are available in IP 20 enclosures optimized for installation in panels. For use in harsh environments choose IP 54 (110 kW and above), IP 55 or IP 66 enclosures.

### Coated circuit boards

The VLT® HVAC Drive is as standard conforming to class 3C2 (IEC 60721-3-3). If used in especially harsh conditions it is possible to order a special coating that complies with class 3C3.

### Ruggedized for extra protection

The VLT® HVAC Drive is available in a 'ruggedized' version, that ensures that components remain firmly in place in environments characterized by high degrees of vibration such as Marine and mobile equipment.

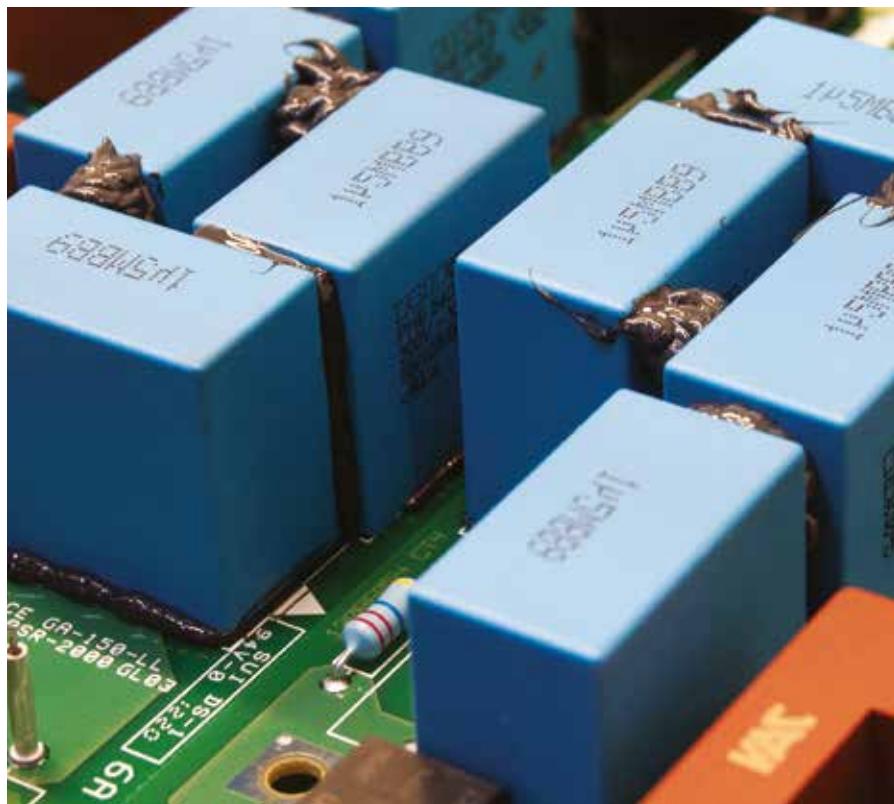

### RETROFITTING. FAST UPGRADE TO NEWEST TECHNOLOGY PLATFORM




As technologies evolve and newer, smaller and more efficient models replace old drives, it is important to Danfoss that you can change and upgrade as easily as possible. Minimize downtime in your production and update your installation in a few minutes with prepared tools from Danfoss. With a Danfoss conversion kit it is easy and fast to prepare your application for the future:


- Mechanical adaptation
- Electric adaptation
- Parameter adaptation



**Danfoss**  
**VLT® HVAC Drives**  
are equipped with DC  
chokes that reduce  
mains interference  
to a THDi of 40%.

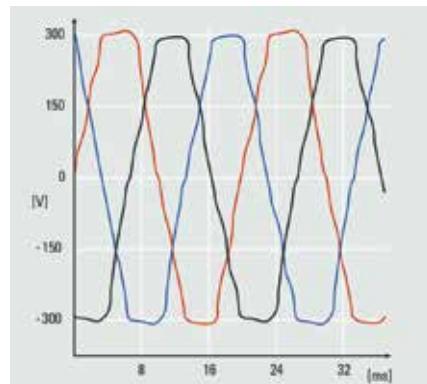

**HARMONIC DISTORTION**  
Electrical interference reduces efficiency  
and risks harming equipment.

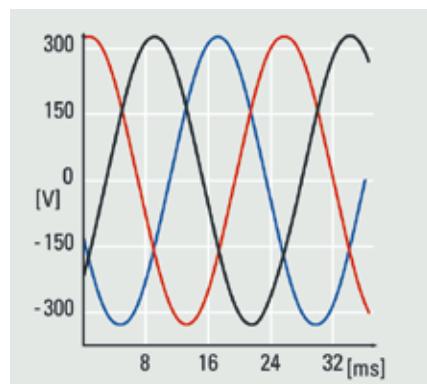

**OPTIMISED HARMONIC  
PERFORMANCE**  
Efficient harmonic mitigation protects  
electronics and increases efficiency.



# Optimize performance and grid protection

## Built-in protection as standard

The VLT® HVAC Drive FC 102 contains all modules necessary for compliance with EMC standards.

A built-in scalable RFI filter minimizes electromagnetic interference.

Integrated DC chokes reduce harmonic distortion in the mains network, which increases the lifetime of the DC link capacitors and therefore the drive system's overall efficiency.

The solutions save cabinet space, as they are integrated in the drive from the factory. Efficient EMC mitigation also enables the use of cables with smaller cross-sections, which again reduces installation costs.

## Expand grid protection with filter solutions

If needed, Danfoss' wide range of solutions for harmonic mitigation can provide additional protection, such as the

- VLT® Advanced Harmonic Filter AHF
- VLT® Advanced Active Filter AAF
- VLT® Low Harmonic Drives
- 12-pulse VLT® drives

Provide motor protection with:

- VLT® Sine Wave Filter
- VLT® dU/dt Filter

With this solutions you may achieve optimum performance for your application, even in weak or unstable grids.

## Use motor cables up to 300 m

The design of the VLT® HVAC Drive makes it a perfect choice in applications that require long motor cables. Without needing additional components the drive provides trouble free operation with cable lengths of up to 150 m screened or 300 m unscreened. This allows the drive to be installed in a central control room a distance away from the application without affecting motor performance.



EMC Standards		Conducted emission		
Standards and requirements	EN 55011 Facility operators must comply with EN 55011	Class B Housing and light industries	Class A Group 1 Industrial environment	Class A Group 2 Industrial environment
	EN/IEC 61800-3 Converter manufacturers must conform to EN61800-3	Category C1 First environment, home and office	Category C2 First environment, home and office	Category C3 Second environment
FC 102 compliance <sup>1)</sup>		■	■	■

For further details see the VLT® HVAC Drive Design Guide

<sup>1)</sup>Compliance to mentioned EMC classes depends on the selected filter





# Increase safety

## Fire override mode

Activating the function "Fire-mode" within the VLT® drive ensures secure and continued operation within applications such as stair-well pressurisation, car park exhaust fans, smoke exhaust and essential service functions.

## Drive bypass


If a drive bypass is available the VLT® HVAC Drive will not only sacrifice itself; it will also bypass itself and connect the motor directly to mains. As a result fan functionality will be maintained after the drive fails, as long as there is power and the motor is functioning.  
(only available in the USA)

## Protect applications and operators

The VLT® HVAC Drive FC 102 is able to provide the STO (Safe Torque Off) function in compliance with ISO 13849-1 PL d and SIL 2, according to IEC 61508 / IEC 62061. In high demand

applications this can be expanded with the VLT® Safe Option MCB 140, an external module that provides functions such as Safe Stop 1 (SS1),

Safely Limited Speed (SLS) and Safe Maximum Speed (SMS), control of external contactors and safety door monitoring and unlocking.

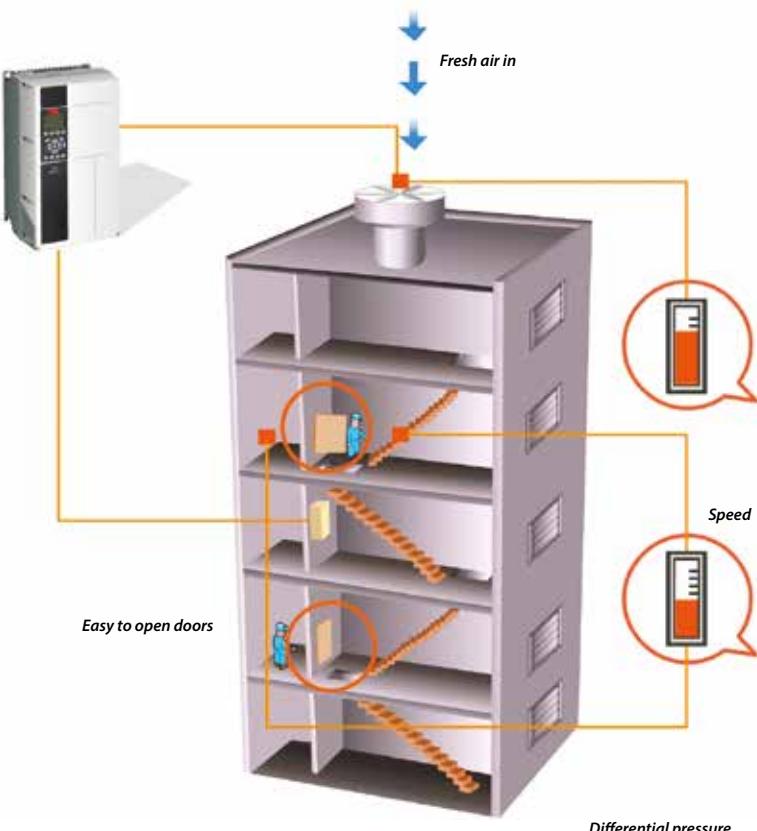



# Nine fieldbuses supported

## Increase productivity

With the wide range of fieldbus options the VLT® HVAC Drive can be easily connected to the fieldbus system of your choice. This makes the HVAC Drive a future-ready solution that can easily be expanded and updated if your needs change.

Danfoss fieldbus options can also be installed as a plug-and-play solution at a later stage, if the production layout demands a new communication platform. This way, you can be confident that you can optimize your plant without being forced to replace your existing drive system.

See the complete list of fieldbuses on page 24.

## BACnet Change of Value (COV)

The standard, passive, BACnet protocol that is embedded in every HVAC drive, can be expanded with the VLT® BACnet Option MCA 109 option.

This add-on enables the drive to support COV. As a result the drive will only communicate if pre-defined set-points are exceeded.

By effectively optimizing communication, the MCA 109 reduces the load on the fieldbus enabling more efficient building management.





# Energy documentation

**VLT® Energy Box software is the most modern and advanced energy calculation tool available.**

It allows energy consumption calculations and comparisons of HVAC fans, pumps and cooling tower applications driven by Danfoss drives and alternative methods of flow control.

The program compares the total operational costs of various traditional systems to operation of the same systems with a VLT® HVAC Drive.

With this program it is easy to evaluate the savings by comparing a VLT® HVAC Drive over other types of capacity control systems in both new installations as well as retrofit situations.

## Complete financial analysis

VLT® Energy Box provides a complete financial analysis including:

- Initial cost for the drive system and the alternative system
- Installation and hardware costs
- Annual maintenance costs and any utility company incentives for energy conservation products
- Payback time and accumulated savings
- Upload of actual energy consumption (kWh) and duty cycle from the VLT® HVAC Drive


VLT® Energy Box makes it possible to capture actual energy data from the drives and monitor energy consumption and overall system efficiency.

## Energy audit

The VLT® HVAC Drive coupled with Energy Box software enables the package to be used as the Energy Audit equipment for both the estimation and validation of savings.

VLT® HVAC Drive can be interrogated remotely for full energy data, making it easy to monitor your energy savings and return on investment. Monitoring via fieldbus often makes energy meters omission.

**Download VLT® Energy Box**  
[www.danfoss.com/energybox](http://www.danfoss.com/energybox)

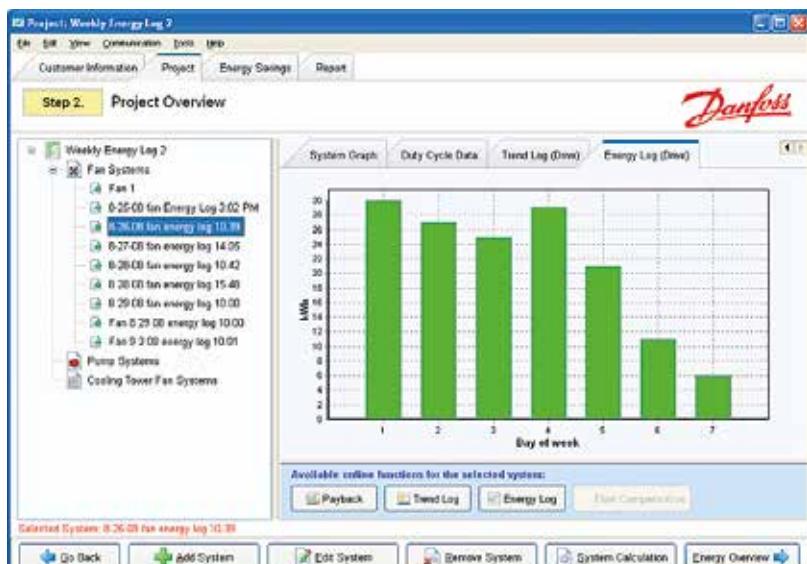



# Software tools

## Easy engineering and setup with VLT® Motion Control Tool MCT 10

In addition to operating the drive via LCP (local control panel), VLT® drives can also be configured and monitored with Danfoss own PC software. This provides plant managers with a comprehensive overview of the system at any point in time, adding a new level of flexibility in configuration, monitoring and troubleshooting.

MCT 10 is a windows based engineering tool with a clearly structured interface that provides an instant overview of all the drives in a system of any size. The software runs under Windows and enables data exchange over a traditional RS485 interface, fieldbus (Profibus, Ethernet, etc.) or via USB.

Parameter configuration is possible both online on a connected drive and offline in the tool itself. Additional documentation, such as electrical diagrams or operating manuals, can be embedded in MCT 10. This reduces the risk of incorrect configuration while offering fast access to troubleshooting.

## Analyse harmonic distortion with VLT® Harmonic Calculation Software HCS

This is an advanced simulation program that makes calculating harmonic distortion in your mains network fast and easy. It is the ideal solution both if you are planning to extend your

existing plant or installation or if you are planning a new installation from scratch.

The user-friendly interface allows you to configure the mains environment as desired and returns simulation results, which you can use to optimize your network.

Contact your local Danfoss sales office or visit our website for more information or visit directly at [www.danfoss-hcs.com](http://www.danfoss-hcs.com)

## VLT® Motion Control Tool MCT 31 Harmonics Calculation Software


VLT® MCT 31 calculates system harmonic distortion for both Danfoss and non-Danfoss drives. It is also able to calculate the effects of using various additional harmonic reduction

measures, including Danfoss harmonic filters.

With VLT® Motion Control Tool MCT 31, you can determine whether harmonics will be an issue in your installation, and if so, what strategies will be most cost-effective in addressing the problem.

VLT® Motion Control Tool MCT 31 features include:

- Short circuit current ratings can be used instead of transformer size and impedance when transformer data is unknown
- Project oriented for simplified calculations on several transformers
- Easy to compare different harmonic solutions within the same project
- Supports current Danfoss product line as well as legacy drive models

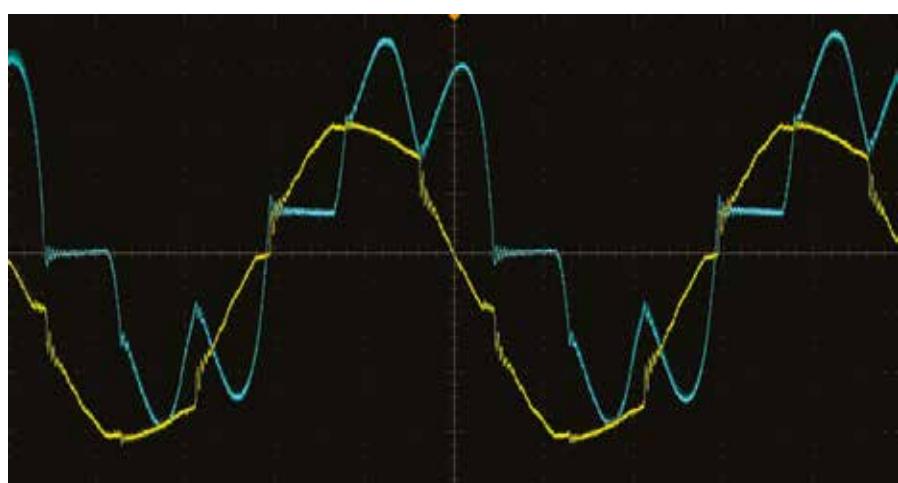




## Intuitive setup with graphical interface



The VLT® HVAC Drive features a user-friendly, hot pluggable local control panel (LCP) for easy setup and parameter configuration.

After choosing language navigate through setup parameters individually. Alternatively, use a pre-defined quick menu or a SmartStart guide for application specific setup.

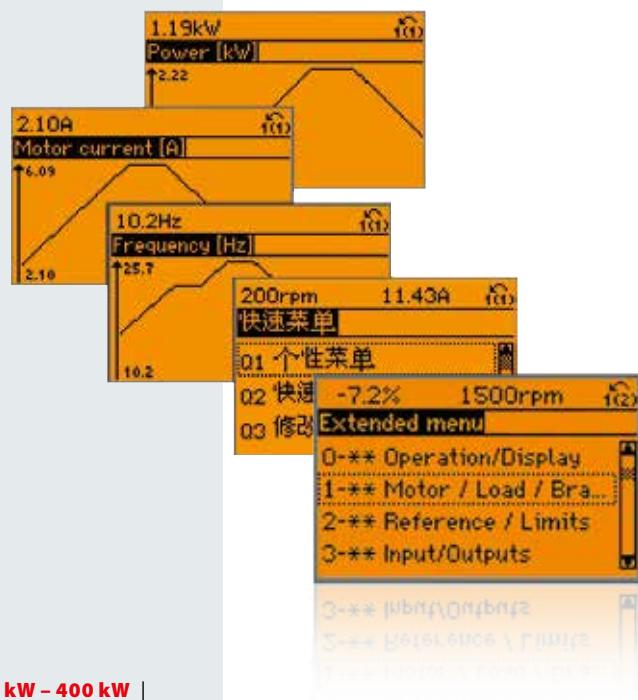



# Save commissioning time with SmartStart

SmartStart is a time-saving drive setup wizard that guides you through a series of easy steps to configure your drive. The wizard can be accessed with the drive's graphical control panel at the first power up of the drive or after a factory reset.

## Uses HVAC language


Using HVAC language, SmartStart asks you enter motor information and the application profile. The drive then calculates the optimal values to ensure reliable and energy efficient operation. When used with permanent magnet motors, which motor data may be based on a different value than 1000 RPM, SmartStart automatically recalculates the values to 1000 RPM.

## Intelligent optimization

SmartStart also asks if you want to apply the intelligent VLT features Automatic Motor Adaptation and Automatic Energy Optimization, enabling even more efficient motor control.

SmartStart is deactivated when the drive is programmed via fieldbus and after a timeout.

*NOTE: SmartStart is only accessible with the graphical control panel.*

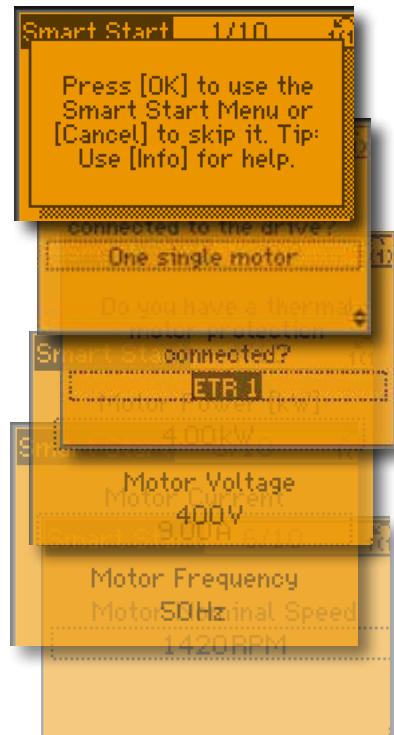



#### **Intelligent AHU functions**

The ability to handle logical rules and inputs from sensors, real-time functionality, and time-related actions enables the HVAC Drive to control a wide range of functions:

- Weekend and working day operations
- Cascaded P-PI for temperature control
- Multi-zone "3" control
- Flow balancing between fresh and outlet air
- Belt monitoring

# Dedicated fan features

The VLT® HVAC Drive offers a wide range of built-in and expandable functions that increase comfort and safety while reducing energy consumption.

## Velocity to flow conversion

The VLT® HVAC Drive is able to convert velocity pressure sensor values into flow values. This provides operators with the opportunity to set the drive up to provide a fixed flow or fixed differential flow. Regardless of method, the advantages are the same, as energy consumption is optimised while improving comfort. An added benefit is that this built-in setting eliminates the need for a flow sensor.

## Fire override mode

This safety feature prevents the drive from stopping to protect itself. Instead it will continue vital fan operation regardless of control signals, warnings or alarms.

## Extend BMS capacity

Easy integration into building management systems provides managers with detailed information about the current state of the infrastructure in the building. By integrating the drive into the building management network, all the I/O points in the drive are available as remote I/O to extend the capacity of the BMS.



For example: by installing room temperature sensors (PT 100/PT 1000) and monitoring them with the VLT® Sensor Input Card, the motor is protected from overheating in the bearings and windings. Monitoring of sensor temperature is either visible as a readout on the display or via fieldbus.

## Resonance monitoring

Avoid unwanted noise by setting the drive to avoid the frequency bands that cause fans to create resonances. Not only does this increase comfort, it also reduces wear on the equipment.

## Stairwell pressurisation

If there is a fire, the VLT HVAC Drive will continue to control the motor, even beyond its standard shutoff parameters. By maintaining a higher level of air in the stairwells than in other parts of the building, fire escapes remain smoke free.

## Smart logic reduces costs

The drive's built-in Smart Logic Controller and four auto-tuning PID controllers can control air handling functions with fans, valves and dampers. This reduces DDC tasks in the building management system and frees valuable data points for other use.



## Mains switch

The mains switch is a safety feature that makes it possible to cut off the drive from the mains supply. As a result maintenance and cleaning is both easy and safe. The mains switch option also reduces assembly costs.



# Dedicated pump features

The VLT® HVAC Drive is developed in close cooperation with OEMs, contractors, and manufacturers around the world. Each drive contains a wide range of built-in, dedicated features save energy in pump applications.

## Embedded pump controller

The Pump Cascade Controller distributes operation hours evenly across all pumps. Wear and tear on individual pumps is therefore reduced to a minimum, extending their lifetime expectancy and reliability considerably.

## Vital water supply

If a pipe leaks or breaks, the HVAC Drive can reduce the motor speed to prevent overload, while continuing to supply water at a lower speed.

## Sleep mode

In situations with low or no flow, the drive enters sleep mode to conserve energy. When the pressure falls below the pre-defined setpoint, the drive starts automatically. Compared to continuous operation this method reduces energy costs and equipment wear and tear, extending the lifetime of the application.

## 1. Dry Pump Protection and End of Curve

If the pump runs without creating the desired pressure, the drive sets off an alarm or performs another pre-programmed action. This happens for example when a well runs dry or a pipe leaks.

drive constantly adjusts the pressure reference to follow the system curve. This method both saves energy and reduces installation costs.





## 2. Auto tuning of PI controllers

Auto tuning enables the drive to monitor how the system reacts to corrections made by the drive constantly. The drive learns from it and calculates the P and I values, so precise and stable operation is restored quickly.

During operation, a pump normally consumes more power the faster it runs. In situations where the pump runs fast, but is not fully loaded, and does not consume adequate power, the drive compensates accordingly. This is a particular advantage when water circulation stops, the pump runs dry or when pipes leak.

## 3. Flow compensation

A pressure sensor mounted close to the fan or pump provides a reference point that enables pressure to be kept constant at the discharge end of the system. The

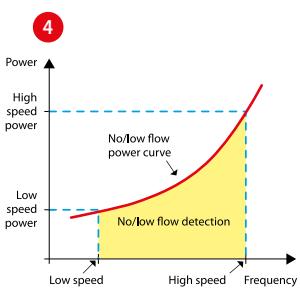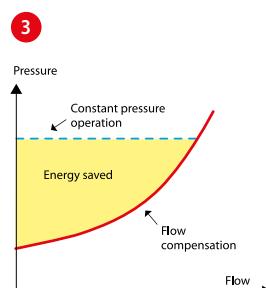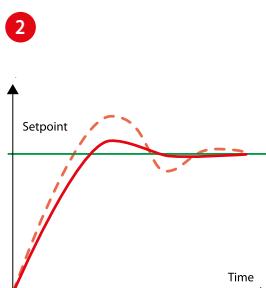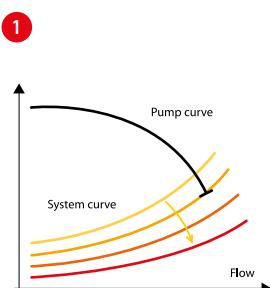

# Optimize system performance with EC+

Danfoss EC+ concept gives manufacturers of ventilation units the freedom to select their preferred motor from any supplier and control it with a VLT®

## Optimize PM motor performance

Danfoss has refined its VVC+ algorithm and optimised it for permanent magnet motors. This improvement makes it possible for owners to benefit from the high motor efficiency of EC technology. After entering the relevant motor data, the drive automatically optimizes the performance of the application.

## Free choice of technology

VLT® drives are equally efficient at controlling PM and asynchronous motors.

By providing vendors with the freedom to select the optimum combination of drive and motor, it is possible to offer the best possible system efficiency. This is a clear advantage compared to integrated systems, where it often is not possible to optimize the individual components.

## Easy maintenance

Component replacement as a result of wear and tear is not always possible without installing a complete new, integrated system. The EC+ concept answers this challenge by making service and maintenance easier, as only the affected component needs to be repaired/replaced in the event of malfunction.

Downtime is therefore reduced, and so are maintenance costs. These savings are the result of the fact that the EC+ concept is based on standardized components. All units can be shipped at short notice and installed with little effort.




EC motor with electronics being built into the fan impeller impacts the airflow through the impeller.

## EC motor + integrated electronics + fan

$\eta_{\text{Drive}} = 89\% | \eta_{\text{Fan}} = 66\% | \eta_{\text{System}} = 59\%$

Values related to ILK report

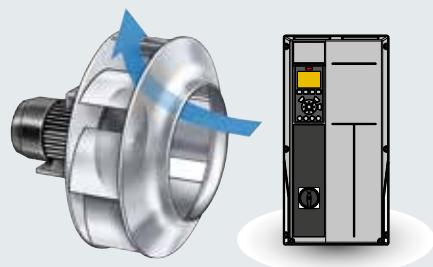


Plugfan with optimal and efficient airflow through the fan impeller.  
In combination with VSD and high efficient foot mounted permanent magnet motor.

## PM/EC motor + VSD + direct drive fan


$\eta_{\text{Drive}} = 89\% | \eta_{\text{Fan}} = 71\% | \eta_{\text{System}} = 63\%$

Values related to ILK report

## Highest efficiency with EC+

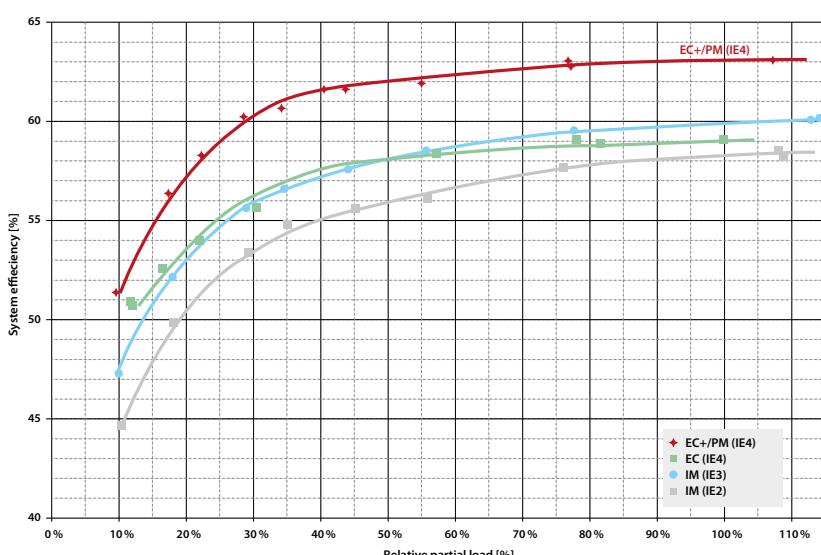

Tests at the Institute of Air Handling and Refrigeration (ILK) in Dresden have shown that the EC+ concept lowers the losses in ventilator systems by up to 10%, compared to conventional EC technology. This is the result of 3-5% higher system efficiency, depending on the nominal power size and the partial load.

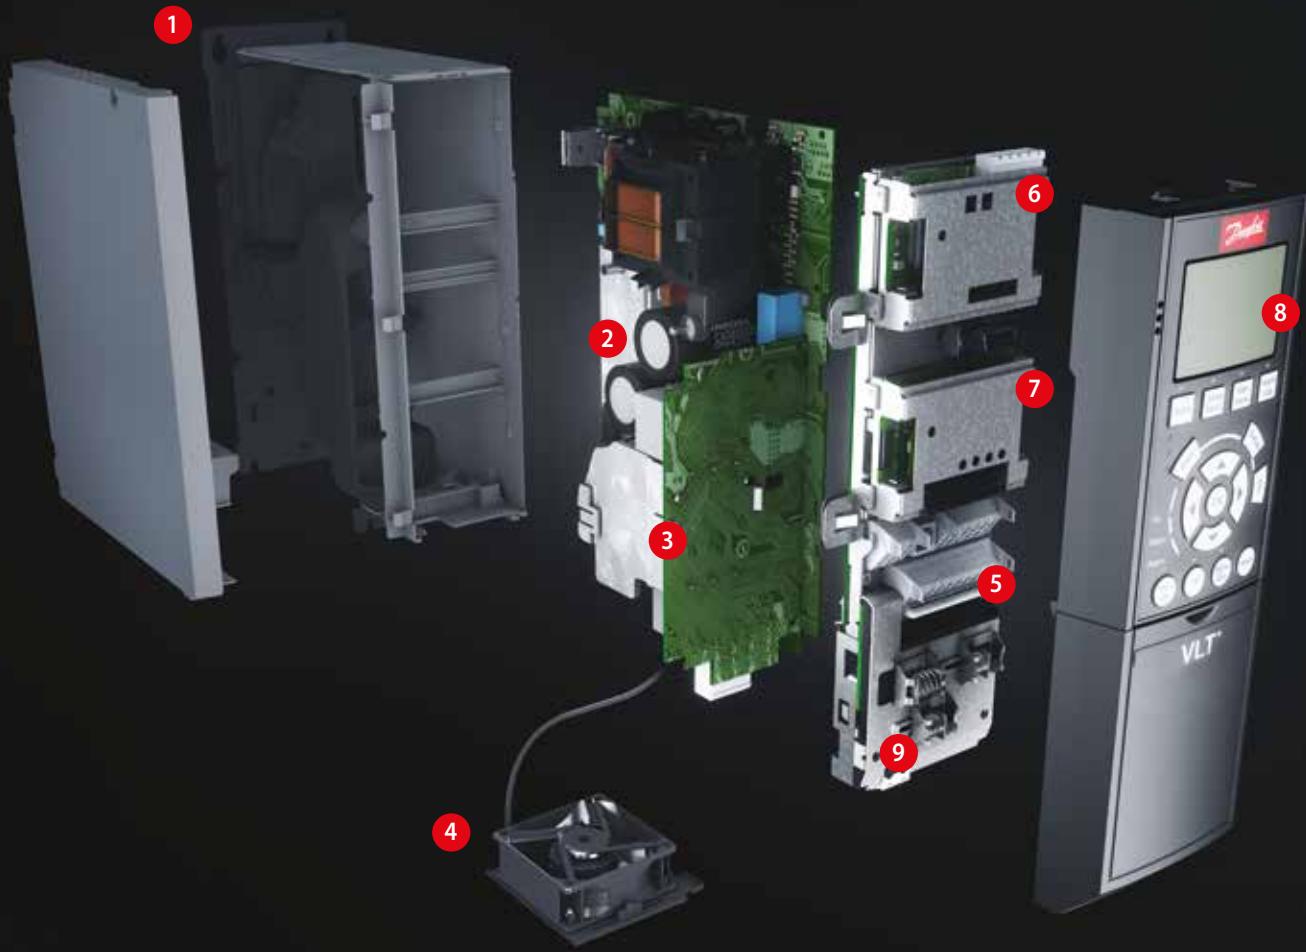

# Modular simplicity

**Delivered fully assembled and tested to meet your specific requirements**

## 1. Enclosure

The drive meets requirements for enclosure class IP 20/Chassis, IP 21/Type 1, IP 54/Type 12, IP 55/Type 12 or IP 66/Type 4X.

## 2. EMC and Network effects

All versions of VLT® HVAC Drive comply as standard with EMC limits B, A1 or A2 according to the EN 55011 norm. The standard integrated DC coils ensure low harmonic load on the network according to EN 61000-3-12 and increase the lifetime of the DC link capacitors.

## 3. Protective coating

The electronic components are, as standard, coated as per IEC60721-3-3, class 3C2. For harsh and aggressive environments, coating as per IEC60721-3-3, class 3C3 is available.

## 4. Removable fan

Like most of the elements, the fan can be quickly removed and remounted for easy cleaning.

## 5. Control terminals

Double-stack, spring-loaded cage clamps enhance reliability and facilitate easy commissioning and service.

## 6. Fieldbus option

See complete list of available fieldbus options on page 34.

## 7. I/O extensions

A wide range of I/O options are available either factory-mounted or as retrofit.

## 8. Display option

Danfoss VLT Drives' removable Local Control Panel is available with a variety of language packs: East European, West European, Asian and North American.

English and German are available in all drives.

Alternatively the drive can be commissioned via the built-in USB/RS485 connection or a fieldbus from with VLT® Motion Control Tool MCT 10 setup software.



### 9. 24 V external power supply

The external 24 V supply keeps the VLT® HVAC Drive logic "alive" when the AC mains is removed.

### 10. Mains disconnect

This switch interrupts the mains supply and has a free useable auxiliary contact.

### Safety

The VLT® HVAC Drive can optionally be delivered with the Safe Torque Off (Safe Stop) functionality suitable for category 3, performance level d according to EN 13849-1 and SIL 2 according to IEC 62061/IEC 61508. This feature prevents the drive from starting unintended.

### Built-in Smart Logic Controller

The Smart Logic Controller is a clever way to add customer-specific functionality to the drive and increase the opportunities for the drive, motor and application working together.

The controller monitors a specified event. When an event occurs, the controller performs a pre-defined action and then starts monitoring for the next pre-defined event. 20 steps of events and resulting actions are available before returning to the first set.

Logic functions can be selected; most of them run independently of the sequence control. This enables drives to monitor variables or signal defined events in an easy and flexible way independently of the motor control.



# The big picture


## An investment that pays

Increase application performance and streamline processes with energy efficient, adaptive motor control. Combine reliable, high performing solutions from a single supplier to reduce the lifetime costs of your applications.

### Minimize energy costs

As energy becomes increasingly expensive, variable speed control of electrical motors has proven to be one of the most effective cost-reducing measures available.

For example, by reducing the average speed of the motor from 100% to 80% in for example pumps or fans, 50% energy is saved. Reducing the average speed by 50% increases the savings to 80%.

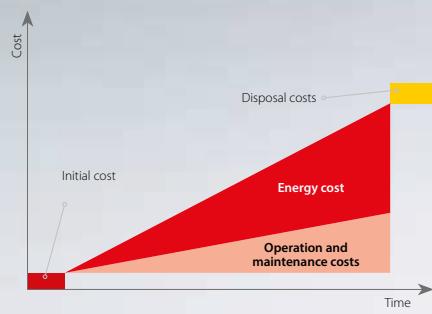


### Reduce total cost of ownership

Seen over its lifetime, the initial cost of a drive only amounts to 10% of the total cost of ownership; the remaining 90% cover energy consumption, service and maintenance.

During setup Automatic Motor Adaptation (AMA) and later during operation Automatic Energy Optimization (AEO) ensure that the drive is perfectly adapted to the attached motor and changing loads.

Once in operation VLT® drives serve reliably for their entire lifetime. Only requiring minimal maintenance, the VLT® HVAC Drives provide a fast return on investment and ultimately a competitive cost of ownership.

On the following pages we help you select the optimal VLT® for applications from 1.1 and 400 kW. For larger drives, please consult the selection guide for Danfoss VLT® High Power Drives.

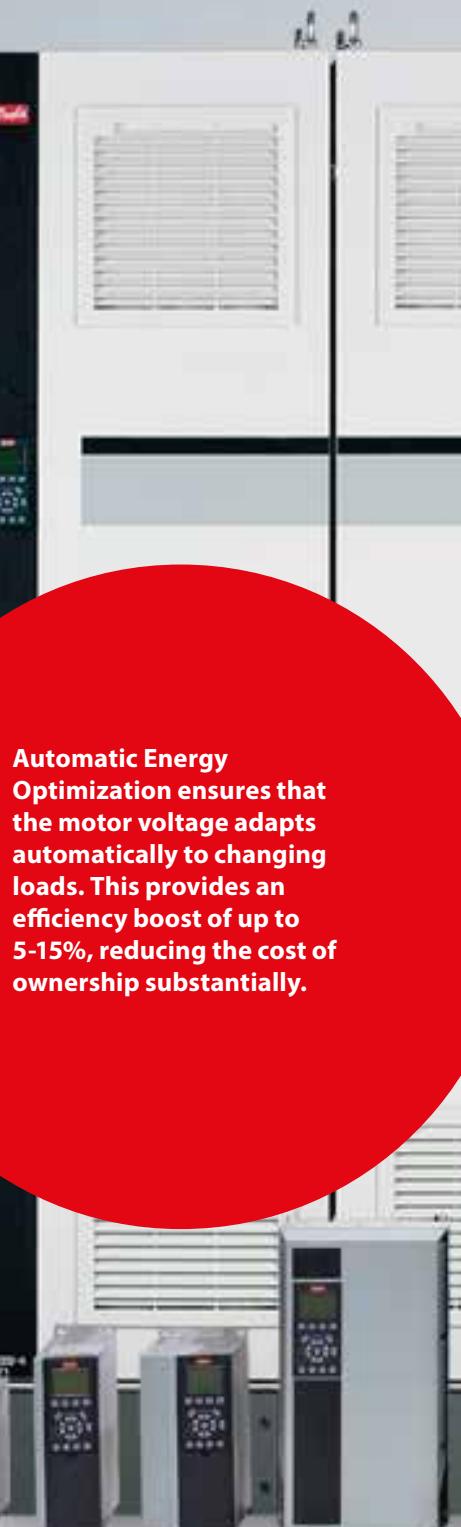

**Automatic Energy Optimization** ensures that the motor voltage adapts automatically to changing loads. This provides an efficiency boost of up to 5-15%, reducing the cost of ownership substantially.



# Specifications

Basic unit without extensions

<b>Main supply (L1, L2, L3)</b>	
Supply voltage	200 – 240 V $\pm 10\%$
Supply voltage	380 – 480 V $\pm 10\%$
Supply voltage	525 – 600 V $\pm 10\%$
Supply voltage	525 – 690 V $\pm 10\%$
Supply frequency	50/60 Hz
Displacement power factor ( $\cos \phi$ )	> 0.98 near unity
Switching on input supply L1, L2, L3	1–2 times/min.
Harmonic disturbance	Meets EN 61000-3-12
<b>Output data (U, V, W)</b>	
Output voltage	0 – 100% of supply voltage
Output frequency	0–590 Hz
Switching on output	Unlimited
Ramp times	1 – 3600 sec.
<b>Digital inputs</b>	
Programmable digital inputs	6*
Changeable to digital output	2 (terminal 27, 29)
Logic	PNP or NPN
Voltage level	0 – 24 V DC
Maximum voltage on input	28 V DC
Input resistance, $R_i$	Approx. 4 k $\Omega$
Scan interval	5 ms

\* 2 can be used as digital outputs

<b>Analog inputs</b>	
Analogue inputs	2
Modes	Voltage or current
Voltage level	0 to +10 V (scaleable)
Current level	0/4 to 20 mA (scaleable)
Accuracy of analog inputs	Max. error: 0.5% of full scale
<b>Pulse inputs</b>	
Programmable pulse inputs	2*
Voltage level	0 – 24 V DC (PNP positive logic)
Pulse input accuracy (0.1 – 1 kHz)	Max. error: 0.1% of full scale

\* Utilize some of the digital inputs

<b>Digital outputs</b>	
Programmable digital/pulse outputs	2
Voltage level at digital/frequency output	0 – 24 V DC
Max. output current (sink or source)	40 mA
Maximum output frequency at frequency output	0 to 32 kHz
Accuracy on frequency output	Max. error: 0.1% of full scale

<b>Analogue output</b>	
Programmable analogue outputs	1
Current range at analogue output	0/4 – 20 mA
Max. load to common at analogue output (clamp 39)	500 $\Omega$
Accuracy on analogue output	Max. error: 1% of full scale
<b>Control card</b>	
USB interface	1.1 (Full Speed)
USB plug	Type "B"
RS485 interface	Up to 115 kBaud
Max. load (10 V)	15 mA
Max. load (24 V)	200 mA
<b>Relay output</b>	
Programmable relay outputs	2
Max. terminal load (AC) on 1-3 (break), 1-2 (make), 4-6 (break) power card	240 V AC, 2 A
Max. terminal load (AC) on 4-5 (make) power card	400 V AC, 2 A
Min. terminal load on 1-3 (break), 1-2 (make), 4-6 (break), 4-5 (make) power card	24 V DC 10 mA, 24 V AC 20 mA
<b>Surroundings/external</b>	
Enclosure	IP: 00/20/21/54/55/66 UL Type: Chassis/1/12/4x Outdoor
Vibration test	1.0 g (D enclosures: 0.7 g)
Max. relative humidity	5% – 95% (IEC 721-3-3; Class 3K3 (non-condensing) during operation
Ambient temperature	Max. 50° C w/o derating
Galvanic isolation of all I/O supplies according to PELV	I/O supplies according to PELV
Aggressive environment	Designed for coated/standard 3C3/3C2 (IEC 60721-3-3)
<b>Fieldbus communication</b>	
Standard built-in:	Optional:
FC Protocol	VLT® PROFIBUS DP V1 MCA 101
N2 Metasys	VLT® DeviceNet MCA 104
FLN Apogee	VLT® LonWorks MCA 108
Modbus RTU	VLT® BACnet MCA 109
BACnet (embedded)	VLT® PROFINET MCA 120
	VLT® EtherNet/IP MCA 121
	VLT® Modbus TCP MCA 122
<b>Protection mode for longest possible up-time</b>	
– Electronic thermal motor protection against overload	
– Temperature monitoring of the heatsink ensures that the frequency converter trips if the temperature reaches 95° C $\pm 5^\circ$ C	
– The frequency converter is protected against short-circuits on motor terminals U, V, W	
– The frequency converter is protected against earth faults on motor terminals U, V, W	
– Protection against mains phase loss	




Global Marine



# Connection examples

The numbers represent the terminals on the drive

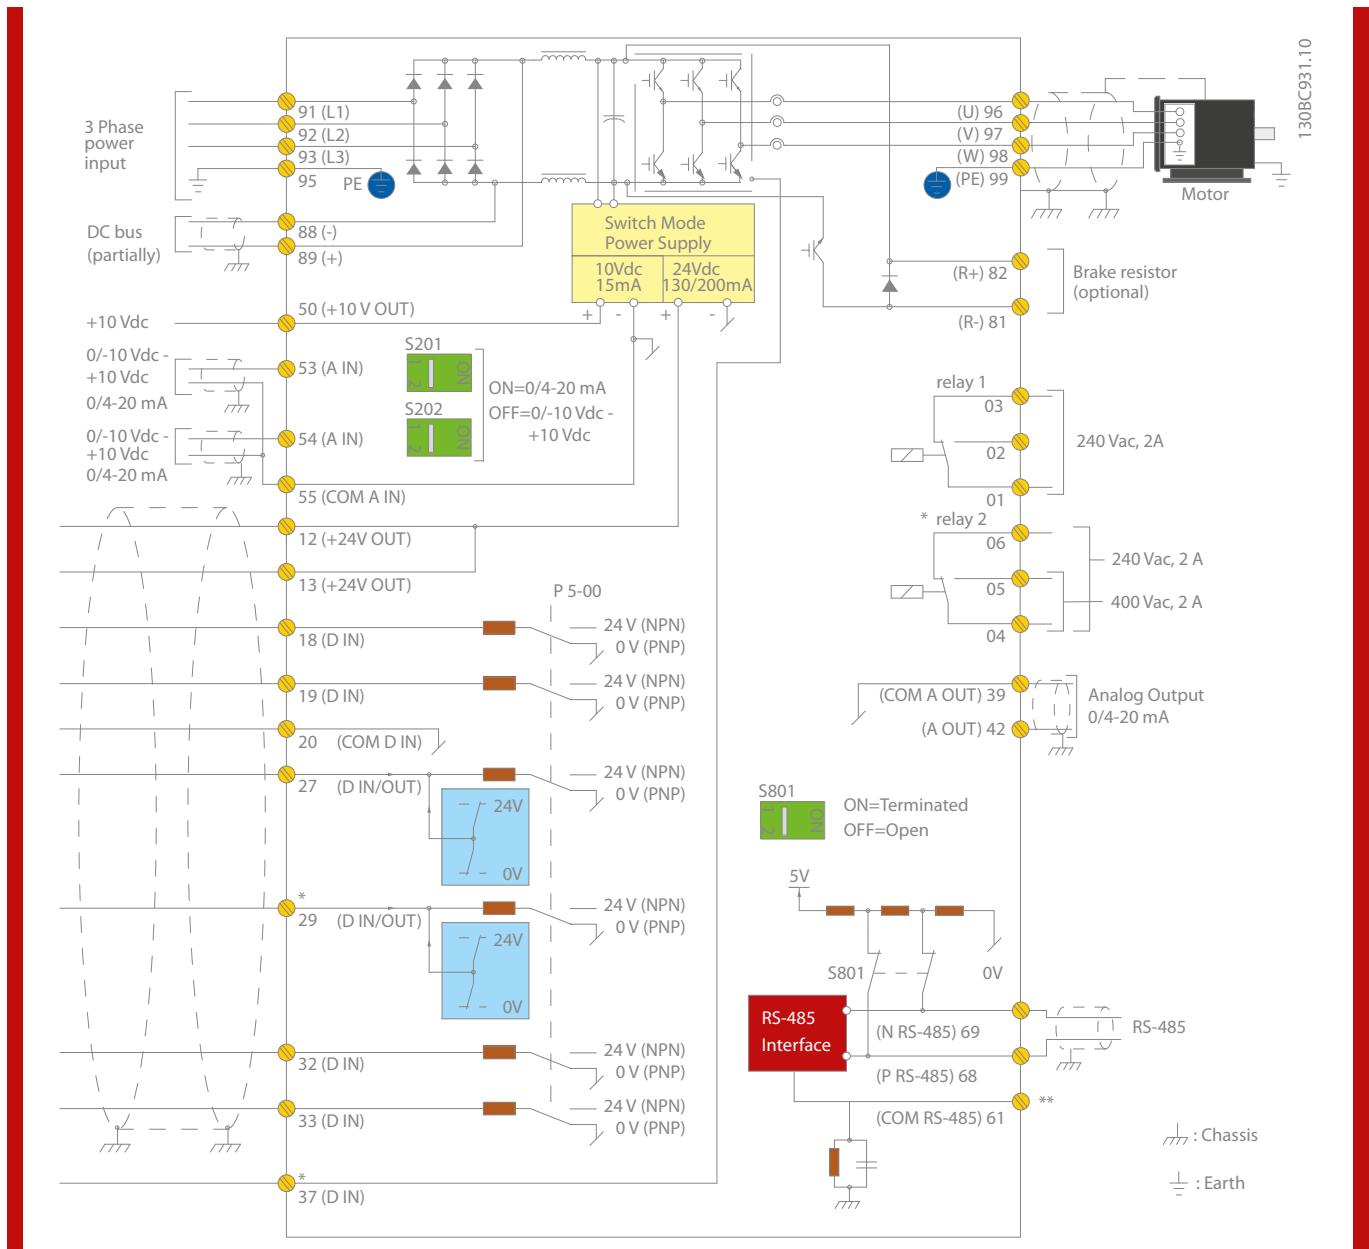

This diagram shows a typical installation of the VLT® HVAC Drive. Power is connected to the terminals 91 (L1), 92 (L2) and 93 (L3) and the motor is connected to 96 (U), 97 (V) and 98 (W).

Terminals 88 and 89 are used for load sharing between drives.

Analogue inputs can be connected to the 53 (V or mA), and for 54 (V or mA) terminals.

These inputs can be set up as either reference, feedback or thermistor inputs.

There are 6 digital inputs to be connected to terminals 18, 19, 27, 29, 32, and 33. Two digital input/output terminals (27 and 29) can be set up as digital outputs to show an actual status or warning. The terminal 42 analogue output can show process values such as 0 -  $I_{max}$ .

On the 68 (P+) and 69 (N-) terminals' RS 485 interface, the drive can be controlled and monitored via serial communication.

*Diagram showing all electrical terminals without options.*

*A = analogue, D = digital*

*Terminal 37 is used for Safe Stop. For instructions on Safe Stop installation please refer to the section Safe Stop Installation of the Design Guide.*

*\*Terminal 37 is optional.*

*\*\*Do not connect cable screen*

## VLT® HVAC Drive 200-240 V AC

Enclosure	IP 20 (IP 21*)/Chassis (Type 1)	A2			A3	
	IP 55 + IP 66/ Type 4X	A4 + A5		A5		
	P1K1	P1K5	P2K2	P3K0	P3K7	
Typical shaft output	[kW]	1.1	1.5	2.2	3	3.7
Typical shaft output at 208 V	[HP]	1.5	2.0	2.9	4.0	4.9
Output current						
Continuous (3 x 200 – 240 V)	[A]	6.6	7.5	10.6	12.5	16.7
Intermittent (3 x 200 – 240 V)	[A]	7.3	8.3	11.7	13.8	18.4
Output power						
Continuous (208 V AC)	[kVA]	2.38	2.70	3.82	4.50	6.00
Rated input current						
Continuous (3 x 200 – 240 V)	[A]	5.9	6.8	9.5	11.3	15.0
Intermittent (3 x 200 – 240 V)	[A]	6.5	7.5	10.5	12.4	16.5
Estimated power loss at rated max. load	[W]	63	82	116	155	185
Efficiency				0.96		
Max. cable size	[mm <sup>2</sup> ] ([AWG])			4 (12)		
Mains, motor, brake						
Max. pre-fuses	[A]		20			32
Weight						
IP 20	[kg]		4.9			6.6
IP 21	[kg]		5.5			7.5
IP 55, IP 66	[kg]	9.7 (A4)/13.5 (A2 + A5)				13.5

Enclosure	IP 20 (IP 21*)/Chassis (Type 1)	B3			B4		C3		C4	
	IP 21/Type 1, IP 55 + IP 66//Type 4X	B1			B2	C1		C2		
		P5K5	P7K5	P11K	P15K	P18K	P22K	P30K	P37K	P45K
Typical shaft output	[kW]	5.5	7.5	11	15	18.5	22	30	37	45
Typical shaft output at 208 V	[HP]	7.5	10	15	20	25	30	40	50	60
Output current										
Continuous (3 x 200 – 240 V)	[A]	24.2	30.8	46.2	59.4	74.8	88	115	143	170
Intermittent (3 x 200 – 240 V)	[A]	26.6	33.9	50.8	65.3	82.3	96.8	127	157	187
Output power										
Continuous (208 V AC)	[kVA]	8.7	11.1	16.6	21.4	26.9	31.7	41.4	51.5	61.2
Rated input current										
Continuous (3 x 200 – 240 V)	[A]	22	28	42	54	68	80	104	130	154
Intermittent (3 x 200 – 240 V)	[A]	24.2	30.8	46.2	59.4	74.8	88	114	143	169
Estimated power loss at rated max. load	[W]	269	310	447	602	737	845	1140	1353	1636
Efficiency				0.96				0.97		
Max. cable size	[mm <sup>2</sup> ] ([AWG])		10 (7)		35 (2)		50 (1) (B4 = 35 (2))		150 (300 MCM)	150 (300 MCM)
Mains, motor, brake										
Max. cable size mains	[mm <sup>2</sup> ] ([AWG])		16 (6)		35 (2)		50, 35, 35 (1, 2, 2)		95, 70, 70 (3/0, 2/0, 2/0)	185, 150, 120 (350 MCM, 300 MCM, 4/0)
With mains disconnect switch included										
Max. pre-fuses	[A]		63		80		125		160	200
Weight										
IP 20	[kg]		12		23.5		35			50
IP 21, IP 55, IP 66	[kg]		23		27		45			65

\* (A2, A3, B3, B4, C3 and C4 may be converted to IP 21/Type 1 using a conversion kit.  
(Please see also items mechanical mounting in Operating Instructions and IP 21/Type 1 enclosure kit in the Design Guide.)

# VLT® HVAC Drive 380 – 480 V AC

Enclosure	IP 20 (IP 21*)/Chassis (Type 1)	A2					A3	
	IP 55 + IP 66 / Type 4X	A4 + A5			A5			
	P1K1	P1K5	P2K2	P3K0	P4K0	P5K5	P7K5	
Typical shaft output	[kW]	1.1	1.5	2.2	3	4	5.5	7.5
Typical shaft output at 460 V	[HP]	1.5	2.0	2.9	4.0	5.0	7.5	10
Output current								
Continuous (3 x 380 – 440 V)	[A]	3	4.1	5.6	7.2	10	13	16
Intermittent (3 x 380 – 440 V)	[A]	3.3	4.5	6.2	7.9	11	14.3	17.6
Continuous (3 x 441 – 480 V)	[A]	2.7	3.4	4.8	6.3	8.2	11	14.5
Intermittent (3 x 441 – 480 V)	[A]	3.0	3.7	5.3	6.9	9.0	12.1	15.4
Output power								
Continuous (400 V AC)	[kVA]	2.1	2.8	3.9	5.0	6.9	9.0	11.0
Continuous (460 V AC)	[kVA]	2.4	2.7	3.8	5.0	6.5	8.8	11.6
Rated input current								
Continuous (3 x 380 – 440 V)	[A]	2.7	3.7	5.0	6.5	9.0	11.7	14.4
Intermittent (3 x 380 – 440 V)	[A]	3.0	4.1	5.5	7.2	9.9	12.9	15.8
Continuous (3 x 441 – 480 V)	[A]	2.7	3.1	4.3	5.7	7.4	9.9	13.0
Intermittent (3 x 441 – 480 V)	[A]	3.0	3.4	4.7	6.3	8.1	10.9	14.3
Estimated power loss at rated max. load	[W]	58	62	88	116	124	187	255
Efficiency		0.96			0.97			
Max. cable size (Mains, motor, brake)	[mm <sup>2</sup> ] ([AWG])					4 (12)		
Max. pre-fuses	[A]	10			20			32
Weight								
IP 20	[kg]	4.8		4.9				6.6
IP 55, IP 66	[kg]			9.7 (A4)/13.5 (A2 + A5)				14.2

Enclosure	IP 20 (IP 21*)/Chassis (Type 1)	B3			B4			C3		C4	
	IP 21/Type 1, IP 55 + IP 66/Type 4X	B1			B2			C1		C2	
		P11K	P15K	P18K	P22K	P30K	P37K	P45K	P55K	P75K	P90K
Typical shaft output	[kW]	11	15	18.5	22	30	37	45	55	75	90
Typical shaft output at 460 V	[HP]	15	20	25	30	40	50	60	75	100	125
Output current											
Continuous (3 x 380 – 439 V)	[A]	24	32	37.5	44	61	73	90	106	147	177
Intermittent (3 x 380 – 439 V)	[A]	26.4	35.2	41.3	48.4	67.1	80.3	99	117	162	195
Continuous (3 x 440 – 480 V)	[A]	21	27	34	40	52	65	80	105	130	160
Intermittent (3 x 440 – 480 V)	[A]	23.1	29.7	37.4	44	61.6	71.5	88	116	143	176
Output power											
Continuous (400 V AC)	[kVA]	16.6	22.2	26	30.5	42.3	50.6	62.4	73.4	102	123
Continuous (460 V AC)	[kVA]	16.7	21.5	27.1	31.9	41.4	51.8	63.7	83.7	104	128
Rated input current											
Continuous (3 x 380 – 439 V)	[A]	22	29	34	40	55	66	82	96	133	161
Intermittent (3 x 380 – 439 V)	[A]	24.2	31.9	37.4	44	60.5	72.6	90.2	106	146	177
Continuous (3 x 440 – 480 V)	[A]	19	25	31	36	47	59	73	95	118	145
Intermittent (3 x 440 – 480 V)	[A]	20.9	27.5	34.1	39.6	51.7	64.9	80.3	105	130	160
Estimated power loss at rated max. load	[W]	278	392	465	525	698	739	843	1083	1384	1474
Efficiency						0.98					0.99
Max. cable size (Mains, motor, brake)	[mm <sup>2</sup> ] ([AWG])		10 (8)		35 (2)		50 (1) (B4 = 35 (2))		95 (4/0)	95 (4/0)	
Max. cable size mains With mains disconnect switch included	[mm <sup>2</sup> ] ([AWG])		16, 10, 10 (6, 8, 8)				50, 35, 35 (1, 2, 2)		95, 70, 70 (3/0, 2/0, 2/0)	185, 150, 120 (350 MCM, 300 MCM, 4/0)	
Max. pre-fuses	[A]	63	63	63	63	80	100	125	160	250	250
Weight											
IP 20	[kg]	12	12	12	23.5	23.5	23.5	35	35	50	50
IP 21, IP 55, IP 66	[kg]	23	23	23	27	27	45	45	45	65	65

\* (A2, A3, B3, B4, C3 and C4 may be converted to IP 21 using a conversion kit. Please contact Danfoss.  
(Please see also items Mechanical mounting in Operating Instructions and IP 21/Type 1 Enclosure kit in the Design Guide.)

1) With brake and load sharing 95 (4/0)

## VLT® HVAC Drive 3 x 380 – 480 V AC

Enclosure	IP 20		D3h				D4h			
	IP 21, IP 55		D1h + D5h + D6h				D2h + D7h + D8h			
	N110	N132	N160	N200	N250	N315				
Typical shaft output (400 V)	[kW]		110	132	160	200	250	315		
Typical shaft output (460 V)	[HP]		150	200	250	300	350	450		
Typical shaft output (480 V)	[kW]		132	160	200	250	315	355		
Output current										
Continuous (400 V)	[A]		212	260	315	395	480	588		
Intermittent (440 V)	[A]		233	286	347	435	528	647		
Continuous (460/500 V)	[A]		190	240	302	361	443	535		
Intermittent (460/500 V)	[kVA]		209	264	332	397	487	588		
Output power										
Continuous (400 V)	[kVA]		147	180	218	274	333	407		
Continuous (460 V)	[kVA]		151	191	241	288	353	426		
Rated input current										
Continuous (400 V)	[A]		204	251	304	381	463	567		
Intermittent (460/500 V)	[A]		183	231	291	348	427	516		
Estimated power loss at rated maximum load at 460 V	[W]		2555	2949	3764	4109	5129	6663		
Efficiency					0.98					
Max. cable size Mains, motor, brake and loadsharing	[mm <sup>2</sup> ] ([AWG])		2 x 95 (2 x 3/0)				2 x 185 (2 x 350 mcm)			
Max. external input (mains) fuses	[A]		315	350	400	550	630	800		
Weight										
IP 20, IP 21, IP 54	[kg]		62 (D1h + D3h) 166 (D5h), 129 (D6h)				125 (D2h + D4h) 200 (D7h), 225 (D8h)			

## VLT® HVAC Drive 525 – 600 V AC


Enclosure																		
	IP 20 Chassis		A3				A3				B3		B4		C3		C4	
			A5				B1		B2		C1		C2					
	P1K1	P1K5	P2K2	P3K0	P4K0	P5K5	P7K5	P11K	P15K	P18K	P22K	P30K	P37K	P45K	P55K	P75K	P90K	
Typical shaft output	[kW]	1.1	1.5	2.2	3	4	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90
Output current																		
Continuous (3 x 525 – 550 V)	[A]	2.6	2.9	4.1	5.2	6.4	9.5	11.5	19	23	28	36	43	54	65	87	105	137
Intermittent (3 x 525 – 550 V)	[A]	2.9	3.2	4.5	5.7	7.0	10.5	12.7	21	25	31	40	47	59	72	96	116	151
Continuous (3 x 525 – 600 V)	[A]	2.4	2.7	3.9	4.9	6.1	9.0	11.0	18	22	27	34	41	52	62	83	100	131
Intermittent (3 x 525 – 600 V)	[A]	2.6	3.0	4.3	5.4	6.7	9.9	12.1	20	24	30	37	45	57	68	91	110	144
Output power																		
Continuous (525 V AC)	[kVA]	2.5	2.8	3.9	5.0	6.1	9.0	11.0	18.1	21.9	26.7	34.3	41	51.4	61.9	82.9	100	130.5
Continuous (575 V AC)	[kVA]	2.4	2.7	3.9	4.9	6.1	9.0	11.0	17.9	21.9	26.9	33.9	40.8	51.8	61.7	82.7	99.6	130.5
Rated input current																		
Continuous (3 x 525-600 V)	[A]	2.4	2.7	4.1	5.2	5.8	8.6	10.4	17.2	20.9	25.4	32.7	39	49	59	78.9	95.3	124.3
Intermittent (3 x 525 – 600 V)	[A]	2.7	3.0	4.5	5.7	6.4	9.5	11.5	19	23	28	36	43	54	65	87	105	137
Estimated power loss at rated max. load	[W]	50	65	92	122	145	195	261	300	400	475	525	700	750	850	1100	1400	1500
Efficiency		0.97	0.97	0.97	0.97	0.97	0.97	0.97	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	0.98	
Max. cable size IP 20, mains, motor, brake	[mm <sup>2</sup> ] ([AWG])	4 (12)				10 (8)				35 (2)		50 (1/0)		95 (4/0)	120 (250 MCM)			
Max. cable size IP 21/55/66, mains, motor, brake	[mm <sup>2</sup> ] ([AWG])	4 (12)				10 (8)				35, 25, 25 (2, 4, 4)		50 (1)		150 (300 MCM)				
Max. cable size mains With mains disconnect switch included	[mm <sup>2</sup> ] ([AWG])	4 (12)				16, 10, 10 (8, 8, 8)				50, 35, 35 (1, 2, 2)		95, 70, 70 (3/0, 2/0, 2/0)		185, 120 (350 MCM, 300 MCM, 4/0)				
Max. pre-fuses	[A]	10	10	20	20	20	32	32	63	63	63	80	100	125	160	250	250	
Weight																		
IP 20	[kg]	6.5	6.5	6.5	6.5	6.5	6.6	6.6	12	12	12	23.5	23.5	35	35	50	50	
IP 21, IP 55, IP 66	[kg]	13.5	13.5	13.5	13.5	13.5	14.2	14.2	23	23	23	27	27	45	45	65	65	

## VLT® HVAC Drive 3 x 525-690 V AC



Enclosure	IP 20		A3							B4						C3		D3h	
	IP 21/IP 55									B2				C2					
	P1K1	P1K5	P2K2	P3K0	P4K0	P5K5	P7K5	P11K	P15K	P18K5	P22K	P30K	P37K	P45K	P55K	P75K	P90K		
Typical shaft output (690 V)	[kW]	1.1	1.5	2.2	3	4	5.5	7.5	11	15	18.5	22	30	37	45	55	75	90	
Output current (High overload 110% for 1 min.)																			
Continuous (3 x 525-550 V)	[A]	2.1	2.7	3.9	4.9	6.1	9	11	14	19	23	28	36	43	54	65	87	105	
Intermittent (3 x 525-550 V)	[A]	3.4	4.3	6.2	7.8	9.8	14.4	17.6	22.4	20.9	25.3	30.8	39.6	47.3	59.4	71.5	95.7	115.5	
Continuous kVA (3 x 551-690 V)	[A]	1.6	2.2	3.2	4.5	5.5	7.5	10	13	18	22	27	34	41	52	62	83	100	
Intermittent kVA (3 x 551-690 V)	[A]	2.6	3.5	5.1	7.2	8.8	12	16	20.8	19.8	24.2	29.7	37.4	45.1	57.2	68.2	91.3	110	
Output power																			
Continuous (550 V) (A3 525 V)	[kVA]	1.9	2.5	3.5	4.5	5.5	8.2	10	13.3	18.1	21.9	26.7	34.3	41.0	51.4	61.9	82.9	100	
Continuous (690 V)	[kVA]	1.9	2.6	3.8	5.4	6.6	9	12	15.5	21.5	26.3	32.3	40.6	49.0	62.1	74.1	99.2	119.5	
Rated input current																			
Continuous (3 x 525-550 V)	[A]	1.9	2.4	3.5	4.4	5.5	8	10	15	19.5	24	29	36	49	59	71	87	99	
Intermittent (3 x 525-550 V)	[A]	3	3.9	5.6	7.1	8.8	13	16	23.2	21.5	26.4	31.9	39.6	53.9	64.9	78.1	95.7	108.9	
Continuous kVA (3 x 551-690 V)	[A]	1.4	2	2.9	4	4.9	6.7	9	14.5	19.5	24	29	36	48	58	70	86	94.3	
Intermittent kVA (3 x 551-690 V)	[A]	2.3	3.2	4.6	6.5	7.9	10.8	14.4	23.2	21.5	26.4	31.9	39.6	52.8	63.8	77	94.6	112.7	
Estimated power loss at rated maximum load	[W]	44	60	88	120	160	220	300	150	220	300	370	440	740	900	1100	1500	1800	
Efficiency		0.96							0.98										
Max. cable cross section Mains, motor, brake and load sharing	[mm <sup>2</sup> ] ([AWG])	4 (12)							35 (2)										
Max. external input (mains) fuses	[A]	–							63	80	100	125	160				–		
Weight																			
IP 20	[kg]	6.6							21.5 (B4)						35 (C3)	62 (D3h)			
IP 21, IP 55	[kg]	–							27 (B2)						65 (C2) – 62 (D3h)				

Enclosure	IP 20		D3h					D4h										
	IP 21, IP 55		D1h + D5h + D6h					D2h + D7h + D8h										
	N75K	N90K	N110	N132	N160	N200	N250	N315	N400									
Typical shaft output (525 V)	[kW]	55	75	90	110	132	160	200	250	315								
Typical shaft output (575 V)	[HP]	75	100	125	150	200	250	300	350	400								
Typical shaft output (690 V)	[kW]	75	90	110	132	160	200	250	315	400								
Output current																		
Continuous (550 V)	[A]	90	113	137	162	201	253	303	360	418								
Intermittent (550 V)	[A]	99	124	151	178	221	278	333	396	460								
Continuous (575/690 V)	[A]	86	108	131	155	192	242	290	344	400								
Intermittent (575/690 V)	[kVA]	95	119	144	171	211	266	319	378	440								
Output power																		
Continuous (525 V)	[kVA]	86	108	131	154	191	241	289	343	398								
Continuous (575 V)	[kVA]	86	108	130	154	191	241	289	343	398								
Continuous (690 V)	[kVA]	103	129	157	185	229	289	347	411	478								
Rated input current																		
Continuous (550 V)	[A]	89	110	130	158	198	245	299	355	408								
Continuous (575 V)	[A]	85	106	124	151	189	234	286	339	390								
Continuous (690 V)	[A]	87	109	128	155	197	240	296	352	400								
Estimated power loss at 525/575 V	[W]	1162	1428	1739	2099	2646	3071	3719	4460	5023								
Estimated power loss at 690 V	[W]	1204	1477	1796	2165	2738	3172	3848	4610	5150								
Efficiency		0.98							2 x 185 (2 x 350 mcm)									
Max. cable size Mains, motor, brake and loadsharing	[mm <sup>2</sup> ] ([AWG])	2 x 95 (2 x 3/0)							2 x 185 (2 x 350 mcm)									
Max. external input (mains) fuses	[A]	160	315					350				400	500	550				
Weight																		
IP 20, IP 21, IP 54	[kg]	62 (D1h + D3h) 166 (D5h), 129 (D6h)							125 (D2h + D4h) 200 (D7h), 225 (D8h)									



# Dimensions and air flow





A2 IP 20

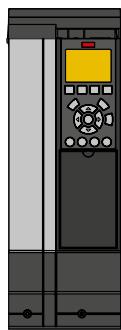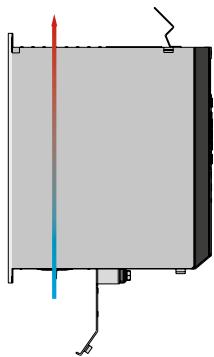



A3 with IP 21/Type 12 NEMA 1 Kit

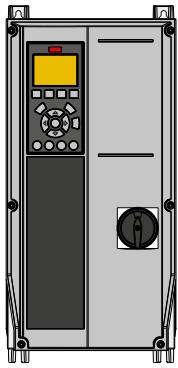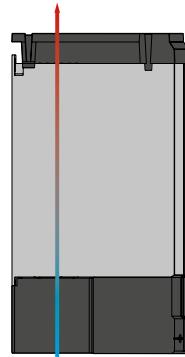



A4 IP 55 with mains disconnect

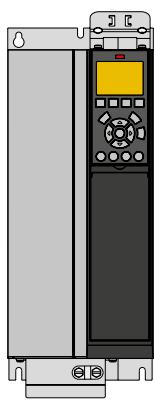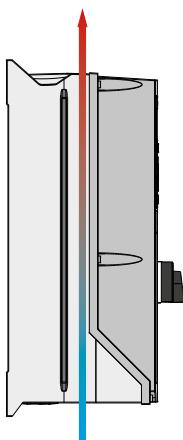


B3 IP 20

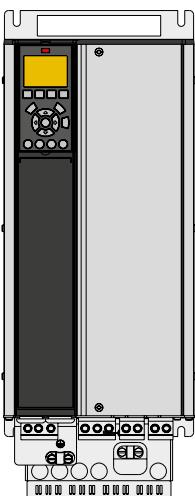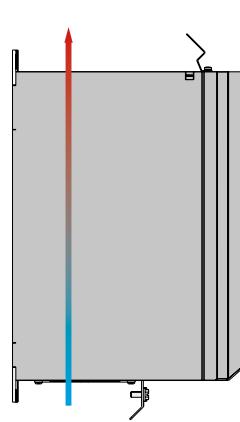

B4 IP 20

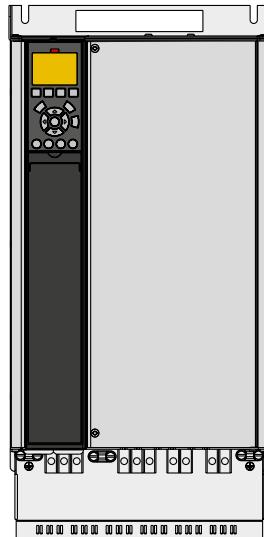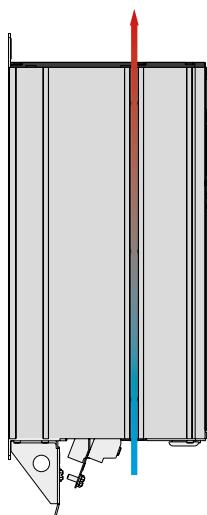

C3 IP 20

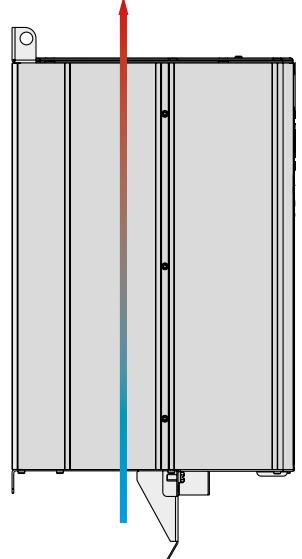


Please see the VLT® HVAC Drive FC 102 Design Guide for other frames, available at <http://www.danfoss.com/Products/Literature/VLT+Technical+Documentation.htm>


## A, B and C frames

VLT® HVAC Drive														
Frame	A2		A3		A4	A5	B1	B2	B3	B4	C1	C2	C3	C4
Enclosure	IP 20	IP 21	IP 20	IP 21	IP 55/IP 66		IP 21/IP 55/ IP 66		IP 20		IP 21/IP 55/ IP 66		IP 20	
<b>H mm</b> Height of back plate	268	375	268	375	390	420	480	650	399	520	680	770	550	660
<b>H1 mm</b> With de-coupling plate for fieldbus cables	374	–	374	–	–	–	–	–	420	595	–	–	630	800
<b>H2 mm</b> Distance to mounting holes	254	350	257	350	401	402	454	624	380	495	648	739	521	631
<b>W mm</b>	90	90	130	130	200	242	242	242	165	230	308	370	308	370
<b>W1 mm</b> Distance between mounting holes	70	70	110	110	171	215	210	210	140	200	272	334	270	330
<b>D mm</b> Depth without option A/B	205	207	205	207	175	195	260	260	249	242	310	335	333	333
<b>D1 mm</b> With mains disconnect	–	–	–	–	206	224	289	290	–	–	344	378	–	–
<b>D2 mm</b> With option A/B	220	222	220	222	175	195	260	260	262	242	310	335	333	333
<b>Air cooling</b>	I (air space inlet) mm (inches)	100	100	100	100	100	200	200	200	200	225	200	225	225
	O (air space outlet) mm (inches)	100	100	100	100	100	200	200	200	200	225	200	225	225
<b>Weight (kg)</b>	4.9	5.3	6.6	7	9.7	13.5/ 14.2	23	27	12	23.5	45	65	35	50






A3 IP 20

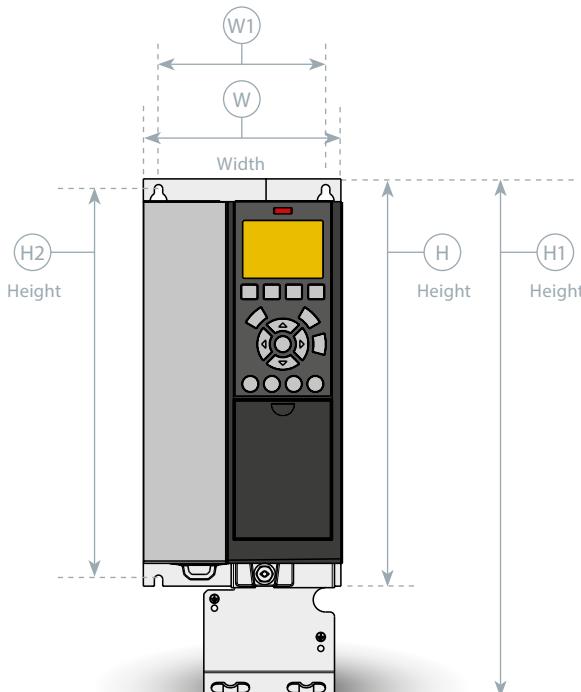

A4 IP 55 with mains disconnect

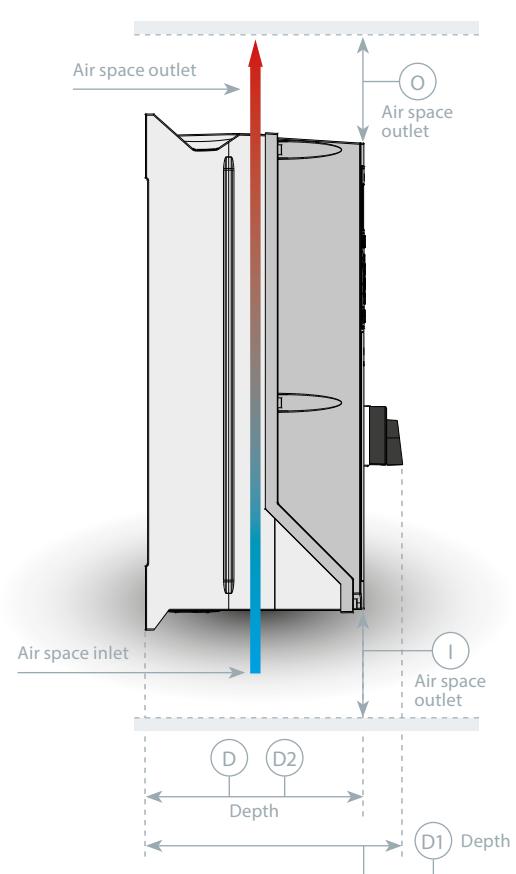


# Dimensions and air flow

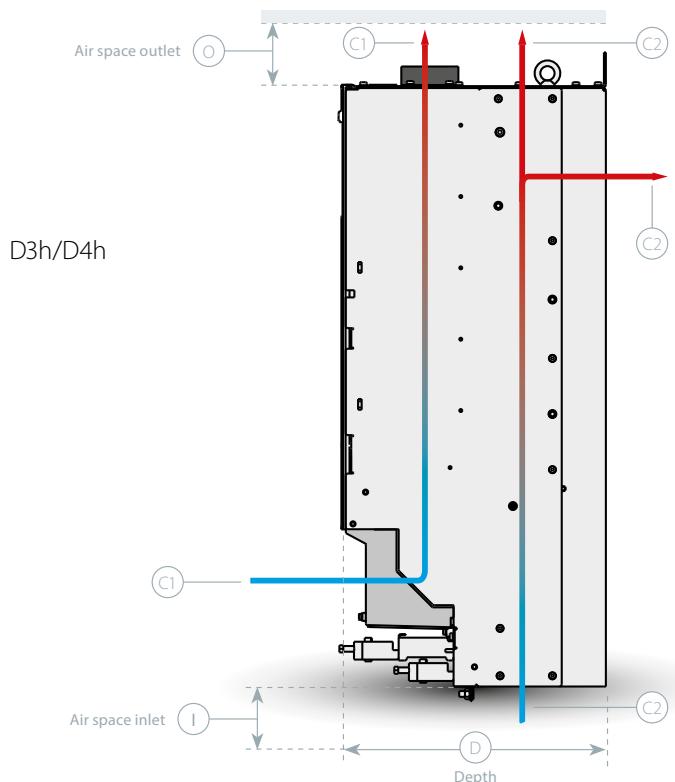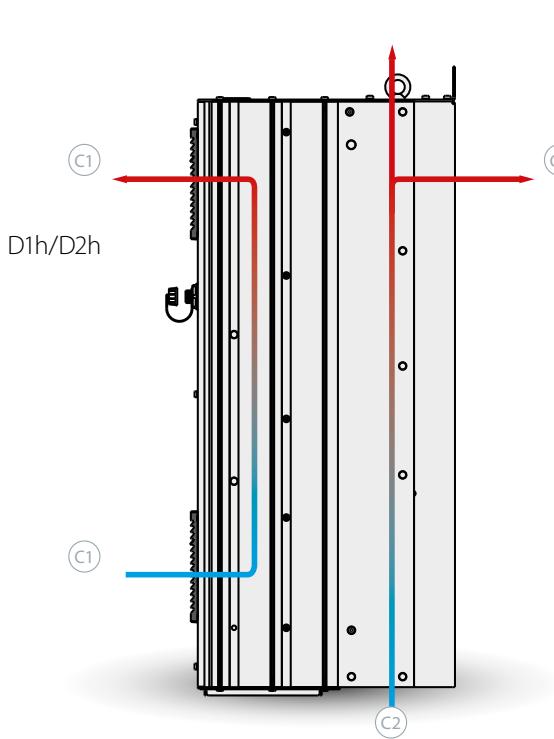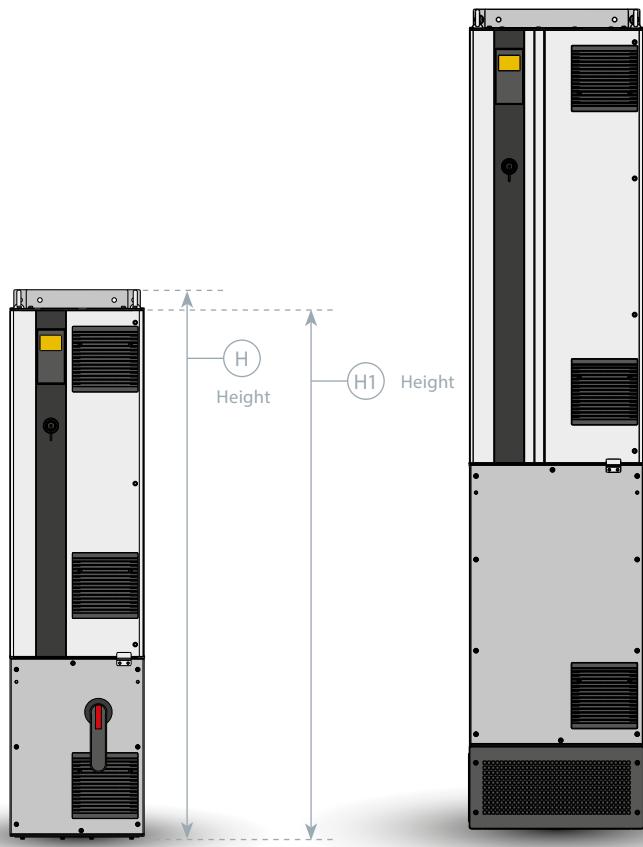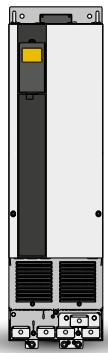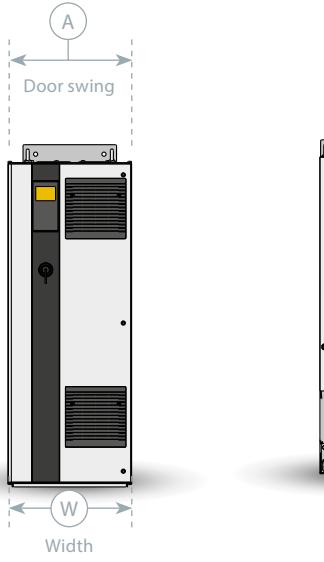

Please see the VLT® High Power Design Guide for other frames, available at <http://www.danfoss.com/Products/Literature/VLT+Technical+Documentation.htm>

## D frames

VLT® HVAC Drive								
Frame	D1h	D2h	D3h	D4h	D5h	D6h	D7h	D8h
Enclosure	IP 21/IP 54		IP 20		IP 21/IP 54			
<b>H mm</b> Height of back plate	901	1107	909	1122	1324	1665	1978	2284
<b>H1 mm</b> Height of product	844	1050	844	1050	1277	1617	1931	2236
<b>W mm</b>	325	420	250	350	325	325	420	420
<b>D mm</b>	378	378	375	375	381	381	384	402
<b>D1 mm</b> With mains disconnect	-	-	-	-	426	426	429	447
<b>Door swing A mm</b>	298	395	n/a	n/a	298	298	395	395
<b>Air cooling</b>	<b>I (air space inlet) mm</b>	225	225	225	225	225	225	225
	<b>O (air space outlet) mm</b>	225	225	225	225	225	225	225
	<b>C1</b>	102 m³/h (60 cfm)	204 m³/h (120 cfm)	102 m³/h (60 cfm)	204 m³/h (120 cfm)	102 m³/h (60 cfm)	204 m³/h (120 cfm)	
	<b>C2</b>	420 m³/h (250 cfm)	840 m³/h (500 cfm)	420 m³/h (250 cfm)	840 m³/h (500 cfm)	420 m³/h (250 cfm)	840 m³/h (500 cfm)	

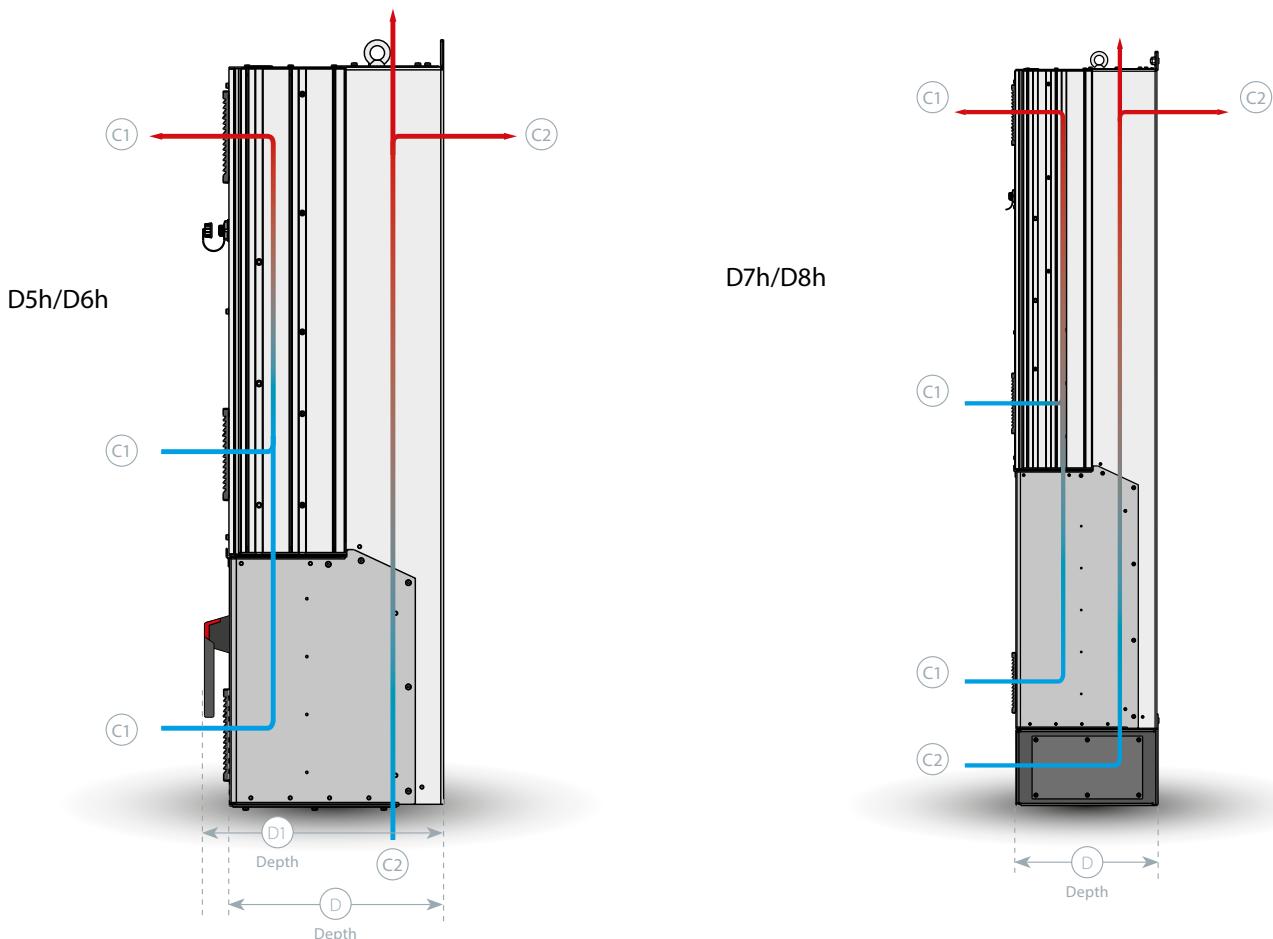



## A options: Fieldbuses

For A, B, C and D frames

### Fieldbus

#### A

VLT® PROFIBUS DP V1 MCA 101

VLT® DeviceNet MCA 104

VLT® LonWorks MCA 108

VLT® BACnet MCA 109

VLT® PROFINET MCA 120

VLT® EtherNet/IP MCA 121

VLT® Modbus TCP MCA 122

### VLT® PROFIBUS DP MCA 101

Operating the frequency converter via a fieldbus enables you to reduce the cost of your system, communicate faster and more efficiently, and benefit from an easier user interface.

- VLT® PROFIBUS DP MCA 101 provides wide compatibility, a high level of availability, support for all major PLC vendors, and compatibility with future versions
- Fast, efficient communication, transparent installation, advanced diagnosis and parameterisation and auto-configuration of process data via GSD-file
- A-cyclic parameterisation using PROFIBUS DP-V1, PROFIdrive or Danfoss FC profile state machines, PROFIBUS DP-V1, Master Class 1 and 2

#### Ordering number

130B1100 standard, 130B1200 coated

### VLT® DeviceNet MCA 104

VLT® DeviceNet MCA 104 offers robust, efficient data handling thanks to advanced Producer/Consumer technology.

- This modern communications model offers key capabilities that let you effectively determine what information is needed and when
- Benefit also from ODVA's strong conformance testing policies, which ensure that products are interoperable

#### Ordering number

130B1102 standard, 130B1202 coated

### VLT® LonWorks MCA 108

LonWorks is a fieldbus system developed for building automation. It enables communication between individual units in the same system (peer-to-peer) and thus supports decentralising of control.

- No need for big main station (master-follower)
- Units receive signals directly
- Supports Echelon free-topology interface (flexible cabling and installation)
- Supports embedded I/Os and I/O options (easy implementation of de-central I/Os)
- Sensor signals can quickly be moved to another controller via bus cables
- Certified as compliant with LonMark ver. 3.4 specifications

#### Ordering number

130B1106 standard, 130B1206 coated

## VLT® BACnet MCA 109

The open communications protocol for worldwide building automation. The BACnet protocol is an international protocol that efficiently integrates all parts of building automation equipment from the actuator level to the building management system.

Via the BACnet option it is possible to read all analogue and digital inputs and control all analogue and digital outputs of the VLT® HVAC Drive. All inputs and outputs can be operated independently of the drive's functions and thus work as remote I/Os:

- COV (Change of Value)
- Read/write Property Multiple
- Alarm/Warning handling

### Ordering number

130B1144 standard, 130B1244 coated

## VLT® PROFINET MCA 120

VLT® PROFINET MCA 120 uniquely combines the highest performance with the highest degree of openness. The MCA120 gives the user access to the power of Ethernet. The option is designed so that many of the features from the PROFIBUS MCA 101 can be reused, minimising user effort to migrate PROFINET, and securing the investment in PLC program.

### Other features:

- Built-in web server for remote diagnosis and reading out of basic drive parameters
- Support of DP-V1 Diagnostic allows easy, fast and standardized handling of warning and fault information into the PLC, improving bandwidth in the system

PROFINET encompasses a suite of messages and services for a variety of manufacturing automation applications, including control, configuration and information.

### Ordering number

130B1135 standard, 130B1235 coated

## VLT® EtherNet/IP MCA 121

Ethernet is the future standard for communication at the factory floor. The VLT® EtherNet/IP MCA 121 is based on the newest technology available for industrial use and handles even the most demanding requirements. EtherNet/IP extends commercial off-the-shelf Ethernet to the Common Industrial Protocol (CIP™) – the same upper-layer protocol and object model found in DeviceNet.

The VLT® MCA 121 offers advanced features as:

- Built-in high performance switch enabling line-topology, and eliminating the need for external switches
- Advanced switch and diagnoses functions
- Built-in web server
- E-mail client for service notification
- Unicast and Multicast communication

### Ordering number

130B1119 standard, 130B1219 coated

## VLT® Modbus TCP MCA 122

Modbus TCP is the first industrial Ethernet based protocol for automation. The VLT® Modbus TCP MCA 122 connects to Modbus TCP based networks. It is able to handle connection interval down to 5 ms in both directions, positioning it among the fastest performing

Modbus TCP devices in the market. For master redundancy it features hot swapping between two masters.

### Other features:

- Built-in web-server for remote diagnosis and reading out basic drive parameters
- An e-mail notificator can be configured for sending an e-mail message to one or several receivers, if certain warnings or alarms occurs, or has cleared again

### Ordering number

130B1196 standard, 130B1296 coated

## VLT® DeviceNet Converter MCA 194

The VLT® DeviceNet Converter MCA 194 emulates VLT® 5000 commands in the VLT® AutomationDrive. This means that a VLT® 5000 can be replaced by the VLT® AutomationDrive or an existing system can be expanded, without costly change of the PLC program.

For a later upgrade to a different fieldbus, the installed converter can easily be removed and replaced with a different option. This secures the investment without losing flexibility. The option emulates I/O instances & explicit messages of a VLT® 5000.

### Ordering number

NA standard, 130B5601 coated

# B options: Functional extensions

For A, B, C and D frames



### Functional extensions

#### B

- VLT® General Purpose MCB 101
- VLT® Relay Option MCB 105
- VLT® Analog I/O Option MCB 109
- VLT® PTC Thermistor Card MCB 112
- VLT® Sensor Input Card MCB 114
- VLT® Safe Option MCB 140 Series

## VLT® General Purpose I/O MCB 101

This I/O option offers an extended number of control inputs and outputs:

- 3 digital inputs 0-24 V:  
Logic '0' < 5 V; Logic '1' > 10V
- 2 analogue inputs 0-10 V:  
Resolution 10 bit plus sign
- 2 digital outputs NPN/PNP push pull
- 1 analogue output 0/4-20 mA
- Spring loaded connection

### Ordering number

130B1125 standard, 130B1212 coated

## VLT® Relay Option MCB 105

Makes it possible to extend relay functions with 3 additional relay outputs.

### Max. terminal load:

- AC-1 Resistive load ..... 240 V AC 2 A
- AC-15 Inductive load @cos fi 0.4 ..... 240 V AC 0.2 A
- DC-1 Resistive load ..... 24 V DC 1 A
- DC-13 Inductive load @cos fi 0.4 ..... 24 V DC 0.1 A

### Min. terminal load:

- DC 5 V ..... 10 mA
- Max switch rate at rated load/min. load ..... 6 min<sup>-1</sup>/20 sec<sup>-1</sup>
- Protects control cable connection
- Spring-loaded control wire connection

### Ordering number

130B1110 standard, 130B1210 coated

## VLT® Analog I/O Option MCB 109

This analogue input/output option is easily fitted in the frequency converter for upgrading to advanced performance and control using the additional in/outputs. This option also upgrades the frequency converter with a battery back-up supply for the frequency converter's built-in clock. This provides stable use of all frequency converter clock functions as timed actions etc.

- 3 analogue inputs, each configurable as both voltage and temperature input
- Connection of 0-10 V analogue signals as well as PT1000 and NI1000 temperature inputs
- 3 analogue outputs each configurable as 0-10 V outputs
- Incl. back-up supply for the standard clock function in the frequency converter

# B options: Functional extensions

For A, B, C and D frames



The back-up battery typically lasts for 10 years, depending on environment.

## Ordering number

130B1143 standard, 130B1243 coated

## VLT® PTC Thermistor Card MCB 112

ATEX-compliant module with thermal protection for single EEx d motors (Ziehl MS 220 DA).

- 1 PTB-certified thermistor input
- 1 switch-off signal for the integrated Safe Torque Off function (STO)
- 1 logic output for error identification

## Ordering number

NA standard, 130B1137 coated

\*for use of this option STO-function is needed (optional terminal 37, see page 21 "Safety")

## VLT® Sensor Input Card MCB 114

The option protects the motor from being overheated by monitoring the bearings and windings temperature in the motor. Both limits as well as action are adjustable, and the individual sensor temperature is visible as a read-out on the display or by fieldbus.

- Protects the motor from overheating
- Three self-detecting sensor inputs for 2 or 3-wire PT100/PT1000 sensors
- One additional analogue input 4-20 mA

## Ordering number

130B1172 standard, 130B1272 coated

## VLT® Safe Option MCB 140 Series

VLT® Safe Option MCB 140 Series are safety options providing Safe Stop 1 (SS1), Safely Limited Speed (SLS) and Safe Speed Monitor (SSM) functionality.

The options can be used up to PL e according to ISO 13849-1.

MCB 140 is a standard B-Option while MCB 141 offers the same functionality in an external 45 mm housing. MCB141 enables the user to use the MCB 140 functionality also if another B-Option is used.

Different operating modes can be easily configured by using the on board display and buttons. The options provide only a limited set of parameters for easy and fast parameterization.

- MCB 140 standard B-Option
- MCB 141 external Option
- Single channel or dual channel operation possible
- Proximity switch as speed feedback
- SS1, SLS and SMS functionality
- Easy and fast parameterization

## Ordering number

130B6443 MCB 140, 130B6447 MCB 141

# D option: External power supply

For A, B, C and D frames



## Option slot

D

VLT® 24 V DC Supply Option MCB 107

## VLT® 24 V DC Supply MCB 107

The option is used to connect an external DC supply to keep the control section and any installed option alive during power failure.

- Input voltage range...24 V DC +/- 15% (max. 37 V in 10 sec.)
- Max. input current ..... 2,2 A
- Max. cable length ..... 75 m
- Input capacitance load ..... < 10 uF
- Power-up delay ..... < 0,6 s

## Ordering number

130B1108 standard, 130B1208 coated

# Accessories

For A, B, C and D frames

## LCP

VLT® Control Panel LCP 101 (*Numeric*)

*Ordering number:* 130B1124

VLT® Control Panel LCP 102 (*Graphical*)

*Ordering number:* 130B1107

LCP Panel Mounting Kit

*Ordering number for IP 20 enclosure*

130B1113: With fasteners, gasket, graphical LCP and 3 m cable

130B1114: With fasteners, gasket, numerical LCP and 3 m cable

130B1117: With fasteners, gasket and without LCP and with 3 m cable

130B1170: With fasteners, gasket and without LCP

*Ordering number for IP 55 enclosure*

130B1129: With fasteners, gasket, blind cover and 8 m "free end" cable

## Power Options\*

VLT® Sine-Wave Filter MCC 101

VLT® dU/dt Filter MCC 102

VLT® Common Mode Filters MCC 105

VLT® Advanced Harmonic Filter AHF 005/010

VLT® Brake Resistors MCE 101

## Accessories

Profibus SUB-D9 Adapter

IP 20, A2 and A3

*Ordering number:* 130B1112

USB Extension

*Ordering number:*

130B1155: 350 mm cable

130B1156: 650 mm cable

IP 21/Type 1 (NEMA 1) Kit

*Ordering number:*

130B1122: For frame size A2

130B1123: For frame size A3

130B1187: For frame size B3

130B1189: For frame size B4

130B1191: For frame size C3

130B1193: For frame size C4

Motor connector

*Ordering number:*

130B1065: frame A2 to A5 (10 pieces)

Mains connector

*Ordering number:*

130B1066: 10 pieces mains connectors IP 55

130B1067: 10 pieces mains connectors IP20/21

Relays 1 terminal

*Ordering number:* 130B1069 (10 pieces 3 pole connectors for relay 01)

Relays 2 terminal

*Ordering number:* 130B1068 (10 pieces 3 pole connectors for relay 02)

Control card terminals

*Ordering number:* 130B0295

\**Ordering number:* See relevant Design Guide

# Ordering typecode for A, B, C and D frames

[1]	[2]	[3]	[4]	[5]	[6]	[7]	[8]	[9]	[10]	[11]	[12]	[13]	[14]	[15]	[16]	[17]	[18]	[19]
FC-		-		-		-		-		-		-		-	CX	-	X	- XX -
<b>[1] Application (character 4-6)</b>																		
102	VLT® HVAC Drive FC 102																	
<b>[2] Power size (character 7-10)</b>																		
P1K1	1.1 kW / 1.5 HP																	
P1K5	1.5 kW / 2.0 HP																	
P2K2	2.2 kW / 3.0 HP																	
P3K0	3.0 kW / 4.0 HP																	
P3K7	3.7 kW / 5.0 HP																	
P4K0	4.0 kW / 5.5 HP																	
P5K5	5.5 kW / 7.5 HP																	
P7K5	7.5 kW / 10 HP																	
P11K	11 kW / 15 HP																	
P15K	15 kW / 20 HP																	
P18K	18.5 kW / 25 HP																	
P22K	22 kW / 30 HP																	
P30K	30 kW / 40 HP																	
P37K	37 kW / 50 HP																	
P45K	45 kW / 60 HP																	
P55K	55 kW / 75 HP																	
P75K	75 kW / 100 HP																	
P90K	90 kW / 125 HP																	
N55K	55 kW / 75 HP																	
N75K	75 kW / 100 HP																	
N90K	90 kW / 125 HP																	
N110	110 kW / 150 HP																	
N132	132 kW / 200 HP																	
N160	160 kW / 250 HP																	
N200	200 kW / 300 HP																	
N250	250 kW / 350 HP																	
N315	315 kW / 450 HP																	
N400	400 kW / 550 HP																	
<b>[3] AC Line Voltage (character 11-12)</b>																		
T2	3 x 200/240 V AC (1.1 – 45 kW)																	
T4	3 x 380/480 V AC (1.1 – 1000 kW)																	
T6	3 x 525/600 V AC (1.1 – 90 kW)																	
T7	3 x 525/690 V AC (1.1 – 1400 kW)																	
<b>[4] Enclosure (character 13-15)</b>																		
<i>For cabinet mounting:</i>																		
E20	IP 20/Chassis (frame A2, A3, B3, B4, C3, C4, D3h, D4h)																	
<i>Standalone:</i>																		
E21	IP 21/Type 1 (frame B1, B2, C1, C2, D1h, D2h, D5h, D6h, D7h, D8h)																	
E54	IP 54/Type 12 (frame D1h, D2h, D5h, D6h, D7h, D8h)																	
E55	IP 55 (frame A5, B1, B2, C1, C2)																	
E66	IP 66/Type 4X outdoor* – frame A5, B1, B2, C1, C2)																	
Z55	IP 55/Type 12 (frame A4)																	
Z66	IP 66/NEMA 4X* (frame A4)																	
<i>Special designs:</i>																		
P20	IP 20 (frame B4, C3, C4 – with back plate)																	
E2M	IP 21/Type 1 with mains shield (frame D1h, D2h, D5h, D6h, D7h, D8h)																	
P21	IP 21/Type 1 (frame as E21 – with back plate)																	
E5M	IP 54/Type 12 with mains shield (frame D1h, D2h, D5h, D6h, D7h, D8h)																	
<b>[5] RFI filter, terminal and monitoring options – EN/IEC 61800-3 (character 16-17)</b>																		
P55	IP 55 (frame as E55 – with back plate)																	
Y55	IP 55 (frame as Z55 – with back plate)																	
Y66	IP 66/NEMA 4X* (frame as Z66 – with back plate)																	
<b>[6] Braking and safety (character 18)</b>																		
X	No brake IGBT																	
B	Brake IGBT																	
T	Safe Stop without brake																	
R	Regeneration terminals (D frame only)																	
U	Brake IGBT plus Safe Stop																	
<b>[7] LCP Display (character 19)</b>																		
X	Blank faceplate, no LCP installed																	
N	Numerical Local Control Panel (LCP 101)																	
G	Graphical Local Control Panel (LCP 102)																	
<b>[8] PCB Coating – IEC 721-3-3 (character 20)</b>																		
X	No conformal coating (Class 3C2)																	
C	Conformal coating on all PCBs (Class 3C3)																	
R	Conformal coating plus ruggedized																	
<b>[9] Mains input (character 21)</b>																		
X	No mains option																	
1	Mains disconnect																	
7	Fuses (D frame only)																	
8	Mains disconnect and loadsharing (B1, B2, C1 and C2 frames only)																	
A	Fuses and loadsharing terminals (D frame IP 20 only)																	
D	Loadsharing terminals (B1, B2, C1 and C2 frames only) D-frame only IP 20)																	
3	Mains disconnect + fuse (D frame only)																	
4	Mains contactor + fuse (D frame only)																	
5	Mains disconnect, fuse and load sharing																	
E	Mains disconnect + contactor + fuse (D frame only)																	
J	Circuit breaker + fuse (D frame only)																	
<b>[10] Power terminals and motor starters (character 22)</b>																		
X	Standard cable entries																	
O	Metric cable entries																	
S	US cable entries (not for A4 frame)																	
<b>[11] Auxiliary 24 V supply and external temperature monitoring (character 23)</b>																		
X	No adaptation																	
Q	Heat-sink access panel (D frame only)																	

\* Only available in the USA

Based on your selection, Danfoss manufactures the desired VLT® HVAC Drive.  
You will receive a fully assembled frequency converter, tested under full load conditions.

<b>[12] Special version (character 24-27)</b>
SXXX No option
<b>[13] LCP language (character 28)</b>
X Standard language package including English, German, French, Spanish, Danish, Italian and Finnish
<b>Contact factory for other language options</b>
<b>[14] Fieldbus (character 29-30)</b>
AX No option
A0 VLT® PROFIBUS DP V1 MCA 101
A4 VLT® DeviceNet MCA 104
AG VLT® LonWorks MCA 108
AJ VLT® BACnet MCA 109
AL VLT® PROFINET MCA 120
AN VLT® EtherNet/IP MCA 121
AQ VLT® Modbus TCP MCA 122
<b>[15] Application (character 31-32)</b>
BX No application option
BK VLT® General Purpose MCB 101
BP VLT® Relay Option MCB 105
BZ VLT® Safety PLC I/O MCB 108
B0 VLT® Analog I/O Option MCB 109
B2 VLT® PTC Thermistor Card MCB 1

# Power and enclosures

VLT® HVAC Drive		T2 200 – 240 V				T4/T5 380 – 480 V				T6 525 – 600 V				T7 525 – 690 V						
FC 102	kW	A	IP20	IP21	IP55	IP66	A		IP20	IP21	IP54	IP55	IP66	A		IP20	IP21	IP54	IP55	IP66
			<440 V	>440 V										<550 V	>550 V					
P1K1	1.1	6.6					3	2.7						2.6	2.4				2.1	1.6
P1K5	1.5	7.5	A2	A2	A4 A5	A4 A5	4.1	3.4	A2	A2				2.9	2.7	A3	A3	A5	2.7	2.2
P2K2	2.2	10.6					5.6	4.8						4.1	3.9				3.9	3.2
P3K0	3.0	12.5	A3	A3	A5	A5	7.2	6.3						5.2	4.9				4.9	4.5
P3K7	3.7	16.7																		
P4K0	4.0						10	8.2	A2	A2				6.4	6.1				6.1	5.5
P5K5	5.5	24.2					13	11	A3	A3				9.5	9	A3	A3	A5	9	7.5
P7K5	7.5	30.8	B3	B1	B1	B1	16	14.5						11.5	11				11	10
P11K	11	46.2					24	21						19	18				14	13
P15K	15	59.4	B4	B2	B2	B2	32	27	B3	B1				23	22	B3	B1	B1	19	18
P18K	18.5	74.8					37.5	34						28	27				23	22
P22K	22	88	C3	C1	C1	C1	44	40						36	34	B4	B2	B2	B2	B2
P30K	30	115					61	52	B4	B2				43	41	B4	B2	B2	36	34
P37K	37	143	C4	C2	C2	C2	73	65						54	52				43	41
P45K	45	170					90	80	C3	C1				65	62	C3	C1	C1	54	52
P55K	55						106	105						87	83				65	62
P75K	75						147	130						105	100	C4	C2	C2	87	83
P90K	90						177	160	C4	C2				137	131				105	100
N75K*	75																		90	86
N90K*	90																		113	108
N110	110						212	190											D3h	D1h D5h D6h
N132	132						260	240	D3h	D1h D5h D6h									137	131
N160	160						315	302											162	155
N200	200						395	361											201	192
N250	250						480	443	D4h	D2h D7h D8h	D2h D7h D8h								253	242
N315	315						588	535											303	290
N400*	400																		360	344
																			418	400

\* Only available in 690 V

D8h

IP 20/Chassis ■

IP 21/Type 1 ■

IP 21 with upgrade kit – available in US only ■

IP 54/Type 12 ■

IP 55/Type 12 ■

IP 66/NEMA 4X ■

D7h

D6h

D5h

B3

B4

C3

C4

D7h

D6h

D5h

B2

C1

C2

D2h

D4h

D1h

D3h

# What VLT® is all about

Danfoss VLT Drives is the world leader among dedicated drives providers – and still gaining market share.

## Environmentally responsible

VLT® products are manufactured with respect for the safety and well-being of people and the environment.

All frequency converter factories are certified according to ISO 14001 and ISO 9001 standards.

All activities are planned and performed taking into account the individual employee, the work environment and the external environment. Production takes place with a minimum of noise, smoke or other pollution and environmentally safe disposal of the products is pre-prepared.

## UN Global Compact

Danfoss has signed the UN Global Compact on social and environmental responsibility and our companies act responsibly towards local societies.

## Impact on energy savings

One year's energy savings from our annual production of VLT® drives will save the energy equivalent to the energy production from a major power plant. Better process control at the same time improves product quality and reduces waste and wear on equipment.

## Dedicated to drives

Dedication has been a key word since 1968, when Danfoss introduced the world's first mass produced variable speed drive for AC motors – and named it VLT®.

Twenty five hundred employees develop, manufacture, sell and service drives and soft starters in more than one hundred countries, focused only on drives and soft starters.

## Intelligent and innovative

Developers at Danfoss VLT Drives have fully adopted modular principles in development as well as design, production and configuration.

Tomorrow's features are developed in parallel using dedicated technology platforms. This allows the development of all elements to take place in parallel, at the same time reducing time to market and ensuring that customers always enjoy the benefits of the latest features.

## Rely on the experts

We take responsibility for every element of our products. The fact that we develop and produce our own features, hardware, software, power modules, printed circuit boards, and accessories is your guarantee of reliable products.

## Local backup – globally

VLT® motor controllers are operating in applications all over the world and Danfoss VLT Drives' experts located in more than 100 countries are ready to support our customers with application advice and service wherever they may be.

Danfoss VLT Drives experts don't stop until the customer's drive challenges are solved.



**Danfoss VLT Drives**, Ulsnaes 1, DK-6300 Graasten, Denmark, Tel. +45 74 88 22 22, Fax +45 74 65 25 80  
[www.danfoss.com/drives](http://www.danfoss.com/drives), E-mail: [info@danfoss.com](mailto:info@danfoss.com)

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary in specifications already agreed.  
All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.



Automatización Eléctrica

Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B1275		<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H2XGXXXXSXXXXAXBXCXXXXDX	131B3526		<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H2XGXXXXSXXXXAXBXCXXXXDX	131B3532		<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H2XGXXXXSXXXXAXBXCXXXXDX	131B3611		<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H2XGXXXXSXXXXAXBXCXXXXDX	131B4206		<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4208		<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H2XGXXXXSXXXXAXBXCXXXXDX	131B4214		<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H2XGXXXXSXXXXAXBXCXXXXDX	131B4215		<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H2XGXXXXSXXXXAXBXCXXXXDX	131B4216	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4226	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4227	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4228	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4229	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4230	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4231	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4269	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4270	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4979	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B4980	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B6929	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P132T4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B6935	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B6941	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B7009	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B7016	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B7026	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B8594	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2XGXXXXSXXXXAXBXCXXXXDX	131F0426	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E20H2XGXXXXSXXXXAXBXCXXXXDX	131F5448	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E20H2XGXXXXSXXXXAXBXCXXXXDX	131F5449	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H2XGXXXXSXXXXAXBXCXXXXDX	131F5451	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2XGXXXXSXXXXAXBXCXXXXDX	131F5454	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H2XGXXXXSXXXXAXBXCXXXXDX	131F5456	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H2XGXXXXSXXXXAXBXCXXXXDX	131F6625	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2XGXXXXSXXXXAXBXCXXXXDX	131F6626	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E20H2XGXXXXSXXXXAXBXCXXXXDX	131F6627	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E20H2XGXXXXSXXXXAXBXCXXXXDX	131F6628	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N160T4E54H4XGCXXXSXXXXA0BXCXXXXDX	134H4992	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Coated PCB, Fuse FC-102N110T4E54H4XGC7XXSXXXXA0BXCXXXXD0	134H1749	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102P7K5T4E66H2XGXXXXSXXXXA0BXCXXXXDX	131N1232	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, Safe Stop, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Coated PCB 3C3 + Ruggedise, Fuse FC-102N315T4E5MH4TGR7XXSXXXXAXBXCXXXXDX	134H3259	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type12 Backplate, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4P55H1XGXXXXSXXXXAXBXCXXXXDX	131B5662	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 560 KW / 750 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P560T4E54H2XGXXXXSXXXXAXBXCXXXXDX	131G5109	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E20H2XGXXXXSXXXXA0BXCXXXXDX	131G1598	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21/Type 1+mains shield, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, Fuse FC-102P132T4E2MH2XGX7XXSXXXXAXBXCXXXXDX	131F9307	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Coated PCB, No Mains Option FC-102N132T4E20H2TGCXXXXSXXXXALBXCXXXXDX	134N5515	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E20H2TGXXXXSXXXXALBXCXXXXDX	134N5514	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H2XGXXXXSXXXXA0BXCXXXXDX	131F0230	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H2XGXXXXSXXXXA0BXCXXXXDX	131F0231	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT2E20H1XGXXXXSXXXXAXBXCXXXXDX	131H3090	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B3449	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H2XNXXXXSXXXXAXBXCXXXXDX	131H0030	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H1TGXXXXSXXXXA0BXCXXXXDX	131H9256	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H1XXXXXXXXSXXXXAXBXCXXXXDX	131F7659	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102P250T4E00H2XGCXXXSXXXXAXBKCXXXXDX	131G7984	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N160T4E20H2TGXXXXSXXXXAXBXCXXXXDX	134H0511	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2TGXXXXSXXXXAXBXCXXXXDX	131X2659	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H1TGXXXXSXXXXA0BXCXXXXDX	131G3930	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2TGXXXXSXXXXAXBXCXXXXDX	131G0881	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H2TGXXXXSXXXXALBXXCXXXXDX	134N6745	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1XXXXXSXXXAXBXCXXXXDX	131G8886	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K5T2E20H1GXXXXSXXXAXBXCXXXXDX	131B7628	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1XXXXXSXXXA0BXCXXXXDX	131F3158	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H1GXXXXSXXXAGBXCXXXXDX	131F2687	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E55H1GXXXXSXXXAGBXCXXXXDX	131F2685	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E55H1GXXXXSXXXAGBXCXXXXDX	131F2684	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E55H1GXXXXSXXXAGBXCXXXXDX	131F2683	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E55H2TGXXXXSXXXA0BXCXXXXDX	131X9329	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12 Backplate, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P3K0T4P55H1GcxxxsxxxxAXBXCXXXXDX	131U4912	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H2XXXXXSXXXAXBXCXXXXDX	131B4994	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E20H3GXXXXSXXXAXBXCXXXXDX	131F9941	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT2E20H2GXXXXSXXXAXBXCXXXXDX	131H3897	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P1K1T4E20H2XGCXXXSXXXXAGBXCXXXDX	131N2807	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H2XGXXXSXXXXA0BXCXXXDX	131G0016	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), DeviceNet MCA 104, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H2XGXXXSXXXXA4BXCXXXDX	131F2428	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H2TGXXXSXXXXAXBXCXXXDX	131N5279	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, Safe Stop, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, Mains Disconnect + Fuse FC-102P200T4E00H2TGX3XXSXXXXAXBKCXXXDX	131G4374	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P200T4E54H2XGCXXXSXXXXAXBXCXXXDX	131G4375	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H3XGXXXSXXXXAXBXCXXXDX	131B5470	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H3XGXXXSXXXXAXBXCXXXDX	131B5473	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H3XGXXXSXXXXAXBXCXXXDX	131B5472	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A1/B (cable len) (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E21H3XGXXXSXXXXAXBXCXXXDX	131B5475	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H3XGXXXSXXXXAXBXCXXXDX	131B5474	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P18KT4E55H1XGXXXXSXXXXAXBKCXXXXDX	131F1552	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H2XNXXXXSXXXXA0BXCXDDX	131G0692	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T2E20H1XGXXXXSXXXXAXBXCXXXXDX	131F9318	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P110T4E00H4XGX7XXSXXXXAXBXCXXXXDX	131F8210	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P200T4E00H4XGX7XXSXXXXAXBXCXXXXDX	131F8216	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P160T4E00H4XGX7XXSXXXXAXBXCXXXXDX	131F8214	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P250T4E00H4XGX7XXSXXXXAXBXCXXXXDX	131F8218	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E66H2XGXXXXSXXXXAXBXCXXXXDX	131G0210	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), Modbus TCP MCA 122, No B Option, Coated PCB, No Mains Option FC-102N315T4E20H2XGCXXXSXXXXAQBXCXXXXDX	134H6549	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), Modbus TCP MCA 122, No B Option, Coated PCB, No Mains Option FC-102N200T4E20H2XGCXXXSXXXXAQBXCXXXXDX	134H6548	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P5K5T4E20H1XGCXXXSXXXXAGBCXCXXXXDX	131U7073	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P250T4E21H4XGX7XXSXXXXAXBXCXXXXDX	131F8135	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H2XGXXXXSXXXXAGBXCXXXXDX	131F8055	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P3K0T4E66H1XNCXXXSXXXXAGBXCXXXXDX	134N8105	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P2K2T4E66H1XNCXXXSXXXXAGBXCXXXXDX	134N8104	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P7K5T4E66H1XNCXXXSXXXXAGBXCXXXXDX	134N8107	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P5K5T4E66H1XNCXXXSXXXXAGBXCXXXXDX	134N8106	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P1K5T4E66H1XNCXXXSXXXXAGBXCXXXXDX	134N8103	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P1K1T4E66H1XNCXXXSXXXXAGBXCXXXXDX	134N8102	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, MCB-112 PTC Therm. Card, Not coated PCB, No Mains Option FC-102P1K1T4E20H1TXXXXXSXXXXA0B2CXXXXDX	134G8215	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P5K5T4E66H1XGCXXXSXXXXAXBXCXXXXDX	131F0684	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type12 Backplate, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4P55H1XGXXXXSXXXXAXBXCXXXXDX	131B5656	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP66 / NEMA 4X, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E66H1TGXXXXSXXXXA0BXCXXXXDX	134F7481	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2TGXXXXSXXXXA0BXCXXXXD0	131X2937	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H2TGXXXXSXXXXA0BXCXXXXD0	131X2935	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H2TGXXXXSXXXXA0BXCXXXXD0	131X2932	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P250T4E54H2TGXXXXSXXXXA0BXCXXXXDX	131G6849	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2TGXXXXSXXXXAXBXCXXXXD0	131B9720	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 355 KW / 500 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, LHD - AAF006 filter + A2 RFI, No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P355T4E54N2XGC3XXSXXXXAXBXCXXXXDX	134F4041	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-105 Relay Card, Not coated PCB, No Mains Option FC-102P75KT4E20H2TGXXXXSXXXXAXBPCXXXXDX	134H3932	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-105 Relay Card, Coated PCB, No Mains Option FC-102N200T4E20H2TGXXXXSXXXXAXBPCXXXXDX	134H3931	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H2TGXXXXSXXXXAXBXCXXXXDX	131N2297	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E55H3XNXXXXSXXXXAXBXCXXXXDX	131B7652	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E55H3XNXXXXSXXXXAXBXCXXXXDX	131B7650	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H1TGXXXXSXXXXAXBXCXXXXDX	131B9854	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H1TGXXXXSXXXXAXBXCXXXXDX	131B9851	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 525 - 690 VAC *, Brake chopper + Safe stop, IP20 / Chassis, Marine, ruggedised RFI A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P5K5T7E20H5UGCXXXSXXXXAXBXCXXXXDX	134L8420	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 525 - 690 VAC *, Brake chopper + Safe stop, IP20 / Chassis, Marine, ruggedised RFI A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P7K5T7E20H5UGCXXXSXXXXAXBXCXXXDX	134L8422	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H2XGXXXSXXXXA0BXCXXXDX	131F6460	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P450T4E54H2TGC3XXSXXXXA0BXCXXXDX	131L5931	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P7K5T2E55H2XNCXXXSXXXXAXBXCXXXDX	131X1360	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102P315T4E54H4XGCXXXSXXXXA0BXCXXXDX	131F9880	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E55H2XGXXXSXXXXA0BXCXXXDX	131L2604	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N315T4E21H2XGCXXXSXXXXAXBXCXXXDX	134F4267	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102N250T4E20H4XGCXXXSXXXXAXBXCXXXDX	134F4260	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2XGXXXSXXXXA0BXCXXXDX	131G0858	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H2XNXXXXSXXXXAGBCXCXXXDX	131G7096	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T2E55H3XGXXXSXXXXAXBXCXXXDX	131B6735	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type12 Backplate, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4P55H1XGXXXSXXXXAXBXCXXXDX	131B5665	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T2E20H2XGXXXXSXXXXAXBXCXXXXDX	131B3458	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E20H2TGXXXXSXXXXA0BXCXXXXDX	131U4454	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Fuse FC-102P200T4E54H2XGC7XXSXXXXAXBXCXXXXDX	131G8279	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P250T4E00H2XGCXXXSXXXXAXBXCXXXXDX	131L1634	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E20H2XGXXXXSXXXXA0BXCXXXXDX	131H6226	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102P450T4E54H4TGCXXXSXXXXAXBXCXXXXDX	131H0105	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT2E20H1XGXXXXSXXXXAXBXCXXXXDX	131H5222	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P37KT4E20H2XNCXXXSXXXAGBXCVXXXXDX	134G4230	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, Fuse FC-102P132T4E54H4TGC7XXSXXXXAXBXCXXXXDX	131Z0234	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E55H2XGXXXXSXXXXA0BXCXXXXDX	131H0832	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E55H3XGXXXXSXXXXAXBXCXXXXDX	131B5488	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E55H3XGXXXXSXXXXAXBXCXXXXDX	131B5489	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E55H3XGXXXXSXXXXAXBXCXXXXDX	131B5480	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E55H3XGXXXXSXXXXAXBXCXXXXDX	131B5481	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H3XGXXXXSXXXXAXBXCXXXXDX	131B5482	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 200 - 240 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T2E66H2XGXXXXSXXXXAXBXCXXXXDX	131L1097	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 200 - 240 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T2E66H2XGXXXXSXXXXAXBXCXXXXDX	131L1096	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E21H2XXXXXSXXXXAXBXCXXXXDX	131B5004	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H1TGXXXXSXXXXAXBXCXXXXDX	131H2986	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E20H2TGXXXXSXXXXAXBXCXXXXDX	131L0945	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E55H2TGXXXXSXXXXA0BXCCXXXXDX	131X9493	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 200 - 240 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT2E21H2XGXXXXSXXXXAXBXCXXXXDX	131B8517	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, Safe Stop, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Coated PCB, Fuse FC-102P315T4E00H4TGC7XXSXXXXAXBXCXXXXDX	131G1132	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E55H2XGXXXXSXXXXAGBXCCXXXXDX	131H9746	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P132T4E21H2XGXXXXSXXXXAXBKCXXXXDX	131F7586	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P250T4E00H4XGXXXXSXXXXAXBKCXXXXDX	131F7583	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P200T4E00H4XGXXXXSXXXXAXBKCXXXXDX	131F7582	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P160T4E00H4XGXXXXSXXXXAXBKCXXXXDX	131F7581	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H2XGXXXXSXXXXAGBXCXXXXDX	131F8056	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H2XGXXXXSXXXXAGBXCXXXXDX	131F8057	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2XGXXXXSXXXXAGBXCXXXXDX	131F8059	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E55H2XNXXXXSXXXXAXBXCXXXXDX	131F0074	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P90KT4E20H2XGCXXXSXXXXAGBXCXXXXDX	134H5792	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102N200T4E20H2TGCXXXSXXXXAXBKCXXXXDX	134H7442	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P55KT4E20H1XGCXXXSXXXXAXBXCXXXXDX	131H9057	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P30KT4E20H1XGCXXXSXXXXAXBXCXXXXDX	131H9056	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H2XNXXXXSXXXAGBCXXXXDX	131G7090	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2XNXXXXSXXXAGBCXXXXDX	131G7094	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2XNXXXXSXXXAGBCXXXXDX	131G7095	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 525 - 690 VAC *, Brake chopper + Safe stop, IP20 / Chassis, Marine, ruggedised RFI A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P1K5T7E20H5UGCXXXSXXXAXBXCXXXXDX	134L8415	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 525 - 690 VAC *, Brake chopper + Safe stop, IP20 / Chassis, Marine, ruggedised RFI A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P1K1T7E20H5UGCXXXSXXXAXBXCXXXXDX	134L8414	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 525 - 690 VAC *, Brake chopper + Safe stop, IP20 / Chassis, Marine, ruggedised RFI A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P3K0T7E20H5UGCXXXSXXXAXBXCXXXXDX	134L8417	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 525 - 690 VAC *, Brake chopper + Safe stop, IP20 / Chassis, Marine, ruggedised RFI A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P2K2T7E20H5UGCXXXSXXXAXBXCXXXXDX	134L8416	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP21 / Type 1, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E21H1TGXXXSXXXA0BXCXXXXDX	131H3567	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P22KT4E20H2XGXXXSXXXAXBKCXXXXDX	131H7078	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H1XGXXXSXXXAGBCXXXXDX	131H4781	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E55H1XGXXXSXXXA0BXCXXXXDX	131B9568	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P37KT4E20H1UGCXXXSXXXXAXBXCXXXXDX	131H3169	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P90KT4E20H1UGCXXXSXXXXAXBXCXXXXDX	131H3167	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P55KT4E55H1UGCXXXSXXXXAXBXCXXXXDX	131H3163	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P30KT4E55H1UGCXXXSXXXXAXBXCXXXXDX	131H3162	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P2K2T4E55H1UGCXXXSXXXXAXBXCXXXXDX	131H3161	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P110T4E54H4XGX3XXSXXXXA0BXCXXXXDX	131H2567	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP55 / Type12 Backplate, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, Loadsharing FC-102P30KT4P55H1UGCDXXSXXXXAXBXCXXXXDX	131N0041	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102N160T4E21H4XGCXXXSXXXXAXBXCXXXXDX	134F4251	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102N200T4E54H4XGCXXXSXXXXAXBXCXXXXDX	134F4253	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N160T4E54H2XGCXXXSXXXXAXBXCXXXXDX	134F4252	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N200T4E54H2XGCXXXSXXXXAXBXCXXXXDX	134F4254	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2XGXXXXSXXXXALBXCXXXXDX	134F1833	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2XGXXXXSXXXXA0BXCXXXXDX	131G0841	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P3K0T4E55H1XGCXXXSXXXXAXBXCXXXXDX	131B8499	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H1XNXXXXSXXXXAGBXCVXXXXD0	134L1606	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H1XNXXXXSXXXXAGBXCVXXXXD0	134L1605	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 200 - 240 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P18KT2E21H2XGXXXXSXXXXA0BXCXXXXDX	134L6034	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P18KT4E66H1XGCXXXSXXXXAXBXCXXXXDX	131B8642	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P45KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B9203	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P1K1T4E55H1XNCXXXSXXXXAXBXCXXXXDX	131U4118	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2XNXXXXSXXXXAXBXCXXXXDX	131F9187	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.7 KW / 5.0 HP, 200 - 240 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P3K7T2E20H1TGXXXXSXXXXALBXCVXXXXDX	134N3330	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H1TXXXXSXXXXAXBXCXXXXDX	131L9616	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P11KT2E20H1XGCXXXSXXXXAGBXCVXXXXDX	131U7209	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P200T4E21H2XGXXXXSXXXXAXBKCXXXXDX	131F7589	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Fuse FC-102P132T4E54H2XGC7XXSXXXXAXBXCXXXXDX	131G1837	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P90KT4E20H2XGCXXXSXXXXAXBXCXXXXDX	131H3268	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-105 Relay Card, Coated PCB, No Mains Option FC-102N315T4E20H2TGCXXXSXXXXAXBPCXXXXDX	134H7848	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P160T4E21H2XGXXXXSXXXXAXBKCXXXXDX	131F7588	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P55KT4E20H2XGCXXXSXXXXAXBXCXXXXDX	131G5245	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 710 KW / 1000 HP, 525 - 690 VAC *, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P710T7E21H2XGC3XXSXXXXA0BXCXXXXDX	134N0338	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P110T4E21H2XGXXXXSXXXXAXBKCXXXXDX	131F7585	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), BACnet MCA 109, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H2XGXXXXSXXXXAJBXCCXXXXDX	131L5253	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P5K5T4E55H1XGCXXXSXXXXAGBXCCXXXXDX	131N7646	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H1TGXXXXSXXXXA0BXCXXXXDX	131H9264	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H2XGXXXXSXXXXAGBXCCXXXXDX	131F8061	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, LHD - AAF006 filter + A2 RFI, PROFINET MCA 120, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P315T4E54N2TGC3XXSXXXXALBXCXDDX	134N8766	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P315T4E54H2XGC3XXSXXXXAXBXCXXXXDX	131F9516	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2XGXXXXSXXXXA0BXCXXXXD0	131H9460	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H2XGXXXXSXXXXA0BXCXXXXD0	131H9461	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E20H2XGXXXXSXXXXA0BXCXXXXD0	131H9462	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102N250T4E54H4XGCXXXSXXXXAXBKCXXXXDX	134L3519	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B3343	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP21/Type 1+mains shield, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N315T4E2MH2XGCXXXSXXXXAXBXCXXXXDX	134F6808	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P11KT4E66H2XGCXXXSXXXXAXBXCXXXXDX	131B7030	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H1TGXXXXSXXXXALBXCXDDX	131Z8336	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E66H2XGXXXXSXXXXAXBXCXXXXDX	131B8502	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P5K5T4E55H1XGCXXXSXXXXAXBXCXXXXDX	131B8500	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H1TGXXXXSXXXXA0BXCXXXXDX	131G2165	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P7K5T2E20H1XGCXXXSXXXXAXBXCXXXXDX	131N3549	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N250T4E20H2TGCXXXSXXXXAXBXCXXXXDX	134H0677	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102P250T4E54H4TGCXXXSXXXXAXBXCXXXXDX	131H3173	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E55H2XGXXXXSXXXXA0BXCXXXXDX	131H2550	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H1XNXXXXSXXXXAXBXCXXXXDX	131B5583	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102N110T4E21H4XGCXXXSXXXXAXBXCXXXXDX	134F4246	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N132T4E54H2XGXXXSXXXXAXBXCXXXXDX	134F4247	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E20H2TGCXXXSXXXXA0BXCXXXXDX	134G3604	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2TGXXXXSXXXXA0BXCXXXXDX	131U8249	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N250T4E54H2XGXXXSXXXXA0BXCXXXXDX	134G5725	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT2E20H2XGXXXXSXXXXAXBXCXXXXDX	131H3796	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N250T4E20H2BGXXXSXXXXAXBXCXXXXDX	134G5433	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H3XGXXXXSXXXXAXBXCXXXXDX	131B5468	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, Brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N110T4E54H2BGCXXXSXXXXAXBXCXXXXD0	134U4754	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P250T4E54H4XGXXXXSXXXXA0BXCXXXXDX	131H1810	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P110T4E54H4XGXXXXSXXXXA0BXCXXXXDX	131H0148	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P132T4E54H2XGX3XXSXXXXA0BXCXXXXDX	131N1639	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P3K0T4E55H1XGCXXXSXXXAGBXCXXXXDX	131U7874	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P75KT4E55H2XGCXXXSXXXXAXBXCXXXXDX	131F1617	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E55H2XGXXXXSXXXXAXBXCXXXXDX	131B8596	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H3XGXXXXSXXXXAXBXCXXXXDX	131B5469	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, Safe Stop, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P200T4E00H2TGXXXSXXXXAXBXCXXXXDX	131N0456	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P315T4E5MH2XGCXXXSXXXXAXBXCXXXXDX	131F8101	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 355 KW / 500 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102P355T4E00H2XGCXXXSXXXXAXBKCXXXXDX	131F7616	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102P315T4E00H2XGCXXXSXXXXAXBKCXXXDX	131F7615	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E55H3XGXXXSXXXXA0BXCXXXDX	131F7612	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E55H3XGXXXSXXXXA0BXCXXXDX	131F7611	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E55H2XGXXXSXXXXA0BXCXXXDX	131F9299	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E55H2XGXXXSXXXXA0BXCXXXDX	131F9298	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, Brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Loadsharing FC-102P132T4E5MH4BGDXXSXXXXAXBXCXXXDX	131F9292	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H3XNXXXSXXXXAXBXCXXXDX	131F9296	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-109 I/O, RTC Back-up, Not coated PCB, No Mains Option FC-102P90KT4E20H2XGXXXSXXXXAXB0CXXXDX	131H8761	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H1XGXXXSXXXXAGBXCXXXDX	131F1907	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H1TGXXXSXXXXALBXCXXXDX	134F7277	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P132T4E5MH4XGXXXSXXXXAXBXCXXXDX	131F8079	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E5MH2XGXXXXSXXXXAXBXCXXXXDX	131F8076	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E5MH2XGXXXXSXXXXAXBXCXXXXDX	131F8077	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P200T4E5MH2XGXXXXSXXXXAXBXCXXXXDX	131F8075	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N315T4E20H2TGCXXXSXXXXAXBXCXXXXDX	134F9232	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E20H3TGXXXXSXXXXAXBXCXXXXDX	131U8899	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2XXXXXXXXSXXXXAXBXCXXXXDX	131F3119	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102P110T4E54H4XGCXXXSXXXXAXBXCXXXXDX	131F9671	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P132T4E54H2XGCXXXSXXXXAXBXCXXXXDX	131L4910	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P5K5T2E20H2XNXXXXSXXXXAGBXCVXXXXDX	131Z7364	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P7K5T2E20H2XNXXXXSXXXXAGBXCVXXXXDX	131Z7363	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P11KT2E20H2XNXXXXSXXXXAGBXCVXXXXDX	131Z7362	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P15KT2E20H2XNXXXXSXXXXAGBXCVXXXXDX	131Z7361	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H2XGXXXXSXXXXA0BXCXXXXDX	131G0611	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E55H3XGXXXXSXXXXAXBXCXXXXDX	131B6976	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 525 - 690 VAC *, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N200T7E20H2TGCXXXSXXXXAXBXCXXXXDX	134L0398	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P450T4E54H2TGC3XXSXXXXAXBXCXXXXDX	131L2852	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H2XXXXXXXXSXXXXAXBXCXXXXDX	131B4991	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H2XXXXXXXXSXXXXAXBXCXXXXDX	131B4993	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H1XGXXXXSXXXXA0BXCXXXXDX	131F9850	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H2XXXXXXXXSXXXXAXBXCXXXXDX	131B4995	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H2XXXXXXXXSXXXXAXBXCXXXXDX	131B4997	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H2XXXXXXXXSXXXXAXBXCXXXXDX	131B4996	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N132T4E20H2UGCXXXSXXXXA0BXCXXXXDX	134G5609	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 630 KW / 900 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Fuse FC-102P630T4E54H2XGC7XKSXXXXAXBXCXXXXDX	134G1948	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2TGXXXXSXXXXALBXCXXXXDX	134L8387	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P11KT4E20H2XGCXXXSXXXXAXBXCXXXXDX	131F7949	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H1XXXXXSXXXXA0BXCXXXXDX	131F2086	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P22KT2E20H1XGCXXXSXXXXAGBXCXXXXDX	131Z0127	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N250T4E20H4BGXXXXSXXXXA0BXCXXXXDX	134L6697	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B7004	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), BACnet MCA 109, No B Option, Not coated PCB, Mains Disconnect FC-102P55KT4E55H2TGX1XXSXXXXAJBXCXXXXDX	134U6456	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E21H2XXXXXSXXXXAXBXCXXXXDX	131B5005	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.7 KW / 5.0 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P3K7T2E55H2XNCXXXSXXXXAXBXCXXXXDX	131X1358	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P5K5T2E55H2XNCXXXSXXXXAXBXCXXXXDX	131X1359	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P1K1T2E55H2XNCXXXSXXXXAXBXCXXXXDX	131X1357	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 200 - 240 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P30KT2E21H2XGXXXXSXXXXA0BXCXXXXDX	131F8988	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A1/B (cable len) (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E21H3XGXXXXSXXXXAXBXCXXXXDX	131B8225	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B4978	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B4977	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B4976	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B4975	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P37KT4E20H1XGCXXXSXXXXAGBXCVXXXXDX	131U7068	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P1K1T2E55H1XGCXXXSXXXXAGBXCVXXXXDX	131U7207	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P2K2T2E55H1XGCXXXSXXXXAGBXCVXXXXDX	131U7206	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P11KT2E55H1XGCXXXSXXXXAGBXCVXXXXDX	131U7205	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N315T4E54H4XGCXXXSXXXXA0BXCVXXXXDX	134H4584	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P37KT4E20H2XGCXXXSXXXXAXBXCXXXXDX	131H4027	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P132T4E5MH4XGX3XXSXXXXA0BXCVXXXXDX	131F8254	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E55H1XGXXXXSXXXXAGBXCVXXXXDX	131F0416	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2TGXXXXSXXXXA0BXCXXXXDX	131N0462	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H1XXXXXXSXXXXAXBXCXXXXDX	131B7275	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H1TGXXXXSXXXXA0BXCXXXXD0	131G9314	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P200T4E54H4XGX7XXSXXXXAXBXCXXXXDX	131F9111	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P200T4E5MH2XGXXXXSXXXXAXBKCXXXXDX	131F7604	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P250T4E5MH2XGXXXXSXXXXAXBKCXXXXDX	131F7605	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P110T4E5MH2XGXXXXSXXXXAXBKCXXXXDX	131F7600	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P132T4E5MH2XGXXXXSXXXXAXBKCXXXXDX	131F7602	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P160T4E5MH2XGXXXXSXXXXAXBKCXXXXDX	131F7603	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H1TGXXXXSXXXXAXBXCXXXXDX	131F0803	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI class A1 (C2), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102N315T4E20H4XGCXXXSXXXXAXBKCXXXXDX	134G7240	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P7K5T4E55H1XGCXXXSXXXXAXBXCXXXXDX	131B7189	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H1XXXXXXSXXXXAXBXCXXXXDX	131B7532	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Fuse FC-102P315T4E54H2XGC7XXSXXXXAXBXCXXXXDX	131G5448	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P315T4E5MH4XGC3XXSXXXXAXBXCXXXXDX	131F8006	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P110T4E5MH4XGXXXXSXXXXA0BXCXXXXDX	131F7736	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, Mains Disconnect FC-102P4K0T4E55H1XNX1XXSXXXXAXBXCXXXXDX	131B7536	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H1XXXXXXSXXXXAXBXCXXXXDX	131B7537	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102P450T4E21H4XGCXXXSXXXXAXBXCXXXXDX	131B7432	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E21H1XGXXXXSXXXXAXBXCXXXXDX	131B5839	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P110T4E54H2XGXXXXSXXXXA0BXCXXXXDX	131G1211	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P450T4E00H2XGCXXXSXXXXAXBXCXXXXDX	131B7431	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT2E20H2XGXXXXSXXXXA0BXCXXXXDX	131G2739	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H2XXXXXXSXXXXAXBXCXXXXDX	131F3121	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H2XXXXXXXXXXXXAXBXCXXXXDX	131F3120	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), DeviceNet MCA 104, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2XGXXXXSXXXXA4BXCCXXXDX	131G0861	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.7 KW / 5.0 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K7T2E55H1XGXXXXSXXXXAXBXCXXXXDX	131B7638	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2XNXXXXSXXXXA0BXCCXXXDX	131G0735	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H2XNXXXXSXXXXAXBXCXXXXDX	131B7846	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2XNXXXXSXXXXAXBXCXXXXDX	131H3084	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2XNXXXXSXXXXAXBXCXXXXDX	131H3085	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P18KT4E20H1UGCXXSXXXXAXBXCXXXXDX	131H3089	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H1TGXXXXSXXXXAXBXCXXXXDX	131F9848	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E55H2XGXXXXSXXXXA0BXCCXXXDX	131G0818	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E20H2XXXXXXXXXXXXAXBXCXXXXDX	131F3122	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P15KT4E20H2XGCXXSXXXXAXBXCXXXXDX	131F7950	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P18KT4E20H2XGCXXXSXXXXAXBXCXXXXDX	131F7951	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E00H4XGXXXSXXXXAXBXCXXXXD0	131F7953	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, MCB-109 I/O, RTC Back-up, Not coated PCB, No Mains Option FC-102P160T4E21H4XGXXXSXXXXAXB0CXXXXDX	131F7959	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H1XGXXXSXXXXA0BXCXXXXDX	131F9853	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E55H3TGXXXSXXXXA0BXCXXXXDX	134H5743	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E55H1XGXXXSXXXXAXBXCXXXXDX	131B6126	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E00H4XXXXXSXXXXAXBXCXXXXDX	131F8539	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P22KT4E55H1XGXXXSXXXXAXBXCXXXXDX	131B7994	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E21H1XGXXXSXXXXA0BXCXXXXDX	131B9528	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H1XGXXXSXXXXA0BXCXXXXDX	131B9523	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H1XGXXXSXXXXA0BXCXXXXDX	131B9522	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H1XGXXXSXXXXA0BXCXXXXDX	131B9521	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 400 KW / 550 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, LHD - AAF006 filter + A2 RFI, PROFIBUS DP MCA 101, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P400T4E21N2XGC3XXSXXXXA0BXCXXXXDX	134H4804	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, LHD - AAF006 filter + A2 RFI, PROFIBUS DP MCA 101, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P200T4E21N2XGC3XXSXXXXA0BXCXXXXDX	134H4805	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E55H3XGXXXXSXXXXA0BXCXXXXDX	131B8788	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H2XGXXXXSXXXXAXBXCXXXXD0	131Z0345	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P7K5T2E20H1XGXXXXSXXXXAGBXCXXXXDX	131U6670	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P5K5T2E55H1XGXXXXSXXXXAGBXCXXXXDX	131U7079	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P1K1T4E20H1XGXXXXSXXXXAGBXCXXXXDX	131U7072	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P11KT2E55H1XGXXXXSXXXXAXBXCXXXXDX	131F5131	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N110T4E54H2XGXXXXSXXXXA0BXCXXXXDX	134F9206	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, Safe Stop, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Coated PCB, Fuse FC-102N315T4E5MH4TGC7XXSXXXXAXBXCXXXXDX	134G4270	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P5K5T2E20H1XGXXXXSXXXXAGBXCXXXXDX	131U7210	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, Fuse FC-102P132T4E21H2XGX7XXSXXXXAXBXCXXXXDX	131H2163	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P132T4E21H4GXXXXSXXXXAXBXCXXXXDX	131B6934	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P132T4E54H2GXXXXSXXXXAXBXCXXXXDX	131B6937	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P132T4E54H4GXXXXSXXXXAXBXCXXXXDX	131B6936	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT2E20H1GXXXXSXXXXAXBXCXXXXDX	131H5699	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P132T4E00H2GXXXXSXXXXAXBXCXXXXDX	131B6933	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H1TGXXXXSXXXXAXBXCXXXXDX	131F4733	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H2GXXXXSXXXXA0BXCVXXXXDX	131H2008	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E00H2GXXXXSXXXXAXBXCXXXXDX	131B6939	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E00H4GXXXXSXXXXAXBXCXXXXDX	131B6938	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1TGXXXXSXXXXAXBXCXXXXDX	131F4737	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H1TGXXXXSXXXXAXBXCXXXXDX	131F4736	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, MCB-112 PTC Therm. Card, Not coated PCB, No Mains Option FC-102P7K5T4E20H1TXXXXXSXXXXA0B2CXVXXXXDX	134H2619	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E66H2GXXXXSXXXXAXBXCXXXXDX	131B7361	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102P200T4E00H2XGCXXXSXXXXAXBKCXXXXDX	131G9303	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102P315T4E21H2XGCXXXSXXXXAXBKCXXXXDX	131F7630	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E20H2XNXXXXSXXXXAXBXCXXXXDX	131H5668	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E55H2TGXXXSXXXXAXBXCXXXXDX	131N7272	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H1XGXXXSXXXXAGBXCCXXXDX	131F1928	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P18KT4E55H1XGCXXXSXXXXAXBXCXXXXDX	131B7192	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H2XGXXXSXXXXAGBXCCXXXDX	131F8019	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P132T4E5MH4XGX3XXSXXXXAXBXCXXXXDX	131F7704	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P200T4E21H2XXXXXXSXXXXAXBXCXXXXDX	131F8549	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102P90KT4E20H2XGCXXXSXXXXAXBKCXXXXDX	131L2507	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H1XGXXXSXXXXAGBXCCXXXDX	131H9498	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H1XGXXXSXXXXAGBXCCXXXDX	131H9495	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H1XGXXXXSXXXXAGBXCXXXXDX	131H9497	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E66H1XGXXXXSXXXXA0BXCXXXXDX	131G1221	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102P160T4E00H2XGCXXXSXXXXAXBKCXXXXDX	131L2509	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H1TGXXXXSXXXXAXBXCXXXXDX	131F3134	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N110T4E20H2XGCXXXSXXXXAXBXCXXXXDX	134F0374	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B4223	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B4222	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B4221	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H1XGXXXXSXXXXAXBXCXXXXDX	131B4220	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B4225	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B4224	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P45KT4E20H2XGXXXXSXXXXAXBKCXXXXDX	131G5085	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H2XGXXXXSXXXXA0BXCXXXXDX	131G2159	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P90KT4E55H1XGXXXXSXXXXAXBKCXXXXDX	131F7569	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 355 KW / 500 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102P355T4E54H4XGCXXXSXXXXA0BXCXXXXDX	131F9871	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E5MH4XGXXXXSXXXXAXBXCXXXXDX	131F7961	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E20H2TGXXXXSXXXXAXBXCXXXXDX	131H7182	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Coated PCB, No Mains Option FC-102N160T4E20H2TGXXXXSXXXXALBXXCXXXXDX	134L5613	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H1XGXXXXSXXXXA0BXCXXXXDX	131F9846	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E20H2XNXXXXSXXXXAXBXCXXXXDX	131H8167	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102P30KT4E55H3XGCXXXSXXXXA0BXCXXXXDX	131L8766	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H1XXXXXXXXSXXXXAGBXXCXXXXDX	131F3248	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H2XGXXXXSXXXXA0BXCXXXXDX	131G0939	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H2XXXXXXXXSXXXXAXBXCXXXXDX	131B4992	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P7K5T4E55H1UGCXXXSXXXXAXBXCXXXXDX	131F3242	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, Mains Disconnect FC-102P1K1T4E55H1XGX1XXSXXXXAXBXCXXXXDX	131B7528	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H1XGX1XXSXXXXAXBXCXXXXDX	131B1277	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P160T4E21H4XGX3XXSXXXXAXBXCXXXXDX	131F7957	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P250T4E54H2XGXXXXSXXXXAXBXCXXXXDX	131B6955	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P250T4E54H4XGX1XXSXXXXAXBXCXXXXDX	131B6954	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H2XNXXXXSXXXXAXBXCXXXXDX	131B6918	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E21H1XGX1XXSXXXXAXBXCXXXXDX	131B1273	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1XGX1XXSXXXXAXBXCXXXXDX	131B9524	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102N200T4E54H2XGC3XXSXXXXAXBXCXXXXDX	134G9095	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102N160T4E54H2XGC3XXSXXXXAXBXCXXXXDX	134G9094	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102P30KT4E66H2XNCXXXSXXXXAXBKCXXXXDX	131U7042	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H2BGXXXXSXXXXAXBXCXXXXDX	131H7161	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N250T4E20H2XGCXXXSXXXXAXBXCXXXXDX	134F0530	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H1TGXXXXSXXXXA0BXCXXXXDX	131G3931	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E20H2BGXXXXSXXXXAXBXCXXXXDX	131H7164	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H3XGXXXXSXXXXALBXKCXXXXDX	134U6275	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102P315T4E5M4XGCXXXSXXXXAXBXCXXXXDX	131F8004	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E21H4XGXXXXSXXXXAXBXCXXXXDX	131B6928	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 525 - 690 VAC *, Safe Stop, IP20 / Chassis, RFI class A1 (C2), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102P45KT7E20H4TGCXXXSXXXXAXBKCXXXXDX	134U6891	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E00H2XGXXXXSXXXXAXBXCXXXXDX	131B6927	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H2XGXXXXSXXXXA0BXCXXXXDX	131F4728	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E20H1XGXXXXSXXXXAXBXCXXXXDX	131F0340	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.7 KW / 5.0 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P3K7T2E55H1XGCXXXSXXXXAXBXCXXXXDX	131B9295	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E55H2TGXXXXSXXXXAXBXCXXXXDX	131G8793	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P15KT4E55H1XGCXXXSXXXXAXBXCXXXXDX	131B6816	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2XGXXXXSXXXXA0BXCXXXXDX	131G0740	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 500 KW / 650 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P500T4E54H2XGCXXXSXXXXAXBXCXXXXDX	131G4864	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 800 KW / 1200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P800T4E54H2XGCXKXSXXXXAXBXCXXXXDX	134U5018	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Coated PCB, No Mains Option FC-102P30KT4E20H2TGCXXXSXXXXALBXXCXXXXDX	134U5010	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1XGXXXXSXXXXAGBXXCXXXXDX	131F1930	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H2XGXXXXSXXXXAGBXXCXXXXDX	131F8023	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B4267	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P110T4E00H2XGXXXXSXXXXA0BXCXXXXDX	131L4589	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102N132T4E20H2XGCXXXSXXXXAGBXXCXXXXDX	134H6072	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H3XGXXXXSXXXXAXBXCXXXXDX	131B5471	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N110T4E20H2XGCXXXSXXXXA0BXCXXXXDX	134F4995	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A1/B (cable len) (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E21H3XGXXXXSXXXXAXBXCXXXXDX	131B5478	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P7K5T4E55H2XGCXXXSXXXXAXBXCXXXXDX	131B4237	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2TGXXXSXXXXALBXCXXXXDX	134L8339	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P160T4E54H2TGC3XXSXXXXA0BXCXXXXD0	134F3186	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P110T4E00H2XGXXXSXXXXAXBKCXXXXDX	131F7572	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P132T4E00H2XGXXXSXXXXAXBKCXXXXDX	131F7573	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P200T4E00H2XGXXXSXXXXAXBKCXXXXDX	131F7576	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2TGXXXSXXXXA0BXCXXXXD0	134F5925	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P200T4E21H2XGCXXXSXXXXAXBXCXXXXDX	131N3743	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P160T4E00H2XGXXXSXXXXAXBKCXXXXDX	131F7575	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P110T4E00H4XGXXXSXXXXAXBKCXXXXDX	131F7579	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P4K0T4E55H1XGCXXXSXXXXAXBXCXXXXDX	131B8430	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, MCB-109 I/O, RTC Back-up, Not coated PCB, No Mains Option FC-102P200T4E21H4XGXXXSXXXXAXB0CXXXXDX	131F7975	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P200T4E21H4XGX3XXSXXXXAXBXCXXXXDX	131F7973	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H2XGXXXXSXXXXALBXXCXXXXDX	131Z7756	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT2E20H2XGXXXXSXXXXAXBXCXXXXDX	131F3505	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-114 VLT Sensor Input, Not coated PCB, No Mains Option FC-102P200T4E00H2XGXXXXSXXXXAXB4CXXXXDX	134G1193	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, Brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E21H4BGXXXXSXXXXAXBXCXXXXDX	131H8997	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H1XXXXXSXXXXAXBXCXXXXDX	131B7535	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 525 - 690 VAC *, No brake chopper, IP54/Type 12 -D1 frame, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N90KT7E5DH2XGCXXXSXXXXA0BXCCXXXXD0	134L0363	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H2XGXXXXSXXXXALBXXCXXXXDX	134H6302	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E21H2XXXXXSXXXXAXBXCXXXXDX	131F8540	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H1XGXXXXSXXXXAXBXCXXXXDX	131F6629	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E55H2TGXXXXSXXXXAXBXCXXXXDX	131G4857	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Safe Stop, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102N160T4E21H4TGC3XXSXXXXAXBXCXXXXDX	134H8853	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H2XXXXXXXXXXXXAXBXCXXXXDX	131F6624	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2XXXXXXXXXXXXAXBXCXXXXDX	131F6623	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2XXXXXXXXXXXXAXBXCXXXXDX	131F6622	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N110T4E20H2BGXXXXSXXXXAXBXCXXXXDX	134G2164	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H1TGXXXXSXXXXA0BXCXXXXDX	131G3928	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H1TGXXXXSXXXXA0BXCXXXXDX	131G3929	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H1TGXXXXSXXXXA0BXCXXXXDX	131G3927	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H2XGXXXXSXXXXA0BXCXXXXDX	131H7176	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T2E20H1XGXXXXSXXXXAXBXCXXXXDX	131F9319	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E66H1XGXXXXSXXXXAXBXCXXXXDX	131B8173	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T2E20H2XGXXXXSXXXXAXBXCXXXXDX	131F9317	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P315T4E21H2XGCXXXSXXXXAXBXCXXXXDX	131B6959	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P315T4E00H2XGCXXXSXXXXAXBXCXXXXDX	131B6957	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H3XGXXXXSXXXXAXBXCXXXXDX	131B1276	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P250T4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B6953	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P250T4E00H2XGXXXXSXXXXAXBXCXXXXDX	131B6951	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H2XGXXXXSXXXXALBXXCXXXXDX	134F1835	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P132T4E00H4XGX7XXSXXXXAXBXCXXXXDX	131F8212	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H2TGXXXXSXXXXA0BXXCXXXXDX	131L1783	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P200T4E21H4XGX7XXSXXXXAXBXCXXXXDX	131F8217	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, Safe Stop, IP21 / Type 1, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P110T4E21H4TGXXXXSXXXXA0BXXCXXXXDX	131F9135	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21/Type 1+mains shield, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P200T4E2MH4XGX3XXSXXXXAXBXCXXXXDX	131F9137	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 525 - 690 VAC *, Safe Stop, IP20 / Chassis, RFI class A1 (C2), EtherNet/IP MCA 121, No B Option, Coated PCB, No Mains Option FC-102P55KT7E20H4TGCXXXSXXXXANBXXCXXXXDX	134U5710	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E20H3XGXXXXSXXXXA0BXXCXXXXDX	131G4453	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H1XGXXXXSXXXXAXBXCXXXXDX	131B4218	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102N315T4E5MH2XGC3XXSXXXXAXBXCXXXXDX	134L0186	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H1XGXXXXSXXXXAXBXCXXXXDX	131B4219	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, Mains Disconnect FC-102P4K0T4E66H1XGX1XXSXXXXAXBXCXXXXDX	131H1722	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, LHD - AAF006 filter + A2 RFI, PROFINET MCA 120, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P250T4E54N2TGC3XXSXXXXALBXJCXXXXDX	134U5008	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Coated PCB, No Mains Option FC-102P15KT4E20H2TGCXXXSXXXXALBXJCXXXXDX	134U5009	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E55H1XGXXXXSXXXXALBXJCXXXXDX	134F4837	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P15KT2E20H2XGCXXXSXXXXAXBXCXXXXDX	131G6742	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P37KT2E20H2XGCXXXSXXXXAXBXCXXXXDX	131G6747	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P11KT4E20H1XGCXXXSXXXXAGBXJCXXXXDX	134N6875	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P55KT4E20H1XGCXXXSXXXXAGBXJCXXXXDX	134N6874	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E21H1XGXXXXSXXXXAXBXCXXXXDX	131B5799	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H3XGXXXXSXXXXA0BXJCXXXXDX	131B9756	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, Safe Stop, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102P315T4E21H4TGCXXXSXXXXAXBXCXXXXDX	131F8727	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E21H2XGXXXSXXXXAXBXCXXXXDX	131B7020	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102N160T4E20H2TGCXXXSXXXXAXBKCXXXXDX	134H8408	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H1XGXXXSXXXXAXBXCXXXXDX	131B4207	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H2BNXXXSXXXXA0BXCCXXXD0	131L0552	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H2BNXXXSXXXXA0BXCCXXXD0	131L0551	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H2BNXXXSXXXXA0BXCCXXXD0	131L0550	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 630 KW / 900 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102P630T4E54H4XGCXXXSXXXXAXBXCXXXXDX	131G8974	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P37KT2E55H1XGCXXXSXXXXAGBXCCXXXDX	131U7077	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P1K5T4E55H1XGCXXXSXXXXAGBXCCXXXDX	131U7070	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E55H1XGXXXSXXXXAXBXCXXXXDX	131B3318	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H1TGXXXSXXXXALBXCCXXXDX	134F4549	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 525 - 690 VAC *, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P18KT7E21H2XGCXXXSXXXXAXBXCXXXXDX	131Z4260	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H1XGXXXXSXXXXA0BXCXXXXDX	131B9424	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E55H2TGXXXXSXXXXAXBXCXXXXDX	131N2405	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H2XGXXXXSXXXXAGBXCCXXXDX	131F0029	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N250T4E20H2XGXXXXSXXXXA0BXCXXXXDX	134F5964	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N160T4E20H2XGXXXXSXXXXA0BXCXXXXDX	134F5966	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H3XGXXXXSXXXXAXBXCXXXXDX	131F9921	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H3XGXXXXSXXXXAXBXCXXXXDX	131F9926	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P132T4E54H2TGXXXXSXXXXAXBXCXXXXDX	131G6042	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, MCB-105 Relay Card, Not coated PCB, No Mains Option FC-102P110T4E21H2XGXXXXSXXXXAXBPCXXXXDX	131F9403	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E55H1XGXXXXSXXXXA0BXCXXXXDX	131B9516	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1XXXXXXXXSXXXXAXBXCXXXXDX	131B7546	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E55H1XGXXXXSXXXXA0BXCXXXXDX	131B9519	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B8595	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B8597	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P55KT4E66H1XNCXXXSXXXAGBCXCXXXXDX	134N8100	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P15KT2E55H1XGCXXXSXXXAGBCXCXXXXDX	131U4484	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N200T4E20H2TGCXXXSXXXXAXBXCXXXXDX	134H0676	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, Loadsharing FC-102P55KT4E20H1UGCDXXSXXXXAXBXCXXXXDX	131H3170	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E20H2BGXXXXSXXXXAXBXCXXXXDX	131H2713	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 525 - 690 VAC *, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P22KT7E21H2XGXXXXSXXXXAXBXCXXXXDX	131Z7388	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N132T4E20H2XXCXXXSXXXXAXBXCXXXXDX	134G0835	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H1XXXXXSXXXXA0BXCXXXXDX	131H4018	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H1XGXXXXSXXXXA0BXCXXXXDX	131H4019	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H1XGXXXXSXXXXAXBXCXXXXDX	131F6632	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H1XGXXXXSXXXXAXBXCXXXXDX	131F6630	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H1XGXXXXSXXXXAXBXCXXXXDX	131F6631	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP55 / Type12 Backplate, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, Loadsharing FC-102P18KT4P55H1UGCDXXSXXXXAXBXCXXXXDX	131L9646	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P132T4E54H2XGXXXXSXXXXA0BXCXXXXDX	131H2557	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P11KT4E55H1XGCXXXSXXXXAXBXCXXXXDX	131B7942	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N110T4E20H2TGCXXXSXXXXAXBXCXXXXDX	134G3059	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E20H2TGXXXXSXXXXAXBXCXXXXDX	131L7798	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E55H2TGXXXXSXXXXA0BXCXXXXDX	131X7033	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E55H2TGXXXXSXXXXA0BXCXXXXDX	131X7032	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2TGXXXXSXXXXAXBXCXXXXDX	131L7797	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H2BGXXXXSXXXXAXBXCXXXXDX	131H0958	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H1XGXXXXSXXXXAGBXCXXXXDX	131B8174	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P200T4E21H4XGXXXXSXXXXAXBXCXXXXDX	131B6946	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E21H4XGXXXXSXXXXAXBXCXXXXDX	131B6940	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E54H2XGXXXXSXXXXAXBXCXXXXDX	131B6943	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102N160T4E54H2TGC3XXSXXXXA0BXCXXXXD0	134L6438	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P22KT4E66H1XGCXXXXSXXXXAXBXCXXXXDX	131F0686	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P37KT4E20H2TGXXXXSXXXXAXBKCXXXXDX	134U5813	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P18KT4E20H2TGXXXXSXXXXAXBKCXXXXDX	134U5812	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H1TGXXXXSXXXXALBXCXXXXDX	134H8573	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102N132T4E21H4XGCXXXXSXXXXAXBXCXXXXDX	134F4249	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P110T4E54H4XGX7XXSXXXXAXBXCXXXXDX	131F9108	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP21 / Type 1, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E21H1TGXXXXSXXXXA0BXCXXXXDX	131L0553	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P11KT4E20H2TGXXXXSXXXXAXBKCXXXXDX	131U6918	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H1TGXXXXSXXXXALBXCXDDX	134N6136	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P45KT4E20H2TGXXXXSXXXXAXBKCXXDX	131U6919	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H1XGXXXXSXXXXAGBXCXDDX	131H1281	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E54H4XGXXXXSXXXXAXBXCXXDX	131B6930	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), EtherNet/IP MCA 121, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E55H3XGXXXXSXXXXANBXCXDDX	134U0448	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 800 KW / 1200 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P800T4E54H2TGCXKXSXXXXAXBXCXXDX	134U5929	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E55H2XNXXXXSXXXXAXBXCXXDX	131F0607	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H3XGXXXXSXXXXA0BXCXDDX	131F3861	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, LHD - AAF006 filter + A2 RFI, PROFINET MCA 120, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P450T4E54N2XGC3XXSXXXXALBXCXDDX	134L2550	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H2XGXXXXSXXXXA0BXCXDDX	131F6461	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H1XGXXXXSXXXXAGBXCXDDX	131F1910	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H3XGXXXXSXXXXAXBXCXXDX	131G0433	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E21H4XGXXXXSXXXXAXBXCXXXXD0	131F7779	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P110T4E21H4XGX3XXSXXXXAXBXCXXXXDX	131F7776	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E20H2TGXXXXSXXXXAXBXCXXXXDX	131G9739	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E00H4XGXXXXSXXXXAXBXCXXXXD0	131F7773	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P75KT4E20H2XGXXXXSXXXXAXBKCXXXXDX	131G5086	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B7025	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E00H4XGXXXXSXXXXAXBXCXXXXDX	131B6549	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B7015	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Mains Disconnect FC-102P55KT4E55H2TGC1XXSXXXXAXBXCXXXXDX	134N4351	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), EtherNet/IP MCA 121, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H1TGXXXXSXXXXANBXKCXXXXDX	134G8018	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P315T4E5MH2XGC3XXSXXXXAXBXCXXXXDX	131F8197	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H1XGXXXXSXXXXAXBXCXXXXDX	131B4217	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP21 / Type 1, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P132T4E21H2UGXXXXSXXXXA0BXCXXXXDX	134G6403	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H1XGXXXXSXXXXAXBXCXXXXDX	131B5945	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Fuse FC-102P200T4E21H2XGC7XXSXXXXAXBXCXXXXDX	131G6379	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E55H3XGXXXXSXXXXA0BXCXXXXDX	131H8426	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2XGXXXXSXXXXA0BXCXXXXD0	131U9208	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P110T4E21H4XGX7XXSXXXXAXBXCXXXXDX	131F8211	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P250T4E5MH4XGX3XXSXXXXAXBXCXXXXDX	131F7992	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102P315T4E00H4XGCXXXSXXXXAXBXCXXXXD0	131F7995	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E55H3XGXXXXSXXXXA0BXCXXXXDX	131H3602	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1TGXXXXSXXXXALBXKCXXXXDX	134F4550	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1XNXXXXSXXXXAXBXCXXXXDX	131B5595	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102N132T4E20H2TGCXXXSXXXXAXBKCXXXXDX	134H8407	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H1XNXXXXSXXXXAXBXCXXXXDX	131B6768	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, Brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, Fuse FC-102P110T4E54H4BGX7XXSXXXXA0BXCCXXXD0	131U6860	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E66H2XGXXXXSXXXXAXBXCXXXXDX	131G0791	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, Mains Disconnect FC-102P22KT4E55H1TGX1XXSXXXXAXBXCXXXXDX	131G6027	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H3XGXXXXSXXXXAXBXCXXXXDX	131F9931	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E20H3XGXXXXSXXXXAXBXCXXXXDX	131F9936	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E55H1XGXXXXSXXXXA0BXCCXXXDX	131B9564	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T4E20H1TXXXXXSXXXXAXBXCXXXXDX	131G3279	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E55H1XGXXXXSXXXXA0BXCCXXXDX	131B9561	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P75KT4E20H2XGCXXXSXXXXAXBXCXXXXDX	131H3267	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, Brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N110T4E54H2BGCXXXSXXXXAXBXCXXXXDX	134H0168	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 525 - 690 VAC *, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P11KT7E21H2XGCXXXSXXXXAXBXCXXXXDX	131Z0945	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H2TGXXXXSXXXXA0BXCXXXXDX	131N2676	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H2TGXXXXSXXXXA0BXCXXXXDX	131N2674	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H2BGXXXXSXXXXAXBXCXXXXDX	131H7159	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H3GXXXXSXXXXA0BXCXXXXDX	131H4607	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B1271	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT2E20H1XGXXXXSXXXXAXBXCXXXXDX	131H3795	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H1XXXXXSXXXXA0BXCXXXXDX	131H2735	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 400 KW / 550 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P400T4E54H2XGCXXXSXXXXAXBXCXXXXDX	131B6973	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H1TGXXXXSXXXXA0BXCXXXXDX	131L2231	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N200T4E20H2XGCXXXSXXXXAXBXCXXXXDX	134F0389	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B6204	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N160T4E20H2XGCXXXSXXXXAXBXCXXXXDX	134F0386	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102N132T4E54H4XGCXXXSXXXXAXBXCXXXXDX	134F0385	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102N132T4E20H4XGCXXXSXXXXAXBXCXXXXDX	134F0384	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N132T4E20H2XGCXXXSXXXXAXBXCXXXXDX	134F0383	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102N110T4E54H2XGCXXXSXXXXAXBKCXXXXDX	134F0381	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N110T4E54H2XGCXXXSXXXXAXBXCXXXXDX	134F0380	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P1K5T4E55H1XNCXXXSXXXXAGBCXCXXXXDX	134L1342	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H1TGXXXSXXXXA0BXCXXXXD0	131G9300	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H3XGXXXSXXXXA0BXCXXXXDX	131H6878	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P250T4E54H4XGX7XXSXXXXAXBXCXXXXDX	131F9112	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, Fuse FC-102P315T4E54H4XGC7XXSXXXXAXBXCXXXXDX	131F9113	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P160T4E54H4XGX7XXSXXXXAXBXCXXXXDX	131F9110	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Fuse FC-102N200T4E20H2XGC7XXSXXXXAXBXCXXXXDX	134F8458	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P160T4E54H4XGXXXSXXXXA0BXCXXXXDX	131H6048	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E55H3XGXXXXSXXXXA0BXCXXXXDX	131H0097	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, Fuse FC-102P450T4E54H4TGC7XXSXXXXAXBXCXXXXDX	131H8360	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H1XXXXXSXXXXA0BXCXXXXDX	131H2815	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102N200T4E54H2XGC3XXSXXXXA0BXCXXXXDX	134N2910	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P45KT2E20H1XGCXXXSXXXXAGBXCVXXXXDX	131Z0054	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E20H1XGXXXXSXXXXAXBXCXXXXDX	131F0341	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E20H1XGXXXXSXXXXAXBXCXXXXDX	131F0342	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E20H1XGXXXXSXXXXAXBXCXXXXDX	131F0343	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P18KT2E20H1XGCXXXSXXXXAGBXCVXXXXDX	131Z0053	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Fuse FC-102P160T4E21H2XGC7XXSXXXXAXBXCXXXXDX	131Z8491	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, Loadsharing FC-102P30KT2E20H1XGXDXSXXXXAXBXCXXXXDX	134H3039	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P250T4E00H4XGX3XXSXXXXAXBXCXXXXDX	131F7982	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B7008	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P90KT4E55H1XGCXXXSXXXXAXBXCXXXXDX	131F8188	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P45KT4E55H1XGXXXXSXXXXAXBKCXXXXDX	131F7340	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H1XGXXXXSXXXXAXBXCXXXXDX	131B3489	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102P132T4E54H4TGCXXXSXXXXAXBXCXXXXDX	131G1399	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H2XNXXXXSXXXXAXBXCXXXXDX	131B9624	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, MCB-109 I/O, RTC Back-up, Not coated PCB, No Mains Option FC-102P22KT4E55H2XGXXXXSXXXXAXB0CXXXXDX	131F8303	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 560 KW / 750 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102P560T4E54H2XGXXXXSXXXXA0BXCCXXXXDX	131L8038	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E20H1XGXXXXSXXXXAGBXCCXXXXDX	131F1929	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H3XGXXXXSXXXXAXBXCXXXXDX	131F8307	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P132T4E21H4XGX3XXSXXXXAXBXCXXXXDX	131F8562	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E55H2XGXXXXSXXXXA0BXCCXXXXDX	131F6344	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H2XGXXXXSXXXXA0BXCXXXXDX	131F6345	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H1TGXXXXSXXXXA0BXCXXXXDX	131H8606	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P160T4E21H4XGXXXXSXXXXA0BXCXXXXDX	131F9908	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E55H1XGXXXXSXXXXA0BXCXXXXDX	131B9574	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E55H1XGXXXXSXXXXA0BXCXXXXDX	131B9575	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, Mains Disconnect FC-102P75KT4E55H2XGX1XXSXXXAXBXCXXXXDX	131F7839	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P45KT4E55H1XGCXXXSXXXXAXBXCXXXXDX	131B7562	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P55KT4E55H2XGCXXXSXXXXAXBXCXXXXDX	131B7565	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E55H1XGXXXXSXXXXA0BXCXXXXDX	131B9573	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H1XGXXXXSXXXXA0BXCXXXXDX	131B8578	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1TGXXXXSXXXXA0BXCXXXXDX	131H8605	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E55H2TGXXXXSXXXXA0BXCXXXXDX	131L7158	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H2TGXXXXSXXXXA0BXCXXXXDX	131L7159	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-109 I/O, RTC Back-up, Coated PCB, No Mains Option FC-102N250T4E20H2XGCXXXSXXXXAXB0CXXXXDX	134L1756	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P37KT2E55H1XGCXXXSXXXXAXBXCXXXXDX	131N3640	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H2TGXXXXSXXXXA0BXCXXXXDX	131X0840	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N315T4E20H2XGCXXXSXXXXAXBXCXXXXDX	134F1124	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-109 I/O, RTC Back-up, Not coated PCB, No Mains Option FC-102P1K1T4E20H2XGXXXXSXXXXAXB0CXXXXDX	131G2869	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E20H1XXXXXSXXXXAXBXCXXXXDX	131B7526	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E21H2BGXXXXSXXXXAXBXCXXXXDX	131F9133	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, Mains Disconnect FC-102P11KT4E55H2XGX1XXSXXXXAXBXCXXXXDX	131B7964	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, Safe Stop, IP21 / Type 1, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E21H4TGXXXXSXXXXAXBXCXXXXDX	131F9134	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H1TGXXXXSXXXXAXBXCXXXXDX	131H4949	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Safe Stop, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, Mains Disconnect + Fuse FC-102P160T4E00H2TGX3XXSXXXXAXBKCXXXXDX	131G3683	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H3TGXXXXSXXXXAXBXCXXXXDX	131B8151	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H1XGXXXXSXXXXAGBXCXXXXDX	131B8620	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102N132T4E5MH4XGC3XQSXXXXA0BXCXXXXDX	134U6580	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 355 KW / 500 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P355T4E54H2XGCXXXSXXXXAXBXCXXXXDX	131B6967	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 355 KW / 500 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P355T4E21H2XGCXXXSXXXXAXBXCXXXXDX	131B6965	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 355 KW / 500 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P355T4E00H2XGCXXXSXXXXAXBXCXXXXDX	131B6963	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P315T4E54H2XGCXXXSXXXXAXBXCXXXXDX	131B6961	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, LHD - AAF006 filter + A2 RFI, PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102P250T4E54N2XGCXXXSXXXXA0BXCXXXXDX	134N1535	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E66H1XGXXXXSXXXXAXBXCXXXXDX	131B6981	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E20H1XGXXXXSXXXXAXBXCXXXXDX	131F0427	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, Safe Stop, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P250T4E00H2TGXXXXSXXXXAXBXCXXXXDX	131N0608	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1TGXXXXSXXXXA0BXCXXXXD0	131F9164	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, Mains Disconnect FC-102P1K5T4E66H1XGX1XXSXXXXAXBXCXXXXDX	131H1719	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Fuse FC-102N200T4E54H2XGC7XXSXXXXAXBXCXXXXDX	134F6900	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, Brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E55H1BGXXXXSXXXXA0BXCXXXXD0	131X3672	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E66H2XGXXXXSXXXXAXBXCXXXXDX	131G0635	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E55H3GXXXXSXXXXA0BXCXXXXDX	131F9041	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P11KT4E21H2XGCXXXSXXXXAXBXCXXXXDX	131F1590	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H1TGXXXXSXXXXA0BXCXXXXD0	131G9249	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, Brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P110T4E54H4BGXXXXSXXXXA0BXCXXXXDX	131H6941	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P15KT4E55H2XNCXXXSXXXXAXBXCXXXXDX	131H0916	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B8593	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P90KT4E55H2XGCXXXSXXXXAXBXCXXXXDX	131H3270	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102N250T4E54H4XGCXXXSXXXXAXBXCXXXXDX	134F4264	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H1XGXXXXSXXXXAGBXCCXXXDX	131H9496	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, No Mains Option FC-102N315T4E54H4XGCXXXSXXXXAXBXCXXXXDX	134F4265	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N315T4E54H2XGCXXXSXXXXAXBXCXXXXDX	134F4266	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E55H2XGCXXXSXXXXAGBXCCXXXDX	131H9750	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N250T4E54H2XGCXXXSXXXXAXBXCXXXXDX	134F4263	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N132T4E54H4XGCXXXSXXXXA0BXCCXXXDX	134G7777	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Coated PCB, Fuse FC-102P315T4E00H4XGC7XXSXXXXAXBXCXXXXDX	131F7687	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P30KT4E55H2XGCXXXSXXXXAXBXCXXXXDX	131B4271	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P22KT4E55H2XGCXXXSXXXXAXBXCXXXXDX	131B4272	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H2TGXXXXSXXXXAXBXCXXXXDX	131G6772	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H2TGXXXXSXXXXAXBXCXXXXDX	131G6770	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP55 / Type12 Backplate, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P7K5T4P55H1UGCXXXSXXXXAXBXCXXXXDX	131L9645	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Safe Stop, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E00H2TGXXXXSXXXXAXBXCXXXXDX	131G6774	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H2TGXXXXSXXXXAXBXCXXXXDX	131G6775	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (cable len)(C1), PROFINET MCA 120, No B Option, Coated PCB, No Mains Option FC-102P30KT4E20H3TGCXXXSXXXXALBXCXDD0	134U7354	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (cable len)(C1), PROFINET MCA 120, No B Option, Coated PCB, No Mains Option FC-102P18KT4E20H3TGCXXXSXXXXALBXCXDD0	134U7355	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N200T4E54H4XGCXXXSXXXXA0BXCXXXXDX	134G7404	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E55H1XGXXXXSXXXXAXBXCXXXXDX	131B4268	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E55H3XGXXXXSXXXXAXBXCXXXXDX	131B9364	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E21H1XGXXXXSXXXXAXBXCXXXXDX	131B6182	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E21H1XGXXXXSXXXXAXBXCXXXXDX	131B6184	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102P90KT4E20H1TGCXXXSXXXXA0BXCXXXXD0	131N2472	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P7K5T4E20H1UGCXXXSXXXXAXBXCXXXXDX	131F3239	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, No Mains Option FC-102P4K0T4E20H1UGCXXXSXXXXAXBXCXXXXDX	131F3238	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P110T4E5MH2XGX3XXSXXXXAXBXCXXXXDX	131F7829	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T2E20H2XGXXXXSXXXXAXBXCXXXXDX	131F5458	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E55H3XGXXXXSXXXXA0BXCXXXXDX	131F6489	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H1XGXXXXSXXXXA0BXCXXXXDX	131H4597	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P11KT2E20H2XGXXXXSXXXXAXBXCXXXXDX	131F5460	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102P450T4E21H2XGXXXSXXXXA0BXCXXXXDX	134F7184	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 200 - 240 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT2E21H2XGXXXXSXXXXAXBXCXXXXDX	131B8707	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E21H2XGXXXXSXXXXA0BXCXXXXDX	131F6462	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, MCB-114 VLT Sensor Input, Coated PCB, Mains Disconnect + Fuse FC-102N250T4E54H2TGC3XXSXXXXA0B4CXXXXD0	134N7585	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, Safe Stop, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P132T4E00H2TGXXXXSXXXXAXBXCXXXXDX	131L2592	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E20H2XGXXXXSXXXXALBXCXXXXDX	134H6311	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E55H1XGXXXXSXXXXALBXCXXXXDX	131Z0855	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, LHD - AAF006 filter + A2 RFI, No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P200T4E54N2XGC3XXSXXXXAXBXCXXXXDX	134F1295	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, Safe Stop, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P315T4E00H2TGCXXXSXXXXAXBXCXXXXDX	131H1874	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), EtherNet/IP MCA 121, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H2XGXXXXSXXXXANBXXCXXXXDX	134H1589	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T4E55H2XXXXXXXXSXXXXAXBXCXXXXDX	131H6261	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, Brake chopper + Safe stop, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Coated PCB, Loadsharing FC-102P37KT4E20H1UGCDXXSXXXXAXBXCXXXXDX	131N0039	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H2TGXXXXSXXXXA0BXXCXXXXDX	131L1453	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P132T4E21H2XGXXXXSXXXXA0BXXCXXXXDX	131G0396	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P110T4E54H2XGXXXXSXXXXAXBXCXXXXDX	131H7885	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, Brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E55H1BGXXXXSXXXXA0BXXCXXXXDX	131H6940	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P22KT4E55H1XGXXXXSXXXXAXBKCXXXXDX	131F1560	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E55H3XGXXXXSXXXXAXBXCXXXXDX	131F1568	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P22KT4E66H1XNCXXX5XXXXAGBXXCXXXXDX	134N8101	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E55H1XGXXXXSXXXXA0BXCXXXXDX	131B9567	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P45KT4E55H2XGXXXXSXXXXAXBKCXXXXDX	131F7329	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P3K0T4E20H2XGCXXXSXXXXAXBXCXXXXDX	131B4241	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P22KT4E55H2XGXXXXSXXXXAXBKCXXXXDX	131F7326	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P5K5T4E20H2XGCXXXSXXXXAXBXCXXXXDX	131B4243	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P250T4E54H2XGCXXXSXXXXAXBXCXXXXDX	131L0189	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H1XGXXXXSXXXXAGBXCCXXXDX	131F0417	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E55H1XGXXXXSXXXXAGBXCCXXXDX	131F0418	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI class A1 (C2), No A Option, MCB-109 I/O, RTC Back-up, Coated PCB, No Mains Option FC-102N250T4E20H4XGCXXXSXXXXAXB0CXXXXDX	134L3340	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Fuse FC-102P250T4E21H2XGC7XXSXXXXAXBXCXXXXDX	131H8412	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T2E20H2XGXXXXSXXXXAXBXCXXXXDX	131B3600	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P7K5T4E20H1XGXXXXSXXXXAXBXCXXXXDX	131B3603	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P110T4E5MH4XGX3XXSXXXXAXBXCXXXXDX	131F7784	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P110T4E5MH4XGXXXXSXXXXAXBXCXXXXDX	131F7782	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B7011	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 90 KW / 125 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (cable len)(C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P90KT4E55H3XGXXXXSXXXXA0BXCXXXXDX	131F9030	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 525 - 690 VAC *, No brake chopper, IP54/Type 12 -D1 frame, RFI filter for Maritime, No A Option, No B Option, Coated PCB, No Mains Option FC-102P45KT7E5DH6XGCXXXSXXXXAXBXCXXXXDX	131G6230	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 400 KW / 550 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102P400T4E54H4XGCXXXSXXXXA0BXCXXXXDX	131F9870	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P45KT4E20H2XGXXXXSXXXXA0BXCXXXXDX	131H5982	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P75KT4E20H2XGXXXXSXXXXA0BXCXXXXDX	131H5981	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E21H2XXXXXXXXSXXXXAXBXCXXXXDX	131F8546	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E00H4XXXXXXXXSXXXXAXBXCXXXXDX	131F8545	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P132T4E21H2XXXXXXXXSXXXXAXBXCXXXXDX	131F8543	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N200T4E54H2XGCXXXSXXXXA0BXCXXXXDX	134H3241	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E55H1XGXXXXSXXXXA0BXCXXXXDX	131B9557	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54/Type 12+main shield, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, Mains Disconnect + Fuse FC-102P132T4E5MH2XGX3XXSXXXXAXBXCXXXXDX	131F7815	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P200T4E54H4XGXXXXSXXXXAXBXCXXXXDX	131B6948	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, MCB-109 I/O, RTC Back-up, Not coated PCB, No Mains Option FC-102P132T4E21H2XGXXXXSXXXXAXB0CXXXXDX	131F7811	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P132T4E21H2XGXXXXSXXXXAXBXCXXXXD0	131F7810	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P200T4E54H2XGXXXXSXXXXAXBXCXXXXDX	131B6949	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P200T4E00H2XGXXXXSXXXXAXBXCXXXXDX	131B6945	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P200T4E21H2XGXXXXSXXXXAXBXCXXXXDX	131B6947	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 5.5 KW / 7.5 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P5K5T2E55H1XGXXXXSXXXXAXBXCXXXXDX	131B8733	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P160T4E54H4XGXXXXSXXXXAXBXCXXXXDX	131B6942	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P45KT4E66H2XGCXXXSXXXXAXBXCXXXXDX	134N3361	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P22KT4E20H1XXXXXXXXXXXXA0BXCXXXXDX	131H7107	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, Safe Stop, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P55KT4E55H2TGXXXXSXXXXAXBXCXXXXDX	131U3074	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P1K1T4E55H1XNCXXXSXXXAGBXCCXXXDX	131U7775	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-105 Relay Card, Coated PCB, No Mains Option FC-102N160T4E20H2TGCXXXSXXXAXBPCXXXXDX	134U7588	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, Safe Stop, IP54/Type 12+main shield, RFI class A1 (C2), No A Option, No B Option, Coated PCB 3C3 + Ruggedise, Fuse FC-102N160T4E5MH4TGR7XXSXXXAXBXCXXXXDX	134H3257	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H2XGXXXSXXXAGBXCCXXXDX	131G9845	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H1XGXXXSXXXALBXCCXXXDX	131Z1134	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 500 KW / 650 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Coated PCB, No Mains Option FC-102P500T4E54H2XGCXXXSXXXAXBKCXXXXDX	134L1264	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Coated PCB, No Mains Option FC-102P450T4E00H2XGCXXXSXXXALBXCCXXXDX	134L0854	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E55H1XGXXXSXXXXA0BXCXXXXDX	131B9352	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H1XGXXXSXXXALBXCCXXXDX	134F2893	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFINET MCA 120, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H2TGXXXSXXXALBXCCXXXDX	134L2282	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P200T4E54H2XGC3XXSXXXAXBXCXXXXDX	131G8427	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 37 KW / 50 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P37KT2E55H1XGXXXXSXXXXAGBXCXXXXDX	131U3292	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, MCB-109 I/O, RTC Back-up, Not coated PCB, No Mains Option FC-102P75KT4E55H2XGXXXXSXXXXAXB0CXXXXDX	131F8304	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 4.0 KW / 5.5 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P4K0T4E20H1XXXXXXXXXXXXA0BXCXXXXDX	131F1773	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (cable len)(C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H3XGXXXXSXXXXAXBXCXXXXDX	131F8308	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 500 KW / 650 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RCD TN/TT Mains+ A2 RFI, PROFIBUS DP MCA 101, No B Option, Coated PCB, Circuit Breaker + Fuse FC-102P500T4E54HEXGCJXXSXXXXA0BXCXXXXDX	134U4079	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 22 KW / 30 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P22KT2E20H2XGXXXXSXXXXAXBXCXXXXDX	131H5694	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, LHD - AAF006 filter + A2 RFI, PROFINET MCA 120, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102P450T4E54N2TGC3XXSXXXXALBXCXXXXDX	134N8765	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102P450T4E54H2XGCXXXSXXXXA0BXCXXXXDX	131X3572	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 630 KW / 900 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P630T4E54H2XGCXXXSXXXXAXBXCXXXXDX	131G5110	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P37KT4E20H2TGXXXXSXXXXA0BXCXXXXD0	131X3170	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H2TGXXXXSXXXXA0BXCXXXXD0	131X3172	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 250 KW / 350 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Coated PCB, Fuse FC-102P250T4E54H4TGC7XXSXXXXAXBXCXXXXDX	131Z0235	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 45 KW / 60 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P45KT4E20H1XGCXXXSXXXXAGBXCXXXXDX	134N6950	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 500 KW / 650 HP, 525 - 690 VAC *, Safe Stop, IP00 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P500T7E00H2TGCXXXSXXXXAXBXCXXXXDX	131G9607	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), No A Option, No B Option, Not coated PCB, Fuse FC-102P132T4E54H4XGX7XXSXXXXAXBXCXXXXDX	131F9109	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102N132T4E20H2TGCXXXSXXXXAXBXCXXXXDX	134G1214	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 160 KW / 250 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P160T4E54H2XGCXXXSXXXXAXBXCXXXXDX	131L4912	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E55H2XGXXXXSXXXXAGBXCXXXXDX	131H9745	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P15KT4E20H2TGCXXXSXXXXAXBXCXXXXDX	131G6771	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P15KT4E55H1XGXXXXSXXXXAXBKCXXXXDX	131F7338	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P30KT4E55H1XGXXXXSXXXXAXBKCXXXXDX	131F7339	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P7K5T4E55H1XGXXXXSXXXXAXBKCXXXXDX	131F7336	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 55 KW / 75 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P55KT4E55H2XGXXXXSXXXXAXBKCXXXXDX	131F7330	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 75 KW / 100 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, MCB-101 General purp. I/O, Not coated PCB, No Mains Option FC-102P75KT4E55H2XGXXXXSXXXXAXBKCXXXXDX	131F7331	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-109 I/O, RTC Back-up, Coated PCB, No Mains Option FC-102N200T4E20H2XGCXXXSXXXXAXB0CXXXXDX	134L4819	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), LonWorks MCA 108, No B Option, Coated PCB, No Mains Option FC-102P2K2T4E20H1XGCXXXSXXXXAGBXCCCCDX	131U7420	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 200 KW / 300 HP, 380 - 480 VAC, Safe Stop, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, Mains Disconnect + Fuse FC-102N200T4E54H2TGC3XXSXXXXA0BXCXXXXD0	134U0550	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 11 KW / 15 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), LonWorks MCA 108, No B Option, Not coated PCB, No Mains Option FC-102P11KT4E55H2XGXXXXSXXXXAGBXCCCCDX	131H9751	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.1 KW / 1.5 HP, 380 - 480 VAC, No brake chopper, IP66 / NEMA 4X, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K1T4E66H2XGXXXXSXXXXAXBXCXXXXD0	131B7639	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 200 - 240 VAC, No brake chopper, IP55 / Type 12, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T2E55H1XGXXXXSXXXXAXBXCXXXXD0	131B7631	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 2.2 KW / 3.0 HP, 200 - 240 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P2K2T2E20H1XGXXXXSXXXXAXBXCXXXXD0	131B7630	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI class A1 (C2), PROFIBUS DP MCA 101, No B Option, Not coated PCB, Fuse FC-102P110T4E54H4XGX7XXSXXXXA0BXCXXXXD0	131U8821	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N315T4E20H2TGCXXXSXXXXA0BXCXXXXD0	134H0217	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 110 KW / 150 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N110T4E20H2TGCXXXSXXXXA0BXCXXXXD0	134H0218	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 1.5 KW / 2.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A1/B (C1), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P1K5T4E20H1XXXXXXSXXXXAXBXCXXXXD0	131B7529	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 450 KW / 600 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P450T4E54H2XGCXXXSXXXXAXBXCXXXXD0	131B7435	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 132 KW / 200 HP, 380 - 480 VAC, No brake chopper, IP00 / Chassis, RFI Class A2 (C3), No A Option, MCB-109 I/O, RTC Back-up, Not coated PCB, No Mains Option FC-102P132T4E00H2XGXXXXSXXXXAXB0CXXXXDX	131F7807	<a href="#">Buy on EAN</a>

VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, Safe Stop, IP20 / Chassis, RFI Class A1/B (C1), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E20H1TGXXXXSXXXXA0BXCXXXXD0	131L8447	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 15 KW / 20 HP, 525 - 690 VAC *, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, No Mains Option FC-102P15KT7E21H2XGCXXXSXXXXAXBXCXXXXDX	131Z1905	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 30 KW / 40 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P30KT4E21H2XGXXXXSXXXXA0BXCXXXXDX	131B9490	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 37 KW / 50 HP, 380 - 480 VAC, No brake chopper, IP55 / Type 12, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, Mains Disconnect FC-102P37KT4E55H2XGX1XXSXXXXAXBXCXXXXDX	131H0272	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP54 / Type 12, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Coated PCB, No Mains Option FC-102N315T4E54H2XGCXXXSXXXXA0BXCXXXXDX	134L9245	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 315 KW / 450 HP, 380 - 480 VAC, No brake chopper, IP21 / Type 1, RFI Class A2 (C3), No A Option, No B Option, Coated PCB, Fuse FC-102P315T4E21H2XGC7XXSXXXXAXBXCXXXXDX	131H8406	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 18.5 KW / 25 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), PROFIBUS DP MCA 101, No B Option, Not coated PCB, No Mains Option FC-102P18KT4E20H2XXXXXSXXXXA0BXCXXXXDX	131H3829	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 7.5 KW / 10 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, MCB-109 I/O, RTC Back-up, Not coated PCB, No Mains Option FC-102P7K5T4E20H2XGXXXXSXXXXAXB0CXXXXDX	131F5889	<a href="#">Buy on EAN</a>
VLT® HVAC Drive FC 102 3.0 KW / 4.0 HP, 380 - 480 VAC, No brake chopper, IP20 / Chassis, RFI Class A2 (C3), No A Option, No B Option, Not coated PCB, No Mains Option FC-102P3K0T4E20H2XNXXXXSXXXXAXBXCXXXXDX	131B7911	<a href="#">Buy on EAN</a>