DIMENSION LIGHT GRIDS

DS2 AREAscan™ detection and measurement light grids with serial or Ethernet interface

- 6 or 25 mm resolution
- Relative measurement precision ± 6 mm or ± 22.5 mm
- 150 1650 mm controlled heights
- Operating distance up to 10 m
- PNP and 0-10 V Analog output and RS485 or Ethernet interface



APPLICATIONS

-Processing and Packaging machinery


- -Food, Cosmetic, Pharmaceutical
- -Electronics and mechanical assembling -Conveyor lines and sorting systems



DS2				
Light array (controlled height)		1501650 mm		
Resolution	625 mm			
Number of beams	21231 (res=6mm)			
Number of Dearns	666 (res= 25mm)			
Light emission		IR LED		
Response time		590 ms		
Interface		serial RS485 or Ethernet		
Catting		Dip-switches		
Setting		Graphic interface		
		0,35 m (res= 6mm)		
Operating distance		0,310 m (res=25mm)		
	Vdc	24V+/- 20%		
Power supply	Vac			
	Vac/dc			
	PNP	•		
	NPN			
Output	NPN/PNP			
	relay			
	other	010 V Analog output		
	cable			
Connection	connector	•		
	pig-tail			
Approximate dimensions (mm)		35x40x(2561726)		
Housing material		aluminium		
Mechanical protection		IP65		

	TECHNICAL DATA			
Power supply	24 Vdc ± 20%			
Consumption on emitter unit (TX)	250 mA max. load excluded			
Light emission	IR LED 880 nm			
Output	PNP; analog output			
Output current	100 mA			
Saturation voltage	1,5 V max.			
Connection	M12 4-pole connector (TX), M12 8-pole and M12 4-pole type "D" connector (RX)			
Dielectric strength	500 Vac, 1 min between electronics and housing			
Insulating resistance	$>\!20~\text{M}\Omega,$ 500 Vdc between electronics and housing			
Electrical protection	class I			
Mechanical protection	IP65 (EN 60529)			
Vibrations	0,5 mm amplitude, 10 55 Hz frequency, for every axis (EN60068-2-6)			
Shock resistance	11 ms (30 G) 6 shock for every axis (EN60068-2-27)			
Housing material	painted aluminium (Pulverit 5121/0085 Black)			
Lens material	PMMA			
Operating temperature	0 50 °C			
Storage temperature	-25 55 °C			
Weight	1,9 - 4,6 kg			


DIMENSIONS

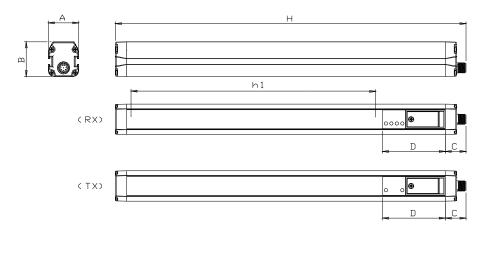

MODEL	A x B (mm)	H (mm)	C (mm)	D (mm)			
DS2-05-07-015-XX	35 x 40	256	23.8	72.5			
DS2-05-07-030-XX	35 x 40	403	23.8	72.5			
DS2-05-07-045-XX	35 x 40	550	23.8	72.5			
DS2-05-07-060-XX	35 x 40	697	23.8	72.5			
DS2-05-07-075-XX	35 x 40	844	23.8	72.5			
DS2-05-07-090-XX	35 x 40	991	23.8	72.5			
DS2-05-07-105-XX	35 x 40	1138	23.8	72.5			
DS2-05-07-120-XX	35 x 40	1285	23.8	72.5			
DS2-05-07-135-XX	35 x 40	1432	23.8	72.5			
DS2-05-07-150-XX	35 x 40	1579	23.8	72.5			
DS2-05-07-165-XX	35 x 40	1726	23.8	72.5			
DS2-05-07-045-XX	35 x 40	562	23.8	72.5			
DS2-05-07-060-XX	35 x 40	713	23.8	72.5			
DS2-05-07-075-XX	35 x 40	864	23.8	72.5			
DS2-05-07-090-XX	35 x 40	1015	23.8	72.5			
XX: JV for serial models or JE for ETHERNET models							


CONNECTIONS

M12 CONNECTOR - SERIAL VERSION

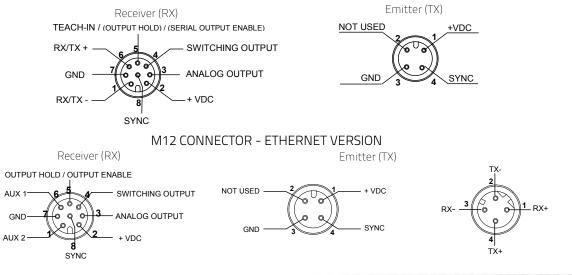


DIMENSION LIGHT GRIDS

INDICATORS AND SETTING

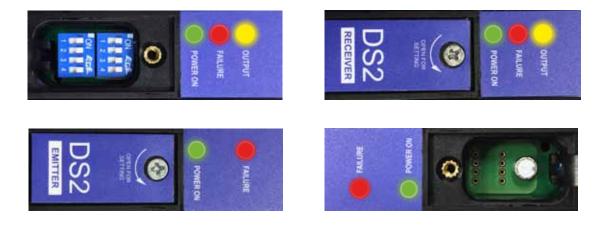

DETECTION MODE EXAMPLES

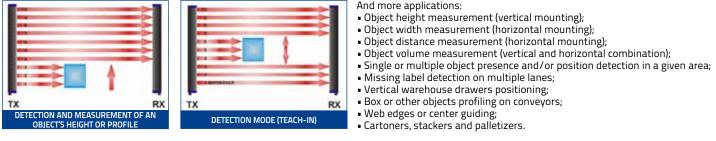

And more applications:

RESPONSE TIME - SERIAL AND ETHERNET VERSION

	Tmin (msec)							Tmax (msec
		T2	T3	T4	T5	T6	T7	
		CONFIGURATION						
MODEL		Тор	beam		Complete beams status			
MODEL	Binary	Binary	ASCII	ASCII	Binary	Binary	ASCII	ASCII
	57600 baud	9600 baud	57600 baud	9600 baud	57600 baud	9600 baud	57600 baud	9600 baud
DS2-05-07-015-JV	5.5	12.5	5.05	13	5.5	15	6.5	10
DS2-05-07-030-JV	7	14	7	14.5	7	18	8.5	21
DS2-05-07-045-JV	8.5	15.5	8.5	16	8.5	21	10	24
DS2-05-07-060-JV	10	17	10	18	10	26	12	38
DS2-05-07-075-JV	11.5	18.5	11.5	19	11.5	31	15	44
DS2-05-07-090-JV	13	20	13	20	13	36	17	54
DS2-05-07-105-JV	14.5	21.5	14.5	22	14.5	40	19	62
DS2-05-07-120-JV	17	24	17	24	17	44	21	70
DS2-05-07-135-JV	18.5	25	19	26	19	48	23	80
DS2-05-07-150-JV	20	26.5	21	28	21	53	25	84
DS2-05-07-165-JV	22	28	23	30	23	56	28	91
DS2-05-07-045-JV	5	11	5	11	5	13	6	18
DS2-05-07-060-JV	5.5	12	5.5	12.5	5.5	14.5	6.5	19.5
DS2-05-07-075-JV	6	13	6	13.5	6	16	7	21
DS2-05-07-090-JV	6.5	13.5	6.5	14.5	6.5	17.5	7.5	22.5
		CONFIGURATION						
MODEL		Tas been						

MODEL	Тор	beam	Complete beams status				
	Binary	ASCII	Binary	ASCII			
DS2-05-07-060-JE	10	10	10	12			
DS2-05-07-075-JE	11.5	11.5	11.5	15			
DS2-05-07-090-JE	13	13	13	17			
DS2-05-07-120-JE	17	17	17	21			
DS2-05-07-150-JE	20	21	21	25			
DS2-05-07-165-JE	22	23	23	28			

MODEL SELECTION AND ORDER INFORMATION

OPTIC FUNCTION	CONTROLLED AREA (mm)	OPTICS INTERAXIS (mm)	OUTPUT	MODEL	ORDER No.
	147			DS2-05-07-015-JV	957501040
	294			DS2-05-07-030-JV	957501050
	441			DS2-05-07-045-JV	957501060
	588			DS2-05-07-060-JV	957501000
	735			DS2-05-07-075-JV	957501070
	882	6.75		DS2-05-07-090-JV	957501010
	1029			DS2-05-07-105-JV	957501080
	1176		Voltage Analog and RS485	DS2-05-07-120-JV	957501020
	1323			DS2-05-07-135-JV	957501090
Measurement	1470			DS2-05-07-150-JV	957501100
light curtain	1617			DS2-05-07-165-JV	957501030
	453	25		DS2-05-25-045-JV	957501110
	604			DS2-05-25-060-JV	957501140
	755			DS2-05-25-075-JV	957501120
	912			DS2-05-25-090-JV	957501130
	588			DS2-05-07-060-JE	957501150
	735			DS2-05-07-075-JE	957501160
	882	6.75	Voltage Apaleg and Ethernet	DS2-05-07-090-JE	957501170
	1176		Voltage Analog and Ethernet	DS2-05-07-120-JE	957501180
	1470			DS2-05-07-150-JE	957501190
	1617			DS2-05-07-165-JE	957501200

CABLES

TYPE	DESCRIPTION	LENGTH	MODEL	ORDER No.
		3 m	CS-A1-02-G-03	95A251380
	4-pole, grey, P.V.C.	5 m	CS-A1-02-G-05	95A251270
		10 m	CS-A1-02-G-10	95A251390
		2 m	CS-A1-02-R-02	95A251540
	4-pole, P.U.R.	5 m	CS-A1-02-R-05	95A251560
		3 m	CS-A1-06-B-03	95ACC2230
	8-pole, black, P.V.C.	5 m	CS-A1-06-B-05	95ACC2240
		10 m	CS-A1-06-B-10	95ACC2250
		3 m	CV-A1-22-B-03	95ACC1480
	4-pole, shielded, grey, P.V.C.	5 m	CV-A1-22-B-05	95ACC1490
		10 m	CV-A1-22-B-10	95ACC1500
		3 m	CV-A1-26-B-03	95ACC1510
		5 m	CV-A1-26-B-05	95ACC1520
	8-pole, shielded, black, P.V.C.	10 m	CV-A1-26-B-10	95ACC1530
Axial M12 Connector		15 m	CV-A1-26-B-15	95ACC2080
	-	25 m	CV-A1-26-B-25	95ACC2100
		3 m	CS-A1-02-U-03	95ASE1120
		5 m	CS-A1-02-U-05	95ASE1130
	4-pole, U.L., black, P.V.C.	10 m	CS-A1-02-U-10	95ASE1140
		15 m	CS-A1-02-U-15	95ASE1150
		25 m	CS-A1-02-U-25	95ASE1160
		3 m	CS-A1-06-U-03	95ASE1220
		5 m	CS-A1-06-U-05	95ASE1230
		10 m	CS-A1-06-U-10	95ASE1240
	8-pole, U.L., black, P.V.C.	15 m	CS-A1-06-U-15	95ASE1250
		25 m	CS-A1-06-U-25	95ASE1260
		50 m	CS-A1-06-U-50	95A252710
	4-pole, black	Connector-not cabled	CS-A1-02-B-NC	G5085002
	8-pole, black	Connector-not cabled	CS-A1-06-B-NC	95ACC2550