









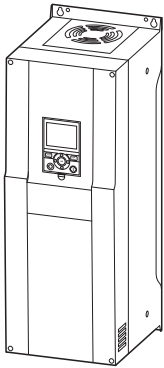




Ordering

	Rated operational current of frequency inverter ¹⁾	Assigned motor rating (50/60 Hz) ²⁾	Rated operational current motor	Part no. Article no.	Price See price list	Std. pack	Part no. Article no.	Price See price list	Std. pack
	I _e A	P kW	I _e A						
Rated operational voltage 3 AC 230 V									
	3.7	0.55	2.7	HMX32AG3D721-B 127151		1 off  	HMX32AG3D722-B 127170		1 off  
	4.8	0.75	3.2	HMX32AG4D821-B 127152			HMX32AG4D822-B 127171		
	6.6	1.1	4.6	HMX32AG6D621-B 127153			HMX32AG6D622-B 127172		
	8	1.5	6.3	HMX32AG8D021-B 127154			HMX32AG8D022-B 127173		
	11	2.2	8.7	HMX32AG01121-B 127155			HMX32AG01122-B 127174		
	12.5	3	11.5	HMX32AG01221-B 127156		1 off  	HMX32AG01222-B 127175		1 off  
	18	4	14.8	HMX32AG01821-B 127157			HMX32AG01822-B 127176		
	24.2	5.5	19.6	HMX32AG02421-B 127158			HMX32AG02422-B 127177		
	31	7.5	26.4	HMX32AG03121-B 127159			HMX32AG03122-B 127178		
		48	11	38	HMX32AG04821-B 127160			1 off  	
62		15	51	HMX32AG06221-B 127161		HMX32AG06222-B 127180			

Notes

¹⁾ Rated operational current at an operating frequency of 6 kHz and an ambient temperature of +40 °C

²⁾ Assigned motor rating for normal internally and externally ventilated four-pole, three-phase asynchronous motors with 1500 rpm (at 50 Hz) or 1800 rpm (at 60 Hz)

Information relevant for export to North America



Product Standards	UL 508C; CSA-C22.2 No. 14; IEC/EN61800-3; IEC/EN61800-5; CE marking
NA Certification	Request filed for UL and CSA
Suitable for	Branch circuits
Max. Voltage Rating	3~ 240 V AC IEC: TN-S UL/CSA: "Y" (Solidly Grounded Wey)
Degree of Protection	IEC: IP21; UL/CSA NEMA 1