

LUXOMAT® ALC-ELU/D




For 2G7 compact
fluorescent lamps



black with globe Oslo



white

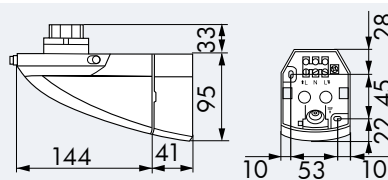

■ TECHNICAL DATA

- ~ 230 V ~ ±10%
- IP44 / Class II / CEE
- L 185 x W 107 x H 147 mm
- 25°C to +50°C
- made of high-quality and UV-resistant polycarbonate

Lamps

- 2G7 2G7 PL 5 - 9 W compact fluorescent lamp

Channel 1 (light control)

- 1000 W, cos φ = 1
- 2 - 2000 Lux

■ System shades (see page 22)



■ PRODUCT INFORMATION

- Automatic switching with built-in, continuously variable twilight switch
- System light lower sections LUXOMAT® ALC-ELU/D SLS with electronic ballast and 2G7 lamp fitting for 9 W energy-saving lamps
- Freely combinable with 17 different System-Globes SG – see below!
- Wall or outer corner installation
- Special base for outer corner installation available as an accessory
- Time-saving single-handed plug-in base installation
- Possible to connect additional lights switched in precisely the same way as the master light
- **Application examples:** entrances, garages, patios, balconies, at entrance gates

▶ Wiring diagrams on page 79, 80!

■ ACCESSORY (OPTIONAL)

ALC-ES corner base for outer corner installation



white



black

Energy and environment balance
sheet see page 15

Description	Colour	Part number
ALC-ELU/D SLS	white	91335
ALC-ELU/D SLS	black	91345
Accessory (optional)		
ALC-ES corner base	white	91305
ALC-ES corner base	black	91325