LUXOMAT® AL2-RC-plus 230

silver with globe Hamburg



white

black

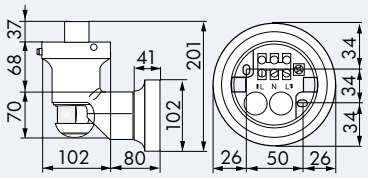

Installation types

Wall installation



Outside corner mounting



Inside corner mounting



TECHNICAL DATA

- 230 V~ ±10 %
- 230°
- max. 16 m by walking across (tangential)
- IP44 / Class II / CE
- L 182 x W 102 x H 175 mm
- -25°C to +50°C
- made of high-quality and UV-resistant polycarbonate
- IR-RC, IR-RC-Mini

Lamps

- E27 max. 100 W – conventional lamp or E27 energy-saving lamp

Channel 1 (light control)

- 1000 W, cosφ = 1
- 15 sec. - 16 min. or pulse function
- 2 - 2000 Lux

System shades (see page 22)

PRODUCT INFORMATION

- Remote controllable system light lower sections **LUXOMAT®** AL2-RC-plus SLS
- Freely combinable with 17 different System-Globes SG – see below!
- Tried-and-tested RC-plus motion-detector technology with 230° detection range
- 360° creep zone protection for full security, may be activated or deactivated using the **LUXOMAT®** IR-RC remote control.
- Wall, ceiling, inside and outside corner installation
- Time-saving single-handed plug-in base installation
- Continuous light ON and OFF possible at any time with the optional **LUXOMAT®** IR-RC-Mini remote control
- Connection of external lights possible
- **Application examples:** monitoring of an entire side of a house, entrance areas, garages, at entrance gates

Wiring diagrams on page 79, 80!
Remote controls on page 74, 75!

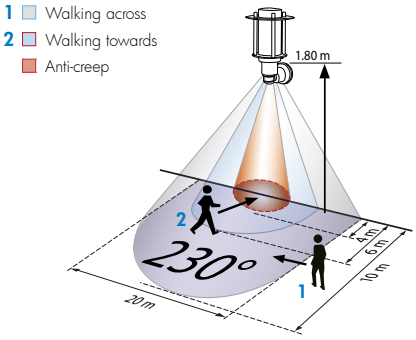

ACCESSORY (OPTIONAL)

IR-RC

(to order separately)

IR-RC-Mini

(to order separately)

AL2-RC-plus-ES corner base for outside and inside corner installation

white black silver

RC element

Energy and environment balance sheet see page 15

Description	Colour	Part number
AL2-RC-plus 230 SLS	white	92382
AL2-RC-plus 230 SLS	black	92392
AL2-RC-plus 230 SLS	silver	92047
Accessory (optional)		
LUXOMAT® IR-RC	grey	92000
LUXOMAT® IR-RC-Mini	grey	92090
AL2-RC-plus corner base	white	92373
AL2-RC-plus corner base	black	92414
AL2-RC-plus corner base	silver	92048
RC element	white	10880