

LUXOMAT® FL3-LED-130




Warm-tone LEDs



white



black

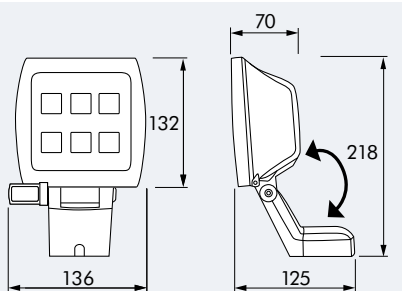

TECHNICAL DATA

- 230V~ ±10%
- 130°
- max. 10 m by walking across
- IP44 / Class I / CEE
- L 136 x W 125 x H 218 mm
- 25°C to +50°C
- Die-cast aluminium floodlight, motion detector made of high-quality, UV-resistant polycarbonate

Lamps included

- 6 x 1W diode
- Light colour** approx. 3000K
- Total power consumption** 9W



Channel 1 (light control)

- 1000 W, cosφ = 1
- 500 W, cosφ = 0.5
- 30 sec. - 30 min.
- 2 - 2000 Lux

PRODUCT INFORMATION

- **LUXOMAT® FL3-LED-130** floodlight with integrated motion detector and LED technology
- Suitable for outdoor installation
- 130° detection range
- Possible to connect additional lights that are switched in precisely the same way as the master light
- Twilight switch and activation time may be continuously varied
- Housing made from die-cast aluminium with corrosion-resistant stainless-steel screws
- Adjustable for up or downlighting
- **Application examples:** ideal for monitoring narrow lots or entrance fronts

Light distribution

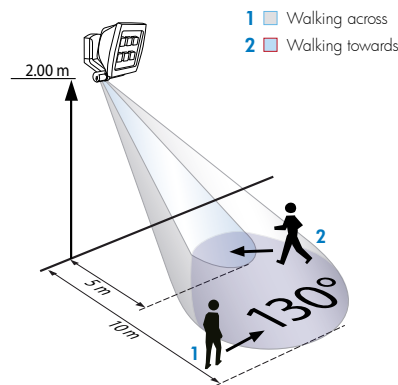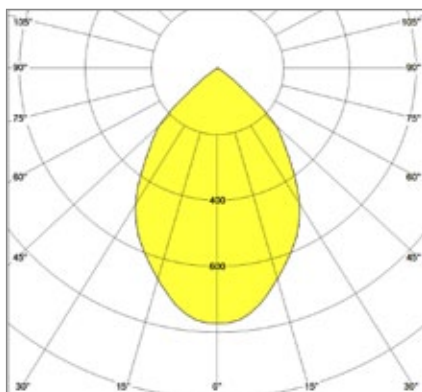

Energy and environment balance sheet see page 42

Description	Colour	Part number
FL3-LED-130	white	92532
FL3-LED-130	black	92531