

LUXOMAT® Ecolight 18-/26-W Automatic



18-W white




18-W black




26-W black



26-W white

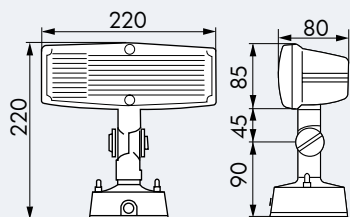

Ecolight 18-W

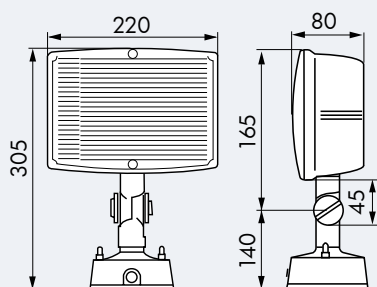

Ecolight 26-W

TECHNICAL DATA

- 230V~ ±10%
- IP44 / Class II / CE
- 18-W**
L 100 x W 220 x H 220 mm
- 26-W**
L 100 x W 220 x H 305 mm
- 25°C to +50°C
- made of high-quality and UV-resistant polycarbonate

Lamps

- 18-W** PL18W/G24q-2
Luminous flux 1.200 lm
- 26-W** PL26W/G24q-3
Luminous flux 1.800 lm


Channel 1 (light control)

- 2 - 2000 Lux

PRODUCT INFORMATION


- **LUXOMAT®** Ecolight 18-W and Ecolight 26-W energy-saving floodlight for wall and ceiling installation
- Twilight switch may be continuously varied
- Approx. 80% lower energy consumption when an 18W energy-saving lamp is used compared with a 100W conventional lamp
- Energy-saving lamps last longer: around 12,000 hours compared with conventional lamps (approx. 1,000 hours); therefore very low maintenance costs
- Very low intrinsic heating due to the electronic ballast's minimal dissipation loss
- Very high light yield thanks to special reflectors
- **Application examples:** façade lighting, company signs, general lighting

▶ Wiring diagrams on page 79!




Mounting socket

Light distribution Ecolight 18W

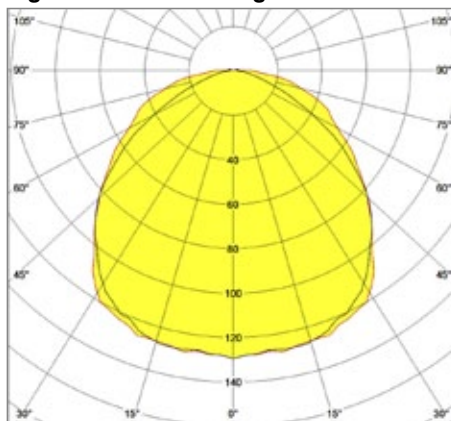

Light distribution Ecolight 26W

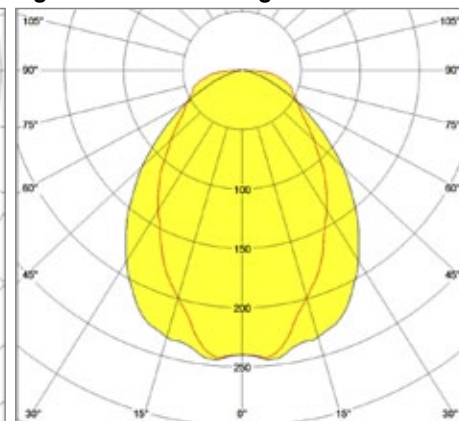

Energy and environment balance sheet see page 42

Description	Colour	Part number
Ecolight 18-W Automatic	black	21010
Ecolight 18-W Automatic	white	21015
Ecolight 26-W Automatic	black	22010
Ecolight 26-W Automatic	white	22015