


LUXOMAT® DALI/KNX Gateway 2 IP

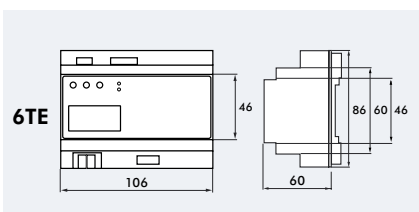

FUNCTIONAL OVERVIEW

Function	
Primary functions	✓
Visualisation	✓
Scenes	✓

TECHNICAL DATA



110 - 240 V, 50 to 60 Hz,
max. 0.1 A, KNX BUS



LED red when displaying
normal/addressing mode

PWR-LED green when
displaying operational readiness
(blinks when operating normally)

ERR-LED red when displaying
error conditions



Learn key for switching
normal/addressing mode
3 keys for device control and
parameterisation



IP20 / Class I



6 TE
L 106 x W 60 x H 86 mm

Operation
0°C to +45°C



Storage
-25°C to +70°C



Plastic LEXAN UL-94-V0

PRODUCT INFORMATION

- Up to 64 EBs in 16 groups can be switched and dimmed with each gateway
- Commissioning and assignment of the DALI EBs via installed control keys, PDA or with software tool
- Local identification of the lights with the help of the comfortable commissioning tool
- RJ45 interface for integration into the IP network
- Via ETS individual activation of the EBs
- Commissioning through a web browser
- Connection of the KNX-BUS with the DALI-BUS designed for lighting control
- Saving of lighting scenarios without KNX auxiliary components
- Easy group assignment directly at the display
- Simple reconfiguration also possible without ETS
- Commissioning following installation also possible without KNX
- Commissioning also possible via integrated web server with PDA
- Connection 110 - 230 VAC and KNX



Description	Colour	Part number
DALI/KNX Gateway 2 IP	white	90122
Accessory (optional)		
DALI-Programming Tool	white	90123