


LUXOMAT® KNXnet/IP Interface

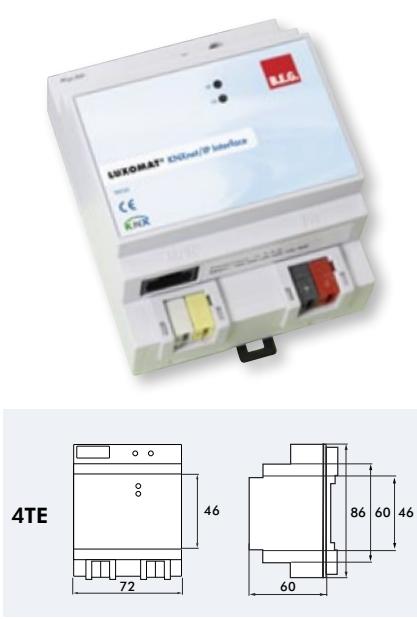

FUNCTIONAL OVERVIEW

Function

Primary functions	✓
Visualisation	
Database and alarm history	
Scenes	
Weekly time switching plan	
Annual time switching plan	
Logic	

TECHNICAL DATA



External and via KNX BUS, SELV
12-30 V AC/DC



LED red when displaying
normal/addressing mode



PWR-LED green when
displaying operational readiness
(blinks when operating normally)



ERR-LED red when displaying
error conditions



Learn key for switching
normal/addressing mode



IP20 / Class I



4 TE
L 72 x W 60 x H 86 mm

Operation

0°C to +45°C

Storage

-25°C to +70°C



Plastic LEXAN UL-94-V0

i PRODUCT INFORMATION

- Affordable programming of a KNX system via LAN.
- Programming interfaces from the ETS to the KNX BUS
- Scan function (ETS3 and 4)
- KNXnet/IP tunnel connection
- 4TE plastic top-hat rail housing
- Programmable via ETS3 and 4
- Connection: 12-30 V AC/DC, network and KNX



Description	Colour	Part number
KNXnet/IP Interface	white	90125