

SLAVE OCCUPANCY DETECTORS FOR HIGH ELEVATIONS (MOTION DETECTOR FOR INSIDE USE)


LUXOMAT® PD4-S-GH-SM



Suitably for high-bay storages



SM

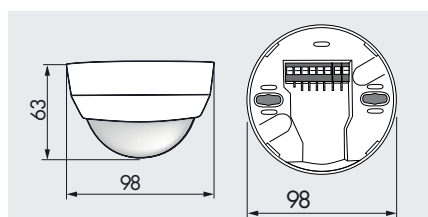


■ TECHNICAL DATA

- 230V~ ±10%
- 360°
- across Ø 44.00 m
- SM = IP20 / Class II / CEE
- SM Ø 98 x H 63 mm
- 25°C to +50°C
- Housing UV- and shock-resistant polycarbonate
- Slave output**
- 230V

▶ Wiring diagrams on page 147 - 154!


❗ PRODUCT INFORMATION

- Occupancy detector LUXOMAT® PD4-S-GH, Slave with oval and large detection area, for surface mounting
- Great energy-saving potential, particularly in large rooms and when monitoring large areas
- One Master occupancy detector is necessary for controlling light and heating
- Motion can be detected in all room segments using Slave
- When a movement is detected, the Slave transmits an impulse to the Master
- The movement is detected independently of light level
- There are no adjustment elements
- Sensor and power supply in a single housing
- **Typical applications:** monitoring of warehouses, high-bay storages, wherever at a great mounting height is necessary

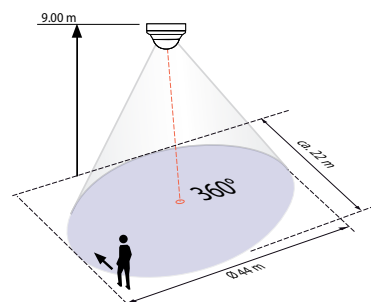

■ ACCESSORY (OPTIONAL)

Wire basket



Socket IP54



SM-Socket IP65



Blinds
see page 102!

Description	Colour	Part number
PD4-S-GH-SM	white	92265
Accessory (optional)		
Wire basket BSK	white	92199
Socket IP54	white	92161
SM-Socket IP65 for PD4-SM (IP20)	white	92375



CEILING-MOUNTED
OCCUPANCY
DETECTORS