




## ■ TECHNICAL DATA

<b>Supply voltage</b>	230V, 50 – 60Hz
<b>Power consumption</b> (real power)	0.4 W
<b>Switch</b> (potential-free)	Change-over, contact gap < 3 mm
<b>Contact material</b>	AgCdO
<b>Switching capacity</b>	16 A / 250 V~ at $\cos(\varphi) = 1$ 2.5 A with inductive load $\cos(\varphi) = 0.6$ max. filament lamp load 2000 W
<b>Minimum switching interval</b>	30 min.
<b>Time base</b>	Quartz
<b>Power back-up</b> (at 20°C)	≥ 100 h
<b>Accuracy</b> (at 20°C)	≤ ±1.5 sec. / day
<b>Permitted ambient temperature</b>	-5°C to +50°C
<b>Enclosure</b>	self-extinguishing thermoplastic
<b>Dimensions</b>	45 x 52.5 x 55 mm
<b>Distribution board mounting</b>	35 mm DIN-rail (DIN EN 50022)
<b>Surface mounting</b>	Wall mounting with terminal cover, may be lead-sealed
<b>Type of connection</b>	Screw terminals
<b>Type of protection</b>	IP20 to DIN EN 60529
<b>Class of protection</b>	II when installed according to regulations

## ..... | LUXOMAT® TS-AD3/4

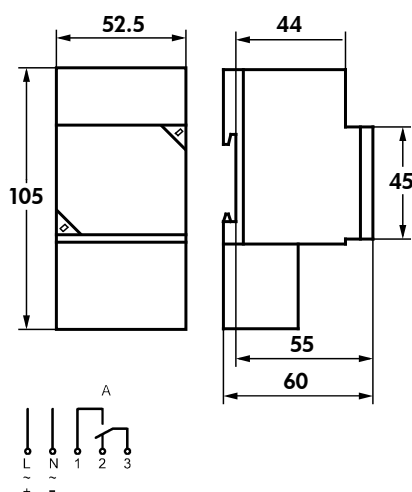

## i PRODUCT INFORMATION

- Daily program
- Slim format 52.5 mm
- Captive setting keys
- Manual override switch permanently ON / AUTO

## HIGHLIGHTS

- Easy programming with captive setting keys
- Easy to read switching program
- Analogue display (clock hands)

Description	Version	Part nr.
Analogue time switch TS-AD3	Day without reserve	92678
Analogue time switch TS-AD4	Day with reserve	92680