



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)



Features :

- High efficiency 91% and low power dissipation
- 150% peak load capability
- Built-in active PFC function, PF>0.93
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Cooling by free air convection
- Can be installed on DIN rail TS-35/7.5 or 15
- UL 508 (industrial control equipment) approved
- EN61000-6-2(EN50082-2) industrial immunity level
- Built-in DC OK relay contact
- 100% full load burn-in test
- 3 years warranty




SPECIFICATION


MODEL		SDR-120-12		SDR-120-24		SDR-120-48	
OUTPUT	DC VOLTAGE	12V		24V		48V	
	RATED CURRENT	10A		5A		2.5A	
	CURRENT RANGE	0 ~ 10A		0 ~ 5A		0 ~ 2.5A	
	RATED POWER	120W		120W		120W	
	PEAK CURRENT	15A		7.5A		3.75A	
	PEAK POWER <small>Note.6</small>	180W (3 sec.)					
	RIPPLE & NOISE (max.) <small>Note.2</small>	100mVp-p		100mVp-p		120mVp-p	
	VOLTAGE ADJ. RANGE	12 ~ 14V		24 ~ 28V		48 ~ 55V	
	VOLTAGE TOLERANCE <small>Note.3</small>	± 1.0%		± 1.0%		± 1.0%	
	LINE REGULATION	± 0.5%		± 0.5%		± 0.5%	
	LOAD REGULATION	± 1.0%		± 1.0%		± 1.0%	
	SETUP, RISE TIME	1500ms, 60ms/230VAC		3000ms, 60ms/115VAC at full load			
HOLD UP TIME (Typ.)	20ms/230VAC		20ms/115VAC at full load				
INPUT	VOLTAGE RANGE <small>Note.7</small>	88 ~ 264VAC		124 ~ 370VDC			
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	0.93/230VAC		0.96/115VAC at full load			
	EFFICIENCY (Typ.)	89%		91%		90.5%	
	AC CURRENT (Typ.)	1.4A/115VAC		0.7A/230VAC			
	INRUSH CURRENT (Typ.)	35A/115VAC		70A/230VAC			
	LEAKAGE CURRENT	<1mA / 240VAC					
PROTECTION	OVERLOAD	Normally works within 110 ~ 150% rated output power for more than 3 seconds and then shut down o/p voltage >150% rated power, constant current limiting with auto-recovery within 3 seconds and shut down o/p voltage after 3 seconds					
	OVER VOLTAGE	14 ~ 17V		29 ~ 33V		56 ~ 65V	
		Protection type : Shut down o/p voltage, re-power on to recover					
	OVER TEMPERATURE	95°C ± 5°C (TSW) detect on heatsink of power switch					
		Protection type : Shut down o/p voltage, recovers automatically after temperature goes down					
FUNCTION	DC OK REALY CONTACT RATINGS (max.)	60Vdc/0.3A, 30Vdc/1A, 30Vac/0.5A resistive load					
ENVIRONMENT	WORKING TEMP.	-25 ~ +70°C (Refer to "Derating Curve")					
	WORKING HUMIDITY	20 ~ 95% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH					
	TEMP. COEFFICIENT	± 0.03%/°C (0 ~ 50°C)					
	VIBRATION	Component: 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6					
SAFETY & EMC <small>(Note 4)</small>	SAFETY STANDARDS	UI508, TUV EN60950-1 approved;(meet EN60204-1)					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC O/P-DC OK:0.5KVAC					
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:>100M Ohms / 500VDC / 25°C / 70% RH					
	EMC EMISSION	Compliance to EN55011, EN55022 (CISPR22), EN61204-3 Class B, EN61000-3-2,-3					
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-2 (EN50082-2), EN61204-3, heavy industry level, criteria A, SEMI F47, GL approved					
OTHERS	MTBF	289.9K hrs min. MIL-HDBK-217F (25°C)					
	DIMENSION	40*125.2*113.5mm (W*H*D)					
	PACKING	0.67Kg; 20pcs/14.4Kg/1.16CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 5. Installation clearances : 40mm on top, 20mm on the bottom, 5mm on the left and right side are recommended when loaded permanently with full power. In case the adjacent device is a heat source, 15mm clearance is recommended. 6. 3 seconds max., please refer to peak loading curves. 7. Derating may be needed under low input voltage. Please check the derating curve for more details.						

Case No.992A Unit:mm

Mechanical Specification

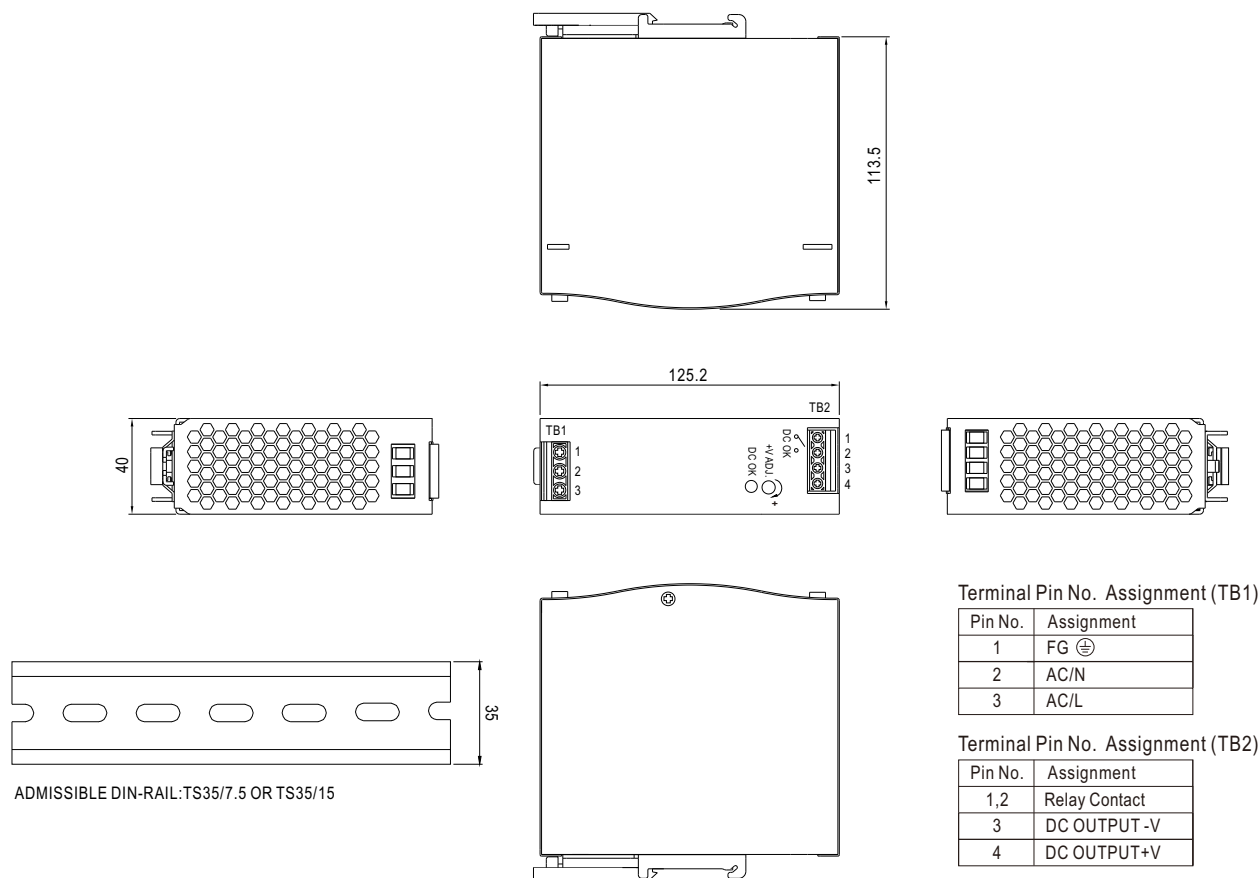



Block Diagram

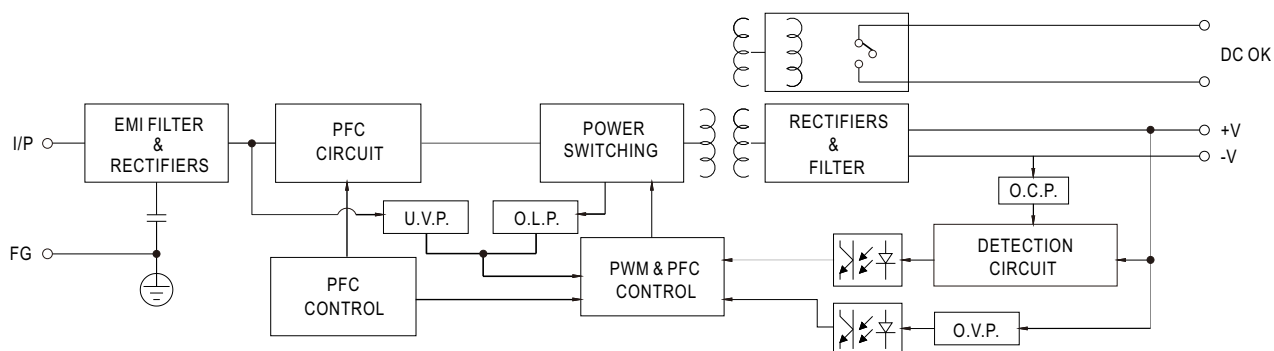


DC OK Relay Contact

Contact Close	PSU turns on / DC OK.
Contact Open	PSU turns off / DC Fail.
Contact Ratings (max.)	30V/1A resistive load.


■ Peak Loading

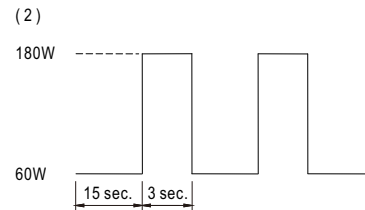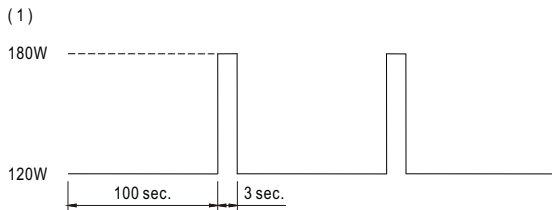

■ Derating Curve

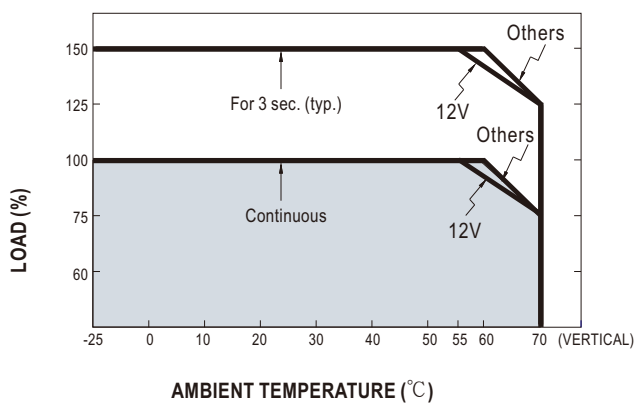

■ Output derating VS input voltage

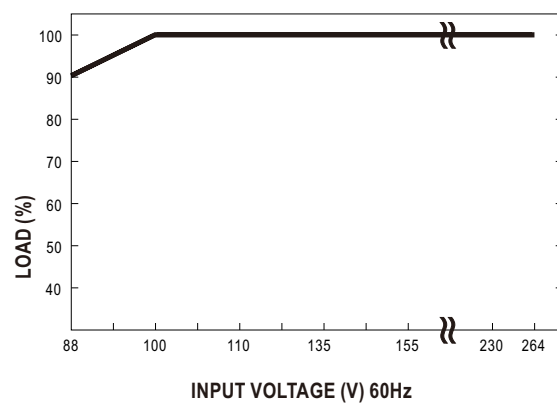



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Input: 88-264 AC / 124-370 DC, Output: 1, V1: 12, A1: 10	SDR12012	SDR-120-12	Buy on EAN
Input: 88-264 AC / 124-370 DC, Output: 1, V1: 24, A1: 5	SDR12024	SDR-120-24	Buy on EAN
Input: 88-264 AC / 127-370 DC, Output: 1, V1: 48, A1: 2,5	SDR12048	SDR-120-48	Buy on EAN