



**Automatización Eléctrica**

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)




- Features :
  - 2:1 wide input range
  - 4:1 wide input range(option)
  - 1000VDC I/O isolation
  - 3000VDC I/O isolation(option)
  - Built-in EMI filter
  - Protections: Short circuit / Overload
  - Cooling by free air convection
  - Six-sided shield metal case
  - 100% burn-in test
  - Low cost / High reliability
  - Approvals: FCC / CE
  - 2 years warranty



## SPECIFICATION

ORDER NO.	SKE10A-05	SKE10B-05	SKE10C-05	SKE10A-12	SKE10B-12	SKE10C-12	SKE10A-15	SKE10B-15	SKE10C-15	SKE10A-24	SKE10B-24	SKE10C-24	
OUTPUT	DC VOLTAGE			12V			15V			24V			
	CURRENT RANGE			84 ~ 840mA			66.6 ~ 666mA			42 ~ 420mA			
	RATED POWER												10W
	RIPPLE & NOISE (max.) Note.2			60mVp-p			60mVp-p			80mVp-p			
	LINE REGULATION Note.3												±0.3%
	LOAD REGULATION Note.4												±0.5%
	VOLTAGE ACCURACY												±2.0%
	SWITCHING FREQUENCY												200KHz min.
INPUT	VOLTAGE RANGE												A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC
	EFFICIENCY (Typ.)												78% 79% 80% 79% 81% 81% 80% 82% 82% 81% 82% 83%
	DC CURRENT												Full load A: 1100mA B: 530mA C: 270mA No load A: 28mA B: 16mA C: 8mA
	FILTER												Pi network
	PROTECTION												Fuse recommended
PROTECTION (Note. 5)	OVER CURRENT												160% ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed
	SHORT CIRCUIT												All output equipped with short circuit Protection type : Hiccup mode, recovers automatically after fault condition is removed
ENVIRONMENT	WORKING TEMP.												-25 ~ +71°C (Refer to output load derating curve)
	WORKING HUMIDITY												20% ~ 90% RH non-condensing
	STORAGE TEMP., HUMIDITY												-25 ~ +105°C, 10 ~ 95% RH
	TEMP. COEFFICIENT												±0.03% / °C (0 ~ 50°C)
	VIBRATION												10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes
SAFETY & EMC	WITHSTAND VOLTAGE												I/P-O/P:1KVDC
	ISOLATION RESISTANCE												I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH
	EMC EMISSION												Compliance to EN55022 Class B, FCC part 15 Class B
	EMC IMMUNITY												Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A
OTHERS	MTBF												500Khrs min. MIL-HDBK-217F(25°C)
	DIMENSION												50.8*25.4*11.2mm or 2**1**0.44" inch (L*W*H)
	WEIGHT												32g


### Mechanical Specification

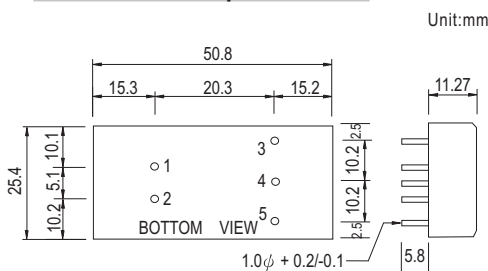

### Pin Configuration

Pin no.	Output Single
1	+Vin
2	-Vin
3	+Vout
4	No Pin
5	-Vout

### Derating Curve

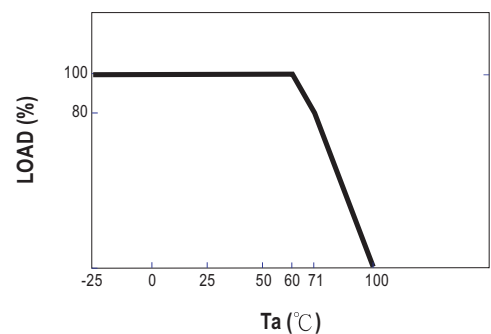

### NOTE

- All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
- Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- Line regulation is measured from low line to high line at rated load.
- Load regulation is measured from 10% to 100% rated load.
- Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

<b>Product</b>	<b>Code</b>	<b>Reference</b>	<b>Product link</b>
Input: 9-18 DC, Output: 1, V1: 12, A1: 0,84	SKE10A12	SKE10A-12	<a href="#">Buy on EAN</a>
Input: 9-18 DC, Output: 1, V1: 15, A1: 0,666	SKE10A15	SKE10A-15	<a href="#">Buy on EAN</a>
Input: 18-36 DC, Output: 1, V1: 5, A1: 2	SKE10B05	SKE10B-05	<a href="#">Buy on EAN</a>
Input: 18-36 DC, Output: 1, V1: 12, A1: 0,84	SKE10B12	SKE10B-12	<a href="#">Buy on EAN</a>
Input: 18-36 DC, Output: 1, V1: 15, A1: 0,666	SKE10B15	SKE10B-15	<a href="#">Buy on EAN</a>
Input: 18-36 DC, Output: 1, V1: 24, A1: 0,42	SKE10B24	SKE10B-24	<a href="#">Buy on EAN</a>
Input: 36-72 DC, Output: 1, V1: 5, A1: 2	SKE10C05	SKE10C-05	<a href="#">Buy on EAN</a>
Input: 36-72 DC, Output: 1, V1: 12, A1: 0,84	SKE10C12	SKE10C-12	<a href="#">Buy on EAN</a>
Input: 36-72 DC, Output: 1, V1: 15, A1: 0,666	SKE10C15	SKE10C-15	<a href="#">Buy on EAN</a>
Input: 36-72 DC, Output: 1, V1: 24, A1: 0,42	SKE10C24	SKE10C-24	<a href="#">Buy on EAN</a>