



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)




- Features :
 - 2:1 wide input range
 - 4:1 wide input range(option)
 - 1000VDC I/O isolation
 - 3000VDC I/O isolation(option)
 - Built-in EMI filter
 - Protections: Short circuit / Overload
 - Cooling by free air convection
 - Six-sided shield metal case
 - 100% burn-in test
 - Low cost / High reliability
 - Approvals: FCC / CE
 - 2 years warranty



SPECIFICATION

ORDER NO.	SKE15A-05	SKE15B-05	SKE15C-05	SKE15A-12	SKE15B-12	SKE15C-12	SKE15A-15	SKE15B-15	SKE15C-15	SKE15A-24	SKE15B-24	SKE15C-24		
OUTPUT	DC VOLTAGE	5V			12V			15V			24V			
	CURRENT RANGE	300 ~ 3000mA			125 ~ 1250mA			100 ~ 1000mA			62.5 ~ 625mA			
	RATED POWER	15W												
	RIPPLE & NOISE (max.) Note.2	50mVp-p			60mVp-p			60mVp-p			80mVp-p			
	LINE REGULATION Note.3	±0.3%												
	LOAD REGULATION Note.4	±0.5%												
	VOLTAGE ACCURACY	±2.0%												
	SWITCHING FREQUENCY	150KHz min.												
INPUT	VOLTAGE RANGE	A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC												
	EFFICIENCY (Typ.)	79%	79%	80%	80%	82%	82%	80%	83%	83%	82%	83%	84%	
	DC CURRENT	Full load	A: 1700mA B: 800mA C: 400mA											
	No load	A: 40mA B: 20mA C: 10mA												
	FILTER	Pi network												
PROTECTION	Fuse recommended													
PROTECTION (Note. 5)	OVER CURRENT	160% ~ 250% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	All output equipped with short circuit Protection type : Hiccup mode, recovers automatically after fault condition is removed												
ENVIRONMENT	WORKING TEMP.	-25 ~ +71°C (Refer to output load derating curve)												
	WORKING HUMIDITY	20% ~ 90% RH non-condensing												
	STORAGE TEMP., HUMIDITY	-25 ~ +105°C, 10 ~ 95% RH												
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)												
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes												
SAFETY & EMC	WITHSTAND VOLTAGE	I/P-O/P:1KVDC												
	ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH												
	EMC EMISSION	Compliance to EN55022 Class B, FCC part 15 Class B												
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8, light industry level, criteria A												
OTHERS	MTBF	300Khrs min. MIL-HDBK-217F(25°C)												
	DIMENSION	50.8*50.8*11.0 mm or 2**2**0.43" inch (L*W*H)												
	WEIGHT	65g												


Mechanical Specification

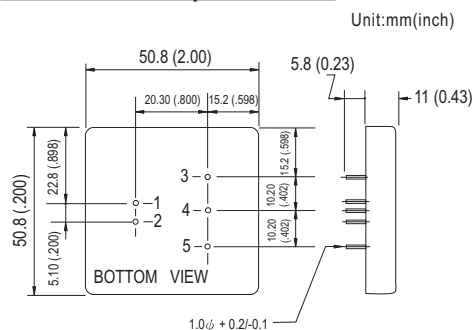

Pin Configuration

Pin No.	Output
1	+Vin
2	-Vin
3	+Vout
4	No Pin
5	-Vout

Derating Curve

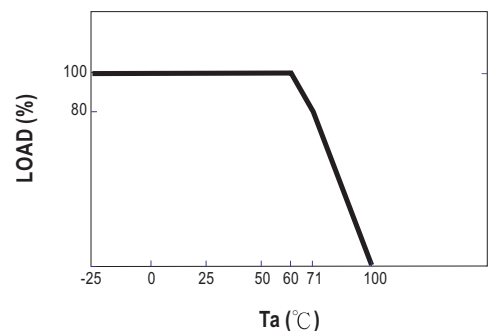

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
- 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- 3.Line regulation is measured from low line to high line at rated load.
- 4.Load regulation is measured from 10% to 100% rated load.
- 5.Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Input: 9-18 DC, Output: 1, V1: 12, A1: 1,25	SKE15A12	SKE15A-12	Buy on EAN
Input: 9-18 DC, Output: 1, V1: 15, A1: 1	SKE15A15	SKE15A-15	Buy on EAN
Input: 18-36 DC, Output: 1, V1: 5, A1: 3	SKE15B05	SKE15B-05	Buy on EAN
Input: 18-36 DC, Output: 1, V1: 12, A1: 1,25	SKE15B12	SKE15B-12	Buy on EAN
Input: 18-36 DC, Output: 1, V1: 15, A1: 1	SKE15B15	SKE15B-15	Buy on EAN
Input: 18-36 DC, Output: 1, V1: 24, A1: 0,625	SKE15B24	SKE15B-24	Buy on EAN
Input: 36-72 DC, Output: 1, V1: 5, A1: 3	SKE15C05	SKE15C-05	Buy on EAN
Input: 36-72 DC, Output: 1, V1: 12, A1: 1,25	SKE15C12	SKE15C-12	Buy on EAN
Input: 36-72 DC, Output: 1, V1: 15, A1: 1	SKE15C15	SKE15C-15	Buy on EAN
Input: 36-72 DC, Output: 1, V1: 24, A1: 0,625	SKE15C24	SKE15C-24	Buy on EAN