




Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)




- Features :
- 2:1 wide input range
- 1500VDC I/O isolation
- Built-in remote ON/OFF control
- Built-in EMI filter
- Protections: Short circuit / Overload
- Cooling by free air convection
- Single in line package
- 100% full load burn-in test
- Low cost / High reliability
- Modified models available: output 3.3V/9V
- 2 years warranty



SPECIFICATION

ORDER NO.	SPB05A-05	SPB05B-05	SPB05C-05	SPB05A-12	SPB05B-12	SPB05C-12	SPB05A-15	SPB05B-15	SPB05C-15			
OUTPUT	DC VOLTAGE			5V			12V			15V		
	CURRENT RANGE			100 ~ 1000mA			42 ~ 417mA			33 ~ 333mA		
	RATED POWER			5W								
	RIPPLE & NOISE (max.) Note.2			80mVp-p			90mVp-p			90mVp-p		
	LINE REGULATION Note.3			±0.5%								
	LOAD REGULATION Note.4			±0.5%								
	VOLTAGE ACCURACY			±2.0%								
	SWITCHING FREQUENCY			100KHz min.								
EXTERNAL CAPACITANCE LOAD (max.)			220uF									
INPUT	VOLTAGE RANGE			A: 9 ~ 18VDC B: 18 ~ 36VDC C: 36 ~ 72VDC								
	EFFICIENCY (Typ.)			81%	83%	83%	85%	85%	85%	84%	85%	85%
	DC CURRENT			Full load A: 515mA B: 250mA C: 125mA								
				No load A: 40mA B: 25mA C: 15mA								
	FILTER			Capacitor Type								
	REMOTE CONTROL			Power ON : R.C. ~ -Vin < 1VDC or open ; Power OFF : R.C. ~ -Vin > 4VDC or short								
PROTECTION (Note. 5)	OVERLOAD			150 ~ 250% rated output power								
				Protection type : Recovers automatically after fault condition is removed								
	SHORT CIRCUIT			All output equipped with short circuit								
			Protection type : Recovers automatically after fault condition is removed									
ENVIRONMENT	WORKING TEMP.			-40 ~ +80°C (Refer to "Derating Curve")								
	WORKING HUMIDITY			20% ~ 90% RH non-condensing								
	STORAGE TEMP., HUMIDITY			-55 ~ +105°C, 10 ~ 95% RH								
	TEMP. COEFFICIENT			±0.05% / °C (0 ~ 55°C)								
	VIBRATION			10 ~ 500Hz, 2G 10min./1 cycle, period for 60min. each along X, Y, Z axes								
SAFETY	WITHSTAND VOLTAGE			I/P-O/P: 1.5KVDC								
	ISOLATION RESISTANCE			I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH								
	ISOLATION CAPACITANCE			80pF max.								
	EMC EMISSION			Compliance to EN55022 Class B, FCC part 15 Class B								
EMC IMMUNITY			Compliance to EN61000-4-2,3,4,5,6,8 light industry level, criteria A									
OTHERS	MTBF			600Khrs min. MIL-HDBK-217F(25°C)								
	DIMENSION			21.8*9.2*11.1mm or 0.86**0.36**0.44" inch (L*W*H)								
	WEIGHT			4.8g								


■ Mechanical Specification

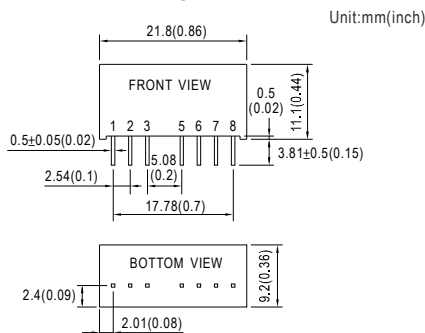

■ Pin Configuration

Pin No.	Output
1	-Vin
2	+Vin
3	R.C.
5	N.C.
6	+Vout
7	-Vout
8	N.C.

■ Derating Curve

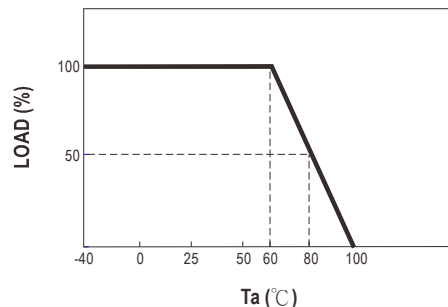

NOTE

1. All parameters are specified at normal input, rated load, 25°C 70% RH ambient.
2. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uF & 47uF capacitor.
3. Line regulation is measured from low line to high line at rated load.
4. Load regulation is measured from 10% to 100% rated load.
5. Please prevent the converter from operating in overload or short circuit condition for more than 30 seconds.



Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
	SPB05A05	SPB05A-05	Buy on EAN
	SPB05B15	SPB05B-15	Buy on EAN
	SPB05B12	SPB05B-12	Buy on EAN
	SPB05B05	SPB05B-05	Buy on EAN
	SPB05A15	SPB05A-15	Buy on EAN
	SPB05A12	SPB05A-12	Buy on EAN
	SPB05C05	SPB05C-05	Buy on EAN
	SPB05C12	SPB05C-12	Buy on EAN
	SPB05C15	SPB05C-15	Buy on EAN