




Electric Automation
Automation specialists

Reference: HV 60 MW

Code: 2003619

Device/connection plug cavity wall 2K,
Ø68mm, H61mm, Orange,
Polypropylene, PP

Buy it at [Electric Automation Network](#)

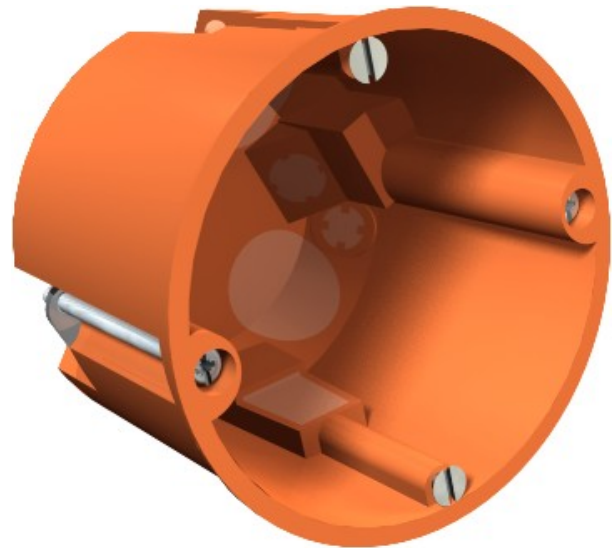

Cavity wall accessory/connection socket, wind-tight version through soft entry membrane. Dimensions to DIN 49073-1, for plate thickness 7-35 mm Standard combination spacing 71 mm, option for continuous wiring using connection support for combinations between accessory sockets and accessory connection sockets, 8 wind-proof insertion membrane for NYM cables, data cables and pipes Ø 20 mm, accessory sockets can also be used as connection sockets to VDE 0806-1 with double bolt fastening and screw-on cover, protection rating IP40.