




Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)




Nail anchor

Type	Thread	Dimension d	Dimension l	Bore hole depth	Dimension L	Pack.	Weight	Item No.
		mm	mm	mm	mm	pcs	kg/100 pcs.	
FNA II 6X30 M6/5	M6	6	13	40	53	100	1.400	3498 42 5

St Steel **G** Electrogalvanised /100 pc.

Nail anchor with M6 thread. European technical approval for concrete. Fire resistance class to F120 according to fire protection testing report.




Nail anchor

Type	Dimension D	Dimension d	Dimension L	Bore hole depth	Pack.	Weight	Item No.
	mm	mm	mm	mm	pcs	kg/100 pcs.	
FNA II 6X30/5	15	6	40	40	100	1.120	3498 46 8

St Steel **G** Electrogalvanised /100 pc.

Nail anchor with drive-in head. European technical approval for concrete. Fire resistance class to F 120 according to fire protection testing report.

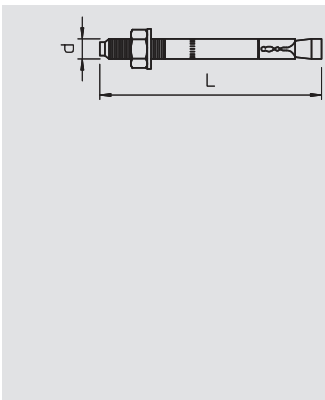


Anchor bolt

Type	Thread	Clamping range	Dimension L	Dimension d	Perm. load range, tension zone	Pack.	Weight	Item No.
		mm	mm	mm	kN	pcs	kg/100 pcs.	
FAZ II 8 10 GS	M8	10	75	8	2.4	50	3.720	3498 50 6
FAZ II 8 30 GS	M8	30	97	8	2.4	50	3.800	3498 48 4
FAZ II 10 10 GS	M10	10	95	10	4.3	50	7.680	3498 54 9
FAZ II 10 30	M10	30	115	10	4.3	25	7.520	3498 58 1
FAZ II 10 100	M10	100	185	10	4.3	20	11.500	3498 59 7
FAZ II 12 10	M12	10	110	12	7.6	20	10.400	3498 65 4

St Steel **G** Electrogalvanised /100 pc.

Anchor bolt for fastening high loads. Matches OBO mounting systems and wall support brackets and supports.

With European technical approval no.: ETA-05/0069
GS = with large washer, external diameter approx. 2.5 x drill diameter.

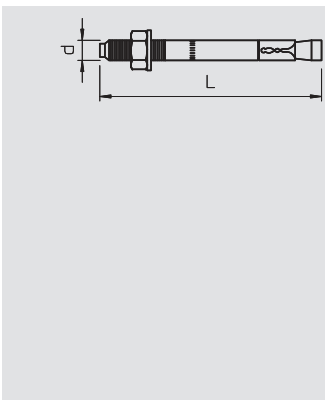


Anchor bolt VA

Type	Thread	Dimension L	Dimension d	Clamping range	Perm. load range, tension zone	Pack.	Weight	Item No.
		mm	mm	mm	kN	pcs	kg/100 pcs.	
FAZ II 810VA4401	M8	75	8	10	2.4	50	3.720	3498 50 9
FAZ II 830VA4401	M8	95	8	30	2.4	50	3.800	3498 48 7
FAZ II 10/50 V4A	M10	135	10	50	4.3	20	8.280	3498 83 5
FAZ II 10/10GS V	M 10	95	10	10	4.3	50	7.680	3498 82 4
FAZ II 12/10 VA	M12	110	12	10	4.76	20	10.400	3498 85 9
FAZ II 10 30 V4A	M10	115	10	30	4.3	50	7.000	3498 58 4

V4A Stainless steel, grade 316 Stained /100 pc.

Anchor bolt for fastening high loads. Matches OBO mounting systems and wall support brackets and supports.

With European technical approval no.: ETA-05/0069
GS = with large washer, external diameter approx. 2.5 x drill diameter.





Heavy-duty anchor

Type	Thread	Dimension L	Dimension d	Clamping range	Perm. load range, tension zone	Pack.	Weight	Item No.
		mm	mm	mm	kN	pcs	kg/100 pcs.	
FH II 18X80	M12	120	18	10	9.91	10	20.000	3498 74 3

St Steel **G** Electrogalvanised /100 pc.

Heavy-duty anchor for fastening components with large loads.




Hammerset anchor

Type	Thread	Dimension D	Dimension L	Screw-in depth	Perm. load range, tension zone	Pack.	Weight	Item No.
		mm	mm	min.-max. mm	kN	pcs	kg/100 pcs.	
FZEA II 10X40 G	M8	10	40	11-17	1.6	100	1.550	3492 03 6
FZEA II 12X40 G	M10	12	40	13-19	3	100	2.075	3492 06 0
FZEA II 14X40 G	M12	14	40	15-21	3.6	50	2.750	3492 09 5

St Steel **G** Electrogalvanised /100 pc.

Undercut steel anchor with internal thread.
With European technical approval: no.: ETA-06/0271





Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Knock-in anchor for threaded rod M8, 10x40, Electrogalvanised, DIN 50961, Steel, St	3492036	FZEA II 10X40 G	Buy on EAN
Knock-in anchor for threaded rod M10, 12x40, Electrogalvanised, DIN 50961, Steel, St	3492060	FZEA II 12X40 G	Buy on EAN
Knock-in anchor for threaded rod M12, 14x40, Electrogalvanised, DIN 50961, Steel, St	3492095	FZEA II 14X40 G	Buy on EAN
Fire protection anchor thread M6, 6x30mm, Electrogalvanised, DIN 50961, Steel, St	3498425	FNA II 6X30 M6/5	Buy on EAN
Fire protection anchor nail tie, 6x30mm, Electrogalvanised, DIN 50961, Steel, St	3498468	FNA II 6X30/5	Buy on EAN
Bolt anchor with large washer, M8x97mm, Electrogalvanised, DIN 50961, Steel, St	3498484	FAZ II 8 30 GS	Buy on EAN
Bolt anchor with large washer, M8x97mm, Stained, Stainless steel, grade 316, VA, 1.4401	3498487	FAZ II 830VA4401	Buy on EAN
Bolt anchor with large washer, M8x77mm, Electrogalvanised, DIN 50961, Steel, St	3498506	FAZ II 8 10 GS	Buy on EAN
Bolt anchor with large washer, M8x77mm, Stained, Stainless steel, grade 316, VA, 1.4401	3498509	FAZ II 810VA4401	Buy on EAN
Bolt anchor with large washer, M10x95mm, Electrogalvanised, DIN 50961, Steel, St	3498549	FAZ II 10 10 GS	Buy on EAN
Bolt anchor , M10x115mm, Electrogalvanised, DIN 50961, Steel, St	3498581	FAZ II 10 30	Buy on EAN
Bolt anchor , M12x110mm, Electrogalvanised, DIN 50961, Steel, St	3498654	FAZ II 12 10	Buy on EAN
Bolt anchor with large washer, M10x95mm, Stainless steel, grade 316, VA, 1.4401	3498824	FAZ II 10/10GS V	Buy on EAN
Bolt anchor , M10x135, Stainless steel, grade 316, VA, 1.4401	3498835	FAZ II 10/50 V4A	Buy on EAN

Bolt anchor , M12, Stainless steel, grade 316, VA, 1.4401

3498859

FAZ II 12/10
VA

Buy on EAN