At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. HERE



Barrier strip connector

Type		Pack. pcs	Weight kg/100 pcs.	Item No.
TSGV VA4310		10	1.000	**6067 97 0**

V2A Stainless steel, grade 301 /pc.

Barrier strip connector for screwless connection of the TSG barrier strip in all side heights.



Cable protection ring

Type	Colour	for perforation mm		Pack. pcs	Weight kg/100 pcs.	Item No.
KSR-910 PE	Light grey	20 x 58		25	0.500	**6066 71 2**

PE Polyethylene /pc.

Cable protection ring for bottom perforation in cable trays of type IKS and for side perforation in AZ channels and luminaire support channel.



Cable protection ring

Type	Colour	For side perforation mm		Pack. pcs	Weight kg/100 pcs.	Item No.
KSR-DR 920 PE	Light grey	32 x 90		25	0.640	**6087 96 5**

PE Polyethylene /pc.

Cable protection ring for side perforation in the side rails of the IKS cable tray.

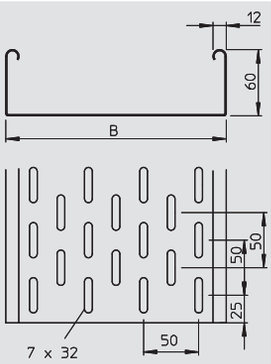

Cable tray SKS

Type	Width mm	Plate thickness mm	Length mm	Useful cross-section cm²	Appr. load: 1.5 m kN/m	2.0 m kN/m	2.5 m kN/m	3.0 m kN/m	Weight kg/100 m	Item No.
SKS 610 FS	100	1.5	3,000	58	2.65	1.8	1.15	0.5	239.400	**6056 10 5**
SKS 615 FS	150	1.5	3,000	88	2.65	1.8	1.15	0.5	310.000	**6056 15 6**
SKS 620 FS	200	1.5	3,000	118	2.65	1.8	1.15	0.5	346.670	**6056 20 2**
SKS 630 FS	300	1.5	3,000	178	2.65	1.8	1.15	0.5	455.300	**6056 29 6**
SKS 640 FS	400	1.5	3,000	238	2.65	1.8	1.15	0.5	522.000	**6056 40 7**
SKS 650 FS	500	1.5	3,000	298	2.65	1.8	1.15	0.5	650.300	**6056 50 4**
SKS 660 FS	600	1.5	3,000	358	2.65	1.8	1.15	0.5	749.300	**6056 60 1**
SKS 610 FT	100	1.5	3,000	58	2.65	1.8	1.15	0.5	274.300	**6056 63 6**
SKS 615 FT	150	1.5	3,000	88	2.65	1.8	1.15	0.5	328.700	**6056 64 4**
SKS 620 FT	200	1.5	3,000	118	2.65	1.8	1.15	0.5	407.400	**6056 65 2**
SKS 630 FT	300	1.5	3,000	178	2.65	1.8	1.15	0.5	460.000	**6056 67 9**
SKS 640 FT	400	1.5	3,000	238	2.65	1.8	1.15	0.5	566.700	**6056 69 5**
SKS 650 FT	500	1.5	3,000	298	2.65	1.8	1.15	0.5	689.000	**6056 71 7**
SKS 660 FT	600	1.5	3,000	358	2.65	1.8	1.15	0.5	794.300	**6056 73 3**

St Steel FS Strip-galvanised FT Hot-dip galvanised /m

SKS 60 = heavy-duty cable tray system with 60 mm side height. FS version includes RV 60 straight connector set.

Magnetic shield insulation without cover 20 dB, with cover 50 dB.

The cable tray, type SKS, should also be used for function maintenance. For additional data, please refer to BSS fire protection systems.



Load diagram, cable tray, type SKS 60

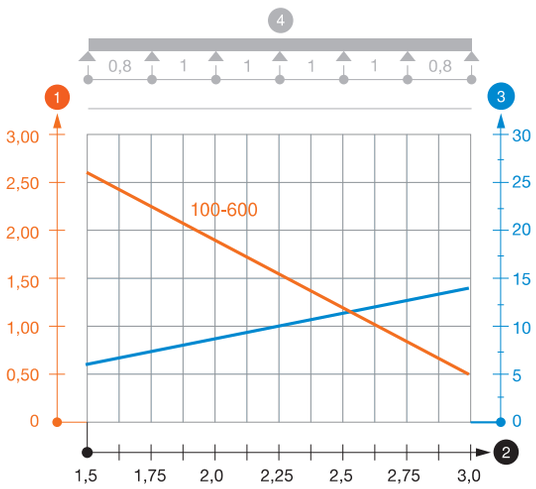

1 Permitted cable tray/ladder load in kN/m without man load
2 Support width in m
3 Rail bend in mm at permitted kN/m
4 Load scheme during testing
— Load curve with cable tray/ladder width in mm
— Strut bend curve according to support width

04_KTS_Masterkatalog_Länder_2012 / en / 23/05/2013 (LLExport_01554) / 24/06/2013

Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, click on the green button.

Product	Code	Reference	Product link
Barrier strip connector for all barrier strip side heigh, Stainless steel, grade 301, VA, 1.4310	6067970	TSGV VA4310	Buy on EAN
Cable protection ring for IKS side perforation, Light grey, Polyethylene, PE	6087965	KSR-DR 920 PE	Buy on EAN