



Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Special beam clamp systems

Beam clamp, V2A




Type	Dimension H	Dimension B	Dimension L	For threaded rod	Flange thickness	Pack.	Weight	Item No.
	mm	mm	mm		mm	pcs	kg/100 pcs.	
SPP 20-40 VA	63	44	45	M8	20-40	50	21.200	1486 27 4

V2A Stainless steel, grade 304

/100 pc.

This type of beam clamp is pushed onto the support and fixed to the girder or flat iron using a pressure trough and bolt (M8). The hexagonal bolt has a WAF of 10 mm and is tightened using the appropriate tool. If necessary, the double nipple, type 3100 M8, or an M8 threaded rod can be used on the clip element.



Beam clamp, V4A




Type	Dimension H	Dimension B	Dimension L	For threaded rod	Flange thickness	Pack.	Weight	Item No.
	mm	mm	mm		mm	pcs	kg/100 pcs.	
SPP 20-40 V4A	63	44	45	M8	20-40	50	21.200	1486 27 8

V4A Stainless steel, grade 316 L

/100 pc.

This type of beam clamp is pushed onto the support and fixed to the girder or flat iron using a pressure trough and bolt (M8). The hexagonal bolt has a WAF of 10 mm and is tightened using the appropriate tool. If necessary, the double nipple, type 3100 M8, or an M8 threaded rod can be used on the clip element.



Beam clamp, profile 1268




Type	Flange thickness	Dimension L	Dimension B	Dimension H	Pack.	Weight	Item No.
	mm	mm	mm	mm	pcs	kg/100 pcs.	
328 1	5-11	57	39.5	54.3	50	10.800	1408 01 1
328 2	10-19	67	39.5	54.3	50	12.500	1408 04 6

St Steel

ZD Galvanised, Deltatone 500

/100 pc.

Screwless rustproof coated beam clamp, with blocking spring, suitable for profile rail, type 1268 SL and 1268 S/SL. For rapid fastening on steel profiles during the mounting of cable tracks, clamp clips, luminaire suspensions, etc. A complete system consists of two beam clamps and a piece of C profile rail of any length, as well as two protective caps.

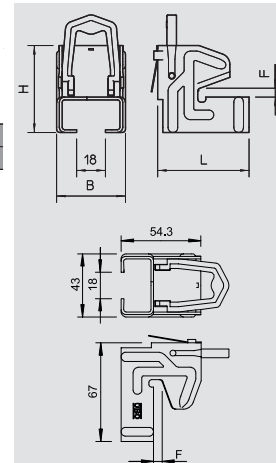

Profile rail, 1.25 mm material thickness



Type	Version	Dimension b x h	Material thickness	Length	Pack.	Weight	Item No.
		mm	mm	mm	pcs	kg/100 pcs.	
1268 L 150 FS	Perforated	35 x 18	1.25	150	25	10.600	1104 24 1
1268 L 200 FS	Perforated	35 x 18	1.25	200	25	14.200	1104 26 8
1268 L 300 FS	Perforated	35 x 18	1.25	300	25	21.300	1104 28 4
1268 L 400 FS	Perforated	35 x 18	1.25	400	10	28.400	1104 29 2
1268 L 500 FS	Perforated	35 x 18	1.25	500	10	35.500	1104 30 6
1268 L 600 FS	Perforated	35 x 18	1.25	600	10	42.600	1104 31 0
1268 L 700 FS	Perforated	35 x 18	1.25	700	10	49.700	1104 31 5
1268 L 800 FS	Perforated	35 x 18	1.25	800	10	56.800	1104 32 0
1268 L 900 FS	Perforated	35 x 18	1.25	900	10	63.900	1104 32 5
1268 L 1M FS	Perforated	35 x 18	1.25	1000	10	71.000	1104 49 7
1268 L 2M FS	Perforated	35 x 18	1.25	2000	20	71.000	1104 50 0

St Steel

FS Strip-galvanised

/100 m /100 pc.

Light-duty profile rail, perforated, slot width 17 mm.

Static values:


$A = 0,876 \text{ cm}^2$

$I_y = 0,406 \text{ cm}^4$

$I_z = 1,807 \text{ cm}^4$

$W_y = 0,413 \text{ cm}^3$

$W_z = 1,033 \text{ cm}^3$





Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Profile rails perforated, slot width 17 mm, 2000x35x18, Strip-galvanised, DIN EN 10147, Steel, St	1104500	1268 L 2M FS	Buy on EAN
Beam clamp with retaining spring, 5-11mm, Galvanised, Deltatone 500, Steel, St	1408011	328 1	Buy on EAN
Beam clamp with retaining spring, 10-19mm, Galvanised, Deltatone 500, Steel, St	1408046	328 2	Buy on EAN
Beam clamp heavyweight design, 44x63x43,5mm, Stainless steel, grade 304, VA, 1.4301	1486274	SPP 20-40 VA	Buy on EAN
Beam clamp heavyweight design, 44x63x43,5mm, Stainless steel, grade 316 L, VA, 1.4404	1486278	SPP 20-40 V4A	Buy on EAN