

The OMRON logo is displayed in a bold, blue, sans-serif font. The letters are thick and rounded, with the 'O' being a simple circle. The entire logo is set against a light yellow rectangular background.

Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking [HERE](#). [HERE](#)

Capacitive Proximity Sensor

E2K-X

Threaded Cylindrical Capacitive Proximity Sensor

- Detects almost any kind of metallic and nonmetallic objects, including glass, lumber, water, oil, and plastic.
- Three choices of threaded cylinder sizes for easy installation: M12, M18, and M30
- All models equipped with an LED indicator for operation monitoring.
- Fixed sensing distance requires no sensitivity adjustment.



Ordering Information

Shield	Size	Sensing distance	DC 3-wire models				AC 2-wire models	
			NPN		PNP		NO	NC
			NO	NC	NO	NC		
Unshielded	M12	4 mm	E2K-X4ME1	E2K-X4ME2	E2K-X4MF1	E2K-X4MF2	E2K-X4MY1	E2K-X4MY2
	M18	8 mm	E2K-X8ME1	E2K-X8ME2	E2K-X8MF1	E2K-X8MF2	E2K-X8MY1	E2K-X8MY2
	M30	15 mm	E2K-X15ME1	E2K-X15ME2	E2K-X15MF1	E2K-X15MF2	E2K-X15MY1	E2K-X15MY2

Specifications

Model	E2K-X4ME(F)□	E2K-X8ME(F)□	E2K-X15ME(F)□	E2K-X4MY□	E2K-X8MY□	E2K-X15MY□
Supply voltage (operating voltage range) (see note 1)	12 to 24 VDC (10 to 30 VDC)			100 to 220 VAC (90 to 250 VAC)		
Current consumption	15 mA			2.2 mA max. (Refer to <i>Engineering Data</i> .)		
Sensing object	Conductors and dielectrics					
Sensing distance	4 mm±10%	8 mm±10%	15 mm±10%	4 mm±10%	8 mm±10%	15 mm±10%
Sensitivity	Fixed					
Differential travel	4% to 20% of sensing distance					
Control output	200 mA			10 to 200 mA		
Response frequency	100 Hz			10 Hz		
Indicator	Operation indicator (red)					
Circuit protection	Reverse connection protection, surge absorber			Surge absorber		
Setting distance (for standard sensing object) (see note 2)	0 to 2.8 mm with grounded object (50 x 50 x 1 mm)	0 to 5.6 mm with grounded object (50 x 50 x 1 mm)	0 to 10 mm with grounded object (50 x 50 x 1 mm)	0 to 2.8 mm with grounded object (50 x 50 x 1 mm)	0 to 5.6 mm with grounded object (50 x 50 x 1 mm)	0 to 10 mm with grounded object (50 x 50 x 1 mm)
Operating status (with sensing object approaching)	E1 models: Load ON, L-level output signal E2 models: Load OFF, H-level output signal			Y1 models: Load ON		


Model	E2K-X4ME(F)□	E2K-X8ME(F)□	E2K-X15ME(F)□	E2K-X4MY□	E2K-X8MY□	E2K-X15MY□
Ambient temperature	-25°C to 70°C (with no icing)		-10°C to 55°C (with no icing)	-25°C to 70°C (with no icing)		-10°C to 55°C (with no icing)
Ambient humidity	Operating: 35% to 95%					
Temperature influence	±20% max. of sensing distance at 23°C in the temperature range of -25°C to 70°C		±20% max. of sensing distance at 23°C in the temperature range of -10°C to 55°C	±20% max. of sensing distance at 23°C in the temperature range of -25°C to 70°C		±20% max. of sensing distance at 23°C in the temperature range of -10°C to 55°C
Voltage influence	E models: ±2% max. of sensing distance at a voltage between 80% and 120% of the rated power supply voltage			Y models: ±2% max. of sensing distance at a voltage between 90% and 110% of the rated power supply voltage		
Residual voltage	E models: 1.0 V max. under a load current of 200 mA and a cord length of 2 m			Y models: Refer to <i>Residual Load Voltage (Typical)</i> in the following <i>Engineering Data</i> .		
Insulation resistance	50 MΩ (at 500 VDC) between the case and current carry parts					
Dielectric strength	DC models: 1,000 VAC (50/60 Hz) for 1 min between the case and current carry parts AC models: 2,000 V (50/60 Hz) for 1 min between the case and current carry parts					
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions					
Shock resistance	Malfunction: 500 m/s ² (approx. 50G) 3 times each in X, Y, and Z directions.					
Enclosure rating	IEC IP66					
Weight (with 2-m cord)	Approx. 65 g	Approx. 145 g	Approx. 205 g	Approx. 65 g	Approx. 145 g	Approx. 205 g
Material	Case	Heat-resistant ABS resin				
	Sensing surface	Heat-resistant ABS resin				
Clamping nut	Polyacetal resin					

- Note:**
- DC models (i.e., Sensors with model numbers including the suffix “E”) operate with full-wave rectified power supplies at 24 VDC±20% (mean value).
 - The set distances are sensing distances applicable to standard sensing objects. Refer to *Engineering Data* for sensing distances applicable to other types of objects.

Engineering Data


Operating Range (Typical)

E2K-X4M□□, E2K-X8M□□, E2K-X15M□□

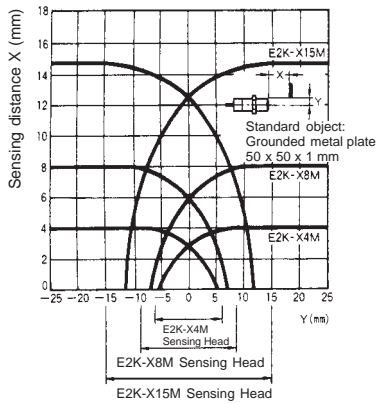


Leakage Current (Typical)

E2K-X□MY

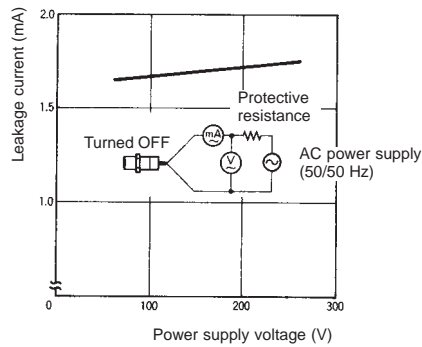


Sensing Object Size and Material vs. Sensing Distance (Typical)


E2K-X4M

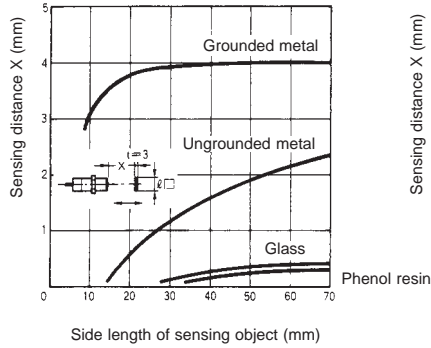

E2K-X8M

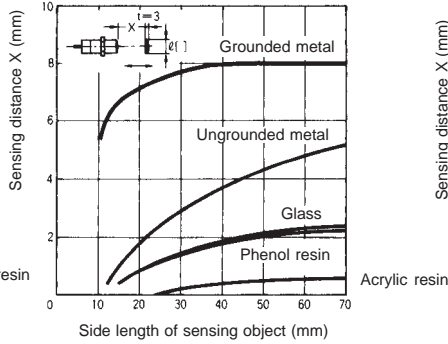


E2K-X15M

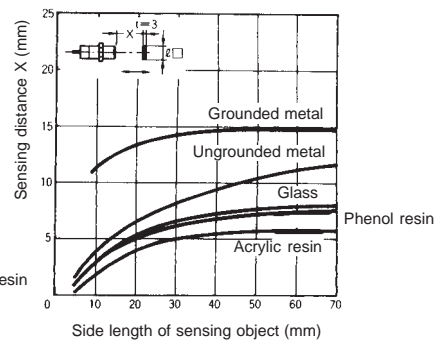


Sensing Object Thickness and Material vs. Sensing Distance (Typical)


E2K-X4M

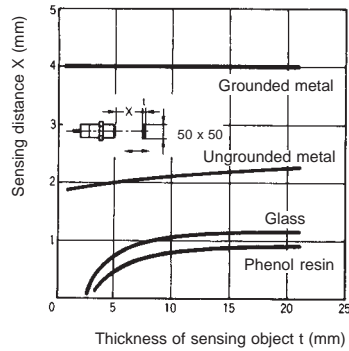

E2K-X8M



E2K-X15M

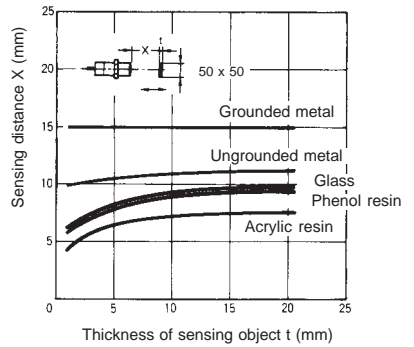


Operation

Output Circuits

Note: The lead wire colors of the E2K-X have been changed in compliance with the latest Japanese Industrial Standards. Colors in parentheses are previous ones.


DC 3-wire Models

NPN (E2K-X□ME□)

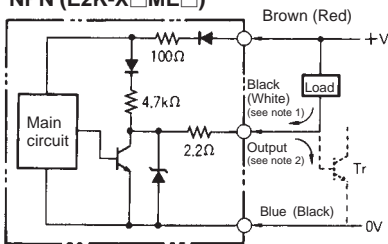

Note: 1. 200 mA max. (load current)
2. When a transistor is connected


PNP (E2K-X□MF□)

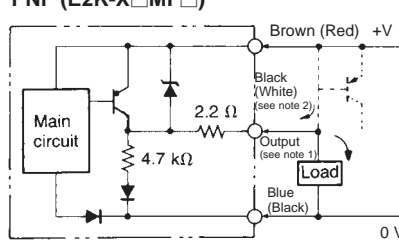

Note: 1. 200 mA max. (load current)
2. When a transistor is connected

AC 2-wire Models

NPN (E2K-X□MY□)

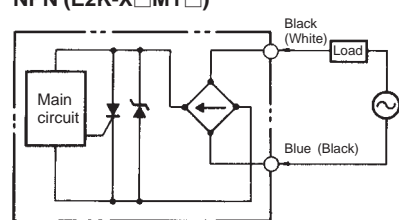



Timing Charts

E2K-X□ME(F)1

E2K-X□ME(F)2

E2K-X□MY(F)1


E2K-X□MY(F)2

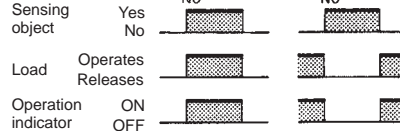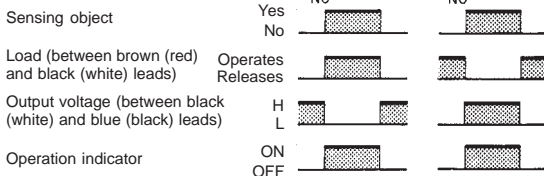

Dimensions

E2K-X4M□□

Weight: Approx. 65 g

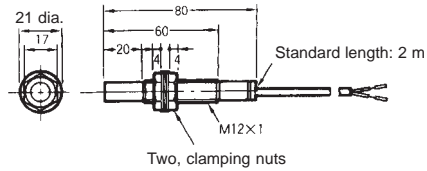

E2K-K-X4ME(F)1 and E2K-X4ME(F)2:


Oil- and vibration-resistant, vinyl-insulated round cord with three conductors, 4 dia. (0.2 mm² x 3); standard length: 2 m

E2K-K-X4MY1 and E2K-X4MY2:

Oil- and vibration-resistant, vinyl-insulated round cord with three conductors, 4 dia. (0.2 mm² x 2); standard length: 2 m

E2K-X8M□□

Weight: Approx. 145 g

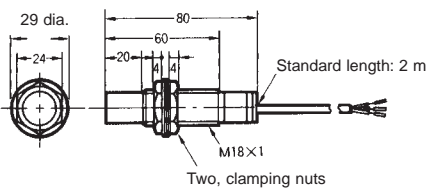

E2K-K-X8ME(F)1 and E2K-X8ME(F)2:


Oil- and vibration-resistant, vinyl-insulated round cord with three conductors, 6 dia. (0.2 mm² x 3); standard length: 2 m

E2K-K-X8MY1 and E2K-X8MY2:

Oil- and vibration-resistant, vinyl-insulated round cord with three conductors, 6 dia. (0.2 mm² x 2); standard length: 2 m

E2K-X15M□□

Weight: Approx. 205 g

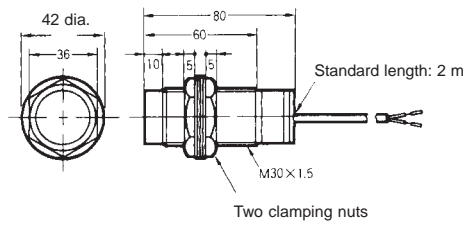


E2K-K-X15ME(F)1 and E2K-X15ME(F)2:

Oil- and vibration-resistant, vinyl-insulated round cord with three conductors, 6 dia. (0.2 mm² x 3); standard length: 2 m

E2K-K-X15MY1 and E2K-X15MY2:

Oil- and vibration-resistant, vinyl-insulated round cord with three conductors, 6 dia. (0.2 mm² x 3); standard length: 2 m


Mounting Holes



Model	F (mm)
E2K-X4ME(F)□ E2K-X4MY□	12.5 ^{+0.5} / ₀ dia.
E2K-X8ME(F)□ E2K-X8MY□	18.5 ^{+0.5} / ₀ dia.
E2K-X15ME(F)□ E2K-X15MY□	30.5 ^{+0.5} / ₀ dia.

Accessories (Order Separately)

Y92E-B□




Plastic mounting fixtures are available as options. Select the one suitable for the dimensions of the Sensor.


Precautions

Effects of Surrounding Metals and Mutual Influence

When mounting a Proximity Sensor flush with a metallic panel, or when installing two or more identical Sensors face-to-face or side-by-side, be sure to provide a minimum distance as shown in the following table. Using the minimum distances in the table will prevent the Sensor from being affected by metallic objects other than the sensing object or will prevent mutual interference between the two Sensors.

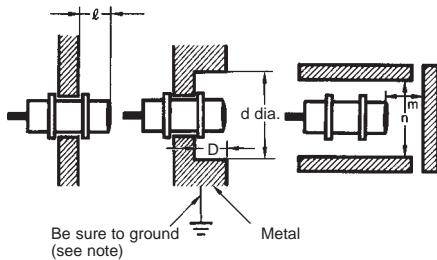


Note: Always ground the metallic panel or object; otherwise, the Sensor may malfunction.



Distance	Model		
	E2K-X4M□□	E2K-X8M□□	E2K-X15M□□
ℓ	20	20	10
d	50	50	50
D	20	20	10
m	8	12	25
n	60	60	60
A	80	150	300
B	70	110	200

Connection to the Load

Be sure to connect the Sensor to a power source through a load.
Direct connection of a power source may damage the Sensor
E2K-X4MY□, E2K-X8MY□, E2K-X15MY□

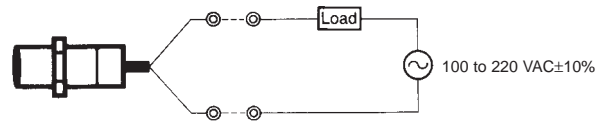

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. D017-E1-2 In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation

Systems Components Division H.Q.
28th Fl., Crystal Tower Bldg.
1-2-27, Shiromi, Chuo-ku,
Osaka 540 Japan
Phone: 06-949-6012 Fax: 06-949-6021

Printed in Japan
0897-0.5M a

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button.](#)

Product	Code	Reference	Product link
Proximity Sensor, Inductive M12 enr No 5mm 3h 5m cable NPN NC Lite	375213	E2B-M12KN05-WP-C2 5M	Buy on EAN
	127528		Buy on EAN
Monitoring relays, Accessory	156367	LG2-AB 220AC	Buy on EAN
Photoelectric sensor, through-beam, 30m, DC, 3-wire, NPN/PNP, vertical, 5m cable	130414		Buy on EAN
Low Voltage Switchgear, 18.5kW / 40A / AC3	118811	J7KN-40 48	Buy on EAN