




Automatización Eléctrica

Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

G5PA Relay Is Ideal for TV and Audio Equipment Power Supplies

- Meets TV-5 standards required for TV and audio equipment power supplies
- High sensitivity coil with low 250 mW power consumption
- High impulse withstand surge of 10,000V
- Double insulation construction assures high insulation capability
- UL, CSA, SEMKO, and TUV approved

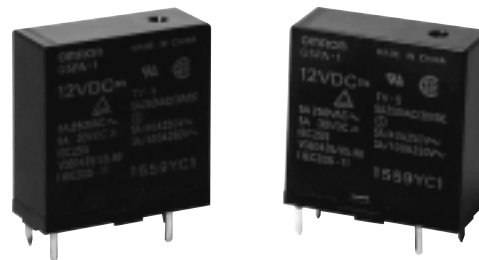

Ordering Information

Type	Contact form	Part number (semi-sealed)
Standard	SPST-NO	G5PA-1-8

■ HOW TO ORDER

G5PA-1-8-DC__ *add coil rating*

Specifications

■ CONTACT DATA

Type	Standard	
Load	Resistive (p.f. = 1)	Capacitive (TV) Load
Rated load	5A at 250 VAC; 5A at 30 VDC	100 A inrush (0.3-0.35 ms)/3 A steady state at 125 VAC
Contact material	AgSnO	
Carry current	5A	
Max. operating voltage	250 VAC, 30 VDC	
Max. operating current	5A	
Max. switching capacity	1,250 VA, 150 W	
Min. permissible load	100mA, 5 VDC	



■ COIL DATA – Standard

Rated voltage (VDC)	Rated current (mA)	Coil resistance (Ω)	Pickup voltage (----- % of rated voltage -----)	Dropout voltage	Maximum voltage	Power consumption (approx.)
5	50.8	100	80% max.	10% min.	110% max.	250mW
9	27.8	324	80% max.	10% min.	110% max.	250mW
12	20.8	577	80% max.	10% min.	110% max.	250mW
24	10.4	2,310	80% max.	10% min.	110% max.	250mW

■ CHARACTERISTICS

Contact resistance	100 m Ω max.	
Operate time	15 ms max.	
Release time	5 ms max.	
Insulation resistance	1,000 M Ω min. (at 500 VDC)	
Dielectric withstand voltage	4,000 VAC, 50/60 Hz for 1 minute between coil and contact 1,000 VAC, 50/60 Hz for 1 minute between contacts of same polarity	
Impulse withstand voltage	10,000 V, 1.2x50 μ s between coil and contact	
Vibration resistance	Destruction	10 to 55 Hz, 1.5-mm double amplitude for 2 hours
	Malfunction	10 to 55 Hz, 1.5-mm double amplitude for 5 minutes
Shock resistance	Destruction	1,000 m/s ² (approx. 100G)
	Malfunction	200 m/s ² (approx. 20G)
Life expectancy	Mechanical	1,000,000 operations min. (at 18,000 operations/hr)
	Electrical	80,000 operations min. with resistive load (reference value) 40,000 operations min. (under rated TV-Capacitive Load)
Ambient temperature	Operating	-40°C to 70°C (with no icing)
Ambient humidity	Operating	35% to 85%
Weight	Approx. 10g	

■ CHARACTERISTIC DATA

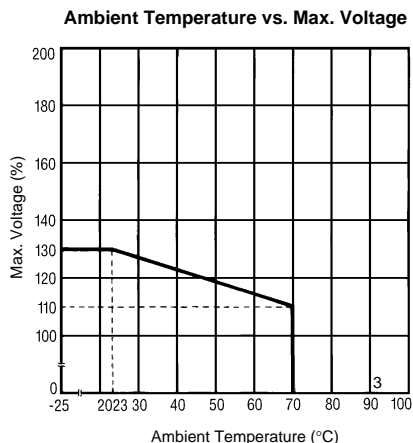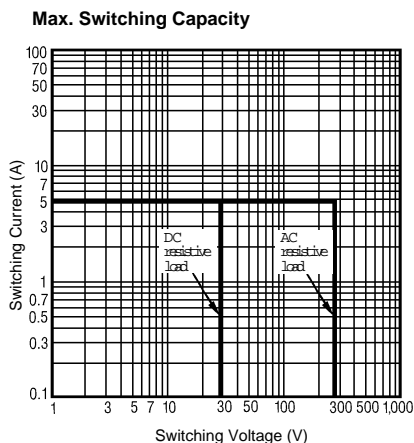


NOTE: The maximum voltage is the permissible peak voltage that can be imposed on the coil. The maximum voltage must not be imposed on the coil continuously.

Dimensions

Unit: mm (inch)

■ SPST-NO TYPE

G5PA-1

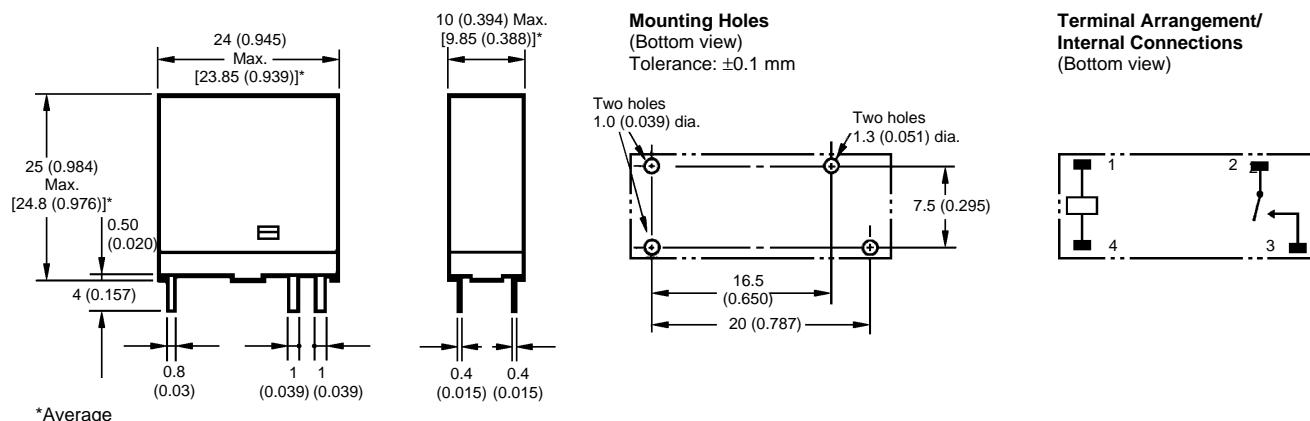

■ APPROVED STANDARDS

UL (File No. E41515, UL508)

CSA (File No. LR31928, C22.2 No. 14)

Model	Coil ratings	Contact ratings	No. of test operations
G5PA-1	5 to 24 VDC	5 A, 277 VAC	30,000
		5 A, 30 VDC	6,000
		TV-5 rating	25,000

TUV (Certificate No. R9650435, IEC255/VDE0435)

Model	Coil ratings	Contact ratings	No. of test operations
G5PA-1	5 to 24 VDC	5 A, 250 VAC ($\cos\phi=1$) 5 A, 30 VDC (L/R : 0 ms)	100,000

SEMCO (Certificate No. 9732043; EN60065)

Model	Coil ratings	Contact ratings	No. of test operations
G5PA-1	5 to 28 VDC	5 A/40 A, 250 VAC 3 A/100A, 250 VAC	10,000

NOTE: DIMENSIONS ARE SHOWN IN MILLIMETERS. To convert millimeters to inches divide by 25.4.

OMRON
OMRON ELECTRONICS, INC.

One East Commerce Drive
Schaumburg, IL 60173
1-800-55-OMRON
OMRON CANADA, INC.

885 Milner Avenue
Scarborough, Ontario M1B 5V8
416-286-6465



Automatización Eléctrica
Especialistas en Automatización

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
	142745		Buy on EAN