



**Automatización Eléctrica**  
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

## Housing - HC-EVO-D15-SLWS-2SSM25-PLR-BK - 1411341

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Box mounting bases D15, With single locking latch, Material: Polyamide, Cable outlets: 2, Lateral, Height: 52 mm, Cable gland: none, Gland: no, 2x M25, Standard

### Why buy this product

- Flexible cable outlet direction, lateral or straight
- Lower costs than metal version
- Labeling option using 9 x 20 mm marking label
- Low weight
- Lower risk of condensation
- Both contact insert PE sheets are connected by means of a metal frame integrated in the sleeve housing
- Metal inlays ensure leading PE contact with angled plugs
- Completely corrosion-resistant
- Halogen-free plastic
- Impact test according to IK 08

### Key Commercial Data

Packing unit	1 STK
GTIN	 4 046356 929127

### Technical data

#### Dimensions

Height	52 mm
Width	51 mm
Length	80 mm

#### Ambient conditions

Degree of protection of housing (IP)	IP66
Degree of protection of housing (NEMA)	4 (UL50e / NEMA 250)
	4X (UL50e / NEMA 250)
	12 (UL50e / NEMA 250)
Ambient temperature (operation)	-40 °C ... 125 °C

#### General

# Housing - HC-EVO-D15-SLWS-2SSM25-PLR-BK - 1411341

## Technical data

### General

Note	For contact inserts HC-D15, A10
Size	D15
Housing type	Box mounting bases
Color	black
Locking type	With single locking latch
No. of cable outlets	2
Cable exit	Lateral
Screw connection	none
Type of the screw connection	2x M25
Housing material	Polyamide
Material lock	Polyamide
Flammability rating according to UL 94	V0
Connection	One of the two openings for the screw connections is sealed but can be broken open using a screwdriver.

### Standards and Regulations

Flammability rating according to UL 94	V0
--	----

## Classifications

### eCl@ss

eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 8.0	27440202
eCl@ss 9.0	27440202

### ETIM

ETIM 4.0	EC000437
ETIM 5.0	EC000437

## Approvals

### Approvals

Approvals

EAC / GL

Ex Approvals

Approvals submitted

## Housing - HC-EVO-D15-SLWS-2SSM25-PLR-BK - 1411341

### Approvals


#### Approval details

EAC

GL

### Drawings

Dimensional drawing

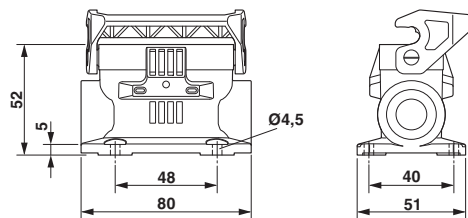

Dimensional drawing

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, [click on the green button](#).

Product	Code	Reference	Product link
Box mounting bases D15, With single locking latch, Material: Polyamide, Cable outlets: 2, Lateral, Height: 52 mm, Cable gland: none, Gland: no, 2x M25, Standard	1411341	HC-EVO-D15-SLWS-2SSM25-PLR-BK	<a href="#">Buy on EAN</a>